

Connector - PV-C4M-S 2,5-6 (-) - 1020775


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Photovoltaic connector, Range of articles: Sunclix, Connector, housing material: PPE, color: black, number of positions: 1, min. conductor cross section: 2.5 mm², max. conductor cross section: 6 mm², rated voltage: 1500 V DC, rated current: 35 A, Connection method: Spring-cage, Type of contact: Pin, min. cable diameter: 5 mm, max. cable diameter: 8 mm

RoHS

Key Commercial Data

Packing unit	1 pc
Minimum order quantity	50 pc
GTIN	 4 055626 511283
GTIN	4055626511283
Weight per Piece (excluding packing)	19.600 g
Custom tariff number	85359000
Country of origin	India

Technical data

Item properties

Range of articles	Sunclix
Brief article description	Connector
Product feature	DC connector, 1-pos., socket (+)
Color	black
Connection method	Spring-cage
Type of contact	Pin
Number of positions	1
Head GRP	Kabelklemmung

Product dimensions

Connector - PV-C4M-S 2,5-6 (-) - 1020775

Technical data

Product dimensions

Width	20 mm
Height	27.4 mm
Length	82.6 mm

Rated current	35 A (in accordance with IEC 62852:2014-11)
	30 A (in accordance with IEC 62852:2014-11)
	20 A (in accordance with IEC 62852:2014-11)
	30 A (in accordance with UL 6703)
	35 A (in accordance with UL 6703)
	50 A (in accordance with UL 6703)
Rated voltage	1500 V DCII 2 (in accordance with IEC 62852)
	1500 V DC (in accordance with UL 6703)
Protection class	II

Connection data

Min. wire cross section	2.5 mm ²
Max. wire cross section	6 mm ²
Min. wire cross section	14 AWG
Max. wire cross section	10 AWG
Cable diameter	5 mm ... 8 mm
Stripping length of the individual wire	15 mm
Torque	2 Nm ±0.1 Nm (Cable gland)

Environmental data

Ambient temperature (operation)	-40 °C ... 85 °C (dependent on the derating curve)
Ambient temperature (assembly)	-5 °C ... 50 °C
Limiting temperatures_GRP	105.00 °C

Mechanical tests

Insertion force	45 N ±10 N
-----------------	------------

Service life tests

Degree of protection	IP66 / IP68 (2 m / 24 h)
Insertion/withdrawal cycles	100

Contact material_GRP	Cu alloy silver-plated
Flammability rating according to UL 94	V0
Halogen-free	yes

Detail specification

Detail specification	IEC 62852
----------------------	-----------

Connector - PV-C4M-S 2,5-6 (-) - 1020775


Technical data

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings

Dimensional drawing

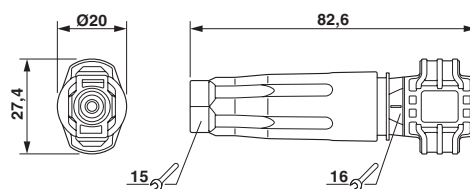

Classifications

eCl@ss

eCl@ss 10.0.1	27440102
eCl@ss 11.0	27440102
eCl@ss 9.0	27440102

ETIM

ETIM 7.0	EC002635
----------	----------

UNSPSC

UNSPSC 18.0	39121413
UNSPSC 19.0	39121413
UNSPSC 20.0	39121413
UNSPSC 21.0	39121413

Accessories

Accessories

Photovoltaic connector

Protective cap - PV-C PROTECTION CAP - 1785430



Photovoltaic connector, Range of articles: Sunclix, Protective cap, color: black, self-sealing, without interlock, set consisting of: 1 protective cap for connector side and 1 protective cap for coupling side

Connector - PV-C4M-S 2,5-6 (-) - 1020775

Accessories

Filler plugs - PV-C-PLUG-HV - 1623478



Photovoltaic connector, Range of articles: Sunclix, Filler plugs, housing material: PA 6

Screwdriver tools

Screwdriver - SZF 1-0,6X3,5 - 1204517



Actuation tool, for ST terminal blocks, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

Stripping tool

Stripping pliers - QUICK WIREFOX 6 SC - 1207637



Stripping tool for short-circuit proof conductors, stripping range: 1.5 up to 6 mm², wire cutting up to 6 mm² cable stopper up to 18 mm²

Stripping tool - WIREFOX-D SR 6-1 - 1212511



Stripping tool, for standard 2.5, 4, and 6 mm² solar cables, with 15 mm length stop, for SUNCLIX field connectors
