
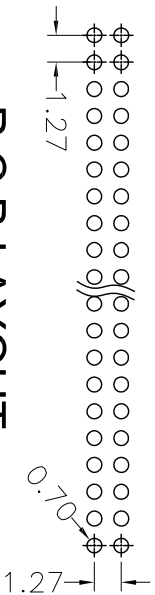

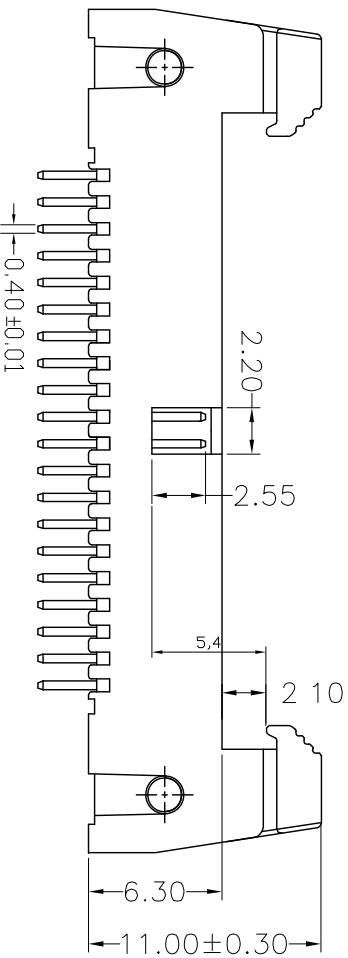


# RoHS

**NOTES:**

- Insulator Material: PBT, UL 94V-0
- Contact Plating: Flash Gold
- Contact Material: Brass
- Current Rating : 1A AC,DC
- Contact Resistance: 20MΩ Max.
- Dielectric Withstanding: AC 500V
- Insulator Resistance: 1000MΩ Min.
- Operating Temp.: -40°C~+105°C

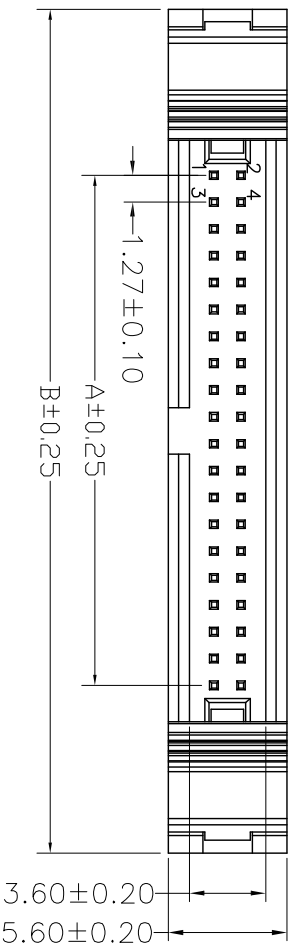

## P.C.B LAYOUT


NUMBER OF POSITIONS	DIMENSIONS	
	A	B
06	2.54	18.31
08	3.81	19.58
10	5.08	20.85
12	6.35	22.12
14	7.62	23.39
16	8.89	24.66
18	10.16	25.93
20	11.42	27.20
24	13.97	29.74
26	15.24	31.01
30	17.78	33.55
34	20.32	36.09
40	24.13	39.90
50	30.48	46.25
60	36.83	52.60
64	39.37	55.14

### CnC Tech,LLC

Part No.

3210-XX-001-12-00

UNLESS TOLERANCE		DRAW BY	
GENERAL	ANGLE	DESIGN BY	CHECK BY
X ± 0.30	X° ± 3.0°		
.X ± 0.20	.X° ± 2.0°		
.XX ± 0.15	.XX° ± 1.0°		
.XXX ± 0.08	.XXX ± 0.5°		
	APPROVE BY	SCALE	SHEET
		1:1	1/1
		MM	UNIT



SCALE	SHEET	UNIT
1:1	1/1	MM

DRAW NO:	REV: A
----------	--------