






1

2

3

4

5

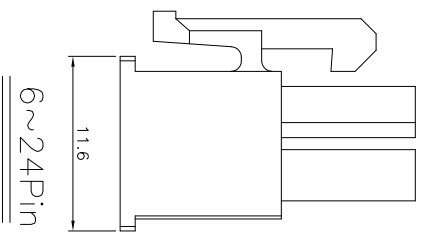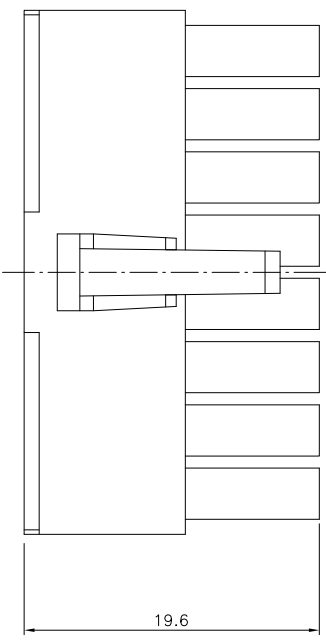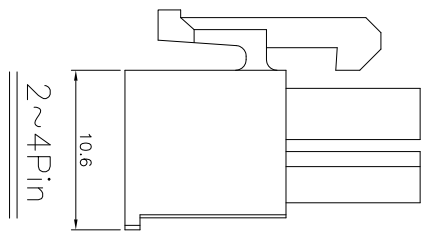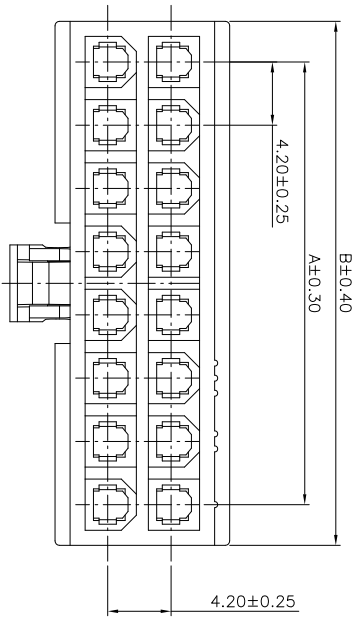

Specifications:
 Current Rating:9.0A AC/DC
 Voltage Rating:600V AC/DC
 Contact Resistance:10m Ohm. Max.
 Insulation Resistance:1,000M Ohm. Min.
 Withstanding Voltage:1500V AC/Minute
 Operating Temperature Range:-40°C ~ +105°C

Material And Finish:
 Insulator:Nylon 66 (UL94V-0)
 Color:White

Dimension:

Circuits	DIM.A	DIM.B	Circuits	DIM.A	DIM.B
2	4.20	5.40	14	25.20	30.60
4	8.40	9.60	16	29.40	34.80
6	12.60	13.80	18	33.60	39.00
8	16.80	18.00	20	37.80	43.20
10	21.00	22.20	22	42.00	47.40
12	25.20	26.40	24	46.20	51.60

DRAWN:
 CHECKED:
 APPROVAL:

GENERAL TOLERANCE:
 .X = ±0.40
 .XX = ±0.30













REV	DATE	FILE	BY

UNIT: MM
 SCALE:1:1
 SHEET: 1 / 3
 PROJECTION:

DESCRIPTION:
 CONN RECEPT DUAL 94V-0
 PART NO:
 4281-2-XX-D

SIZE
 A4

RoHS Compliant

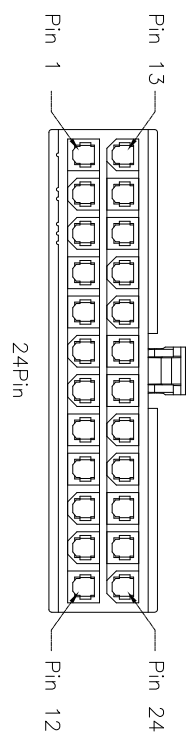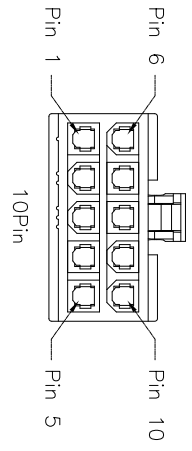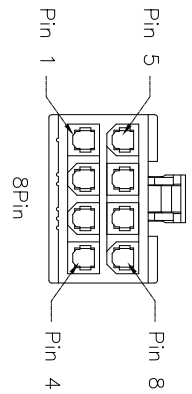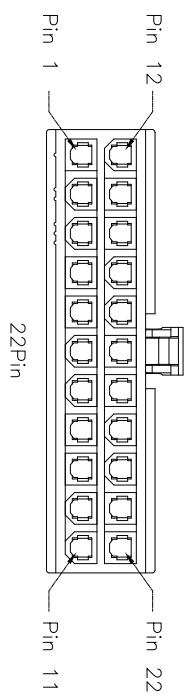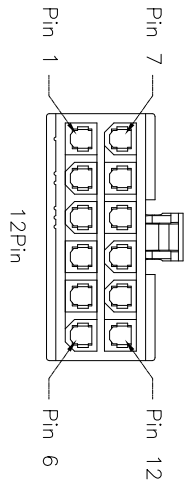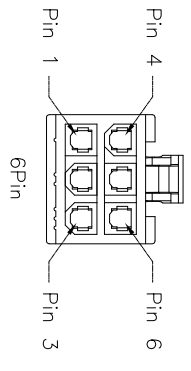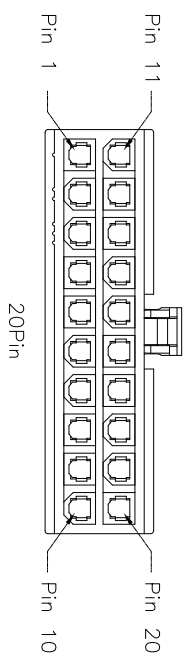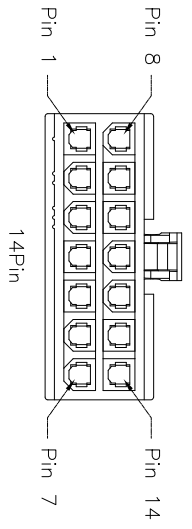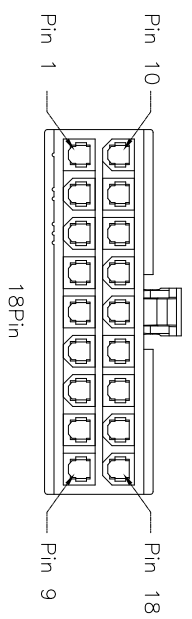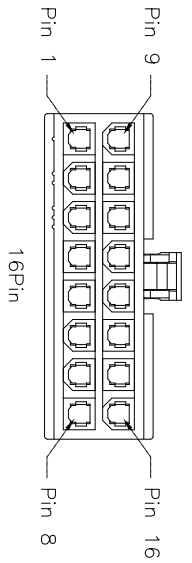

2~24Pin Drawing(Ref.)

RoHS Compliant

REV	DATE	FILE	BY	DRAWN:	CHECKED:	APPROVAL:	GENERAL TOLERANCE: .X = ±0.40 .XX = ±0.50	DESCRIPTION: CONN RECEPT DUAL 94V-0	SIZE
							UNIT: MM	Industrial Cable and Connector Technology	A4
							SCALE: 1:1	CnC Tech	
							SHEET: 2 / 3	Part No: 4281-2-XX-D	
							PROJECTION:		




1

2

3



4

5

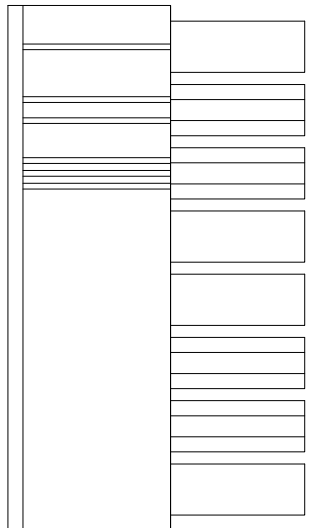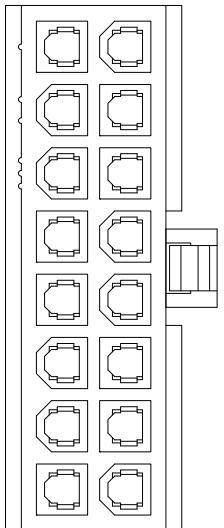


Note:
1. Dimension:
Carton Size: 40*28*28(cm)


PE BAG



Pin.	Pcs/Bag	Pcs/Carton	Pin.	Pcs/Bag	Pcs/Carton
2	1000	14000	14	100	2000
4	200	7600	16	100	1600
6	200	4800	18	100	1600
8	200	4000	20	100	1200
10	100	3000	22	100	1200
12	100	2600	24	100	1200



Carton (SC 4:1)

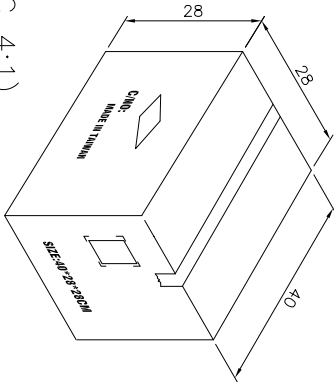

RoHS Compliant

DRAWN:		GENERAL TOLERANCE:		DESCRIPTION:	SIZE
CHECKED:		.X = ±0.20 .XX = ±0.15			
APPROVAL:		UNIT: MM		PART NO:	D
		SCALE: 1:1			
		SHEET: 3 / 3			
		PROJECTION:			
REV	DATE	FILE	BY		

CnC Tech
Industrial Cable and Connector Technology