


PART NO. SEE CHART
 DWG. NO. SD-92315-001

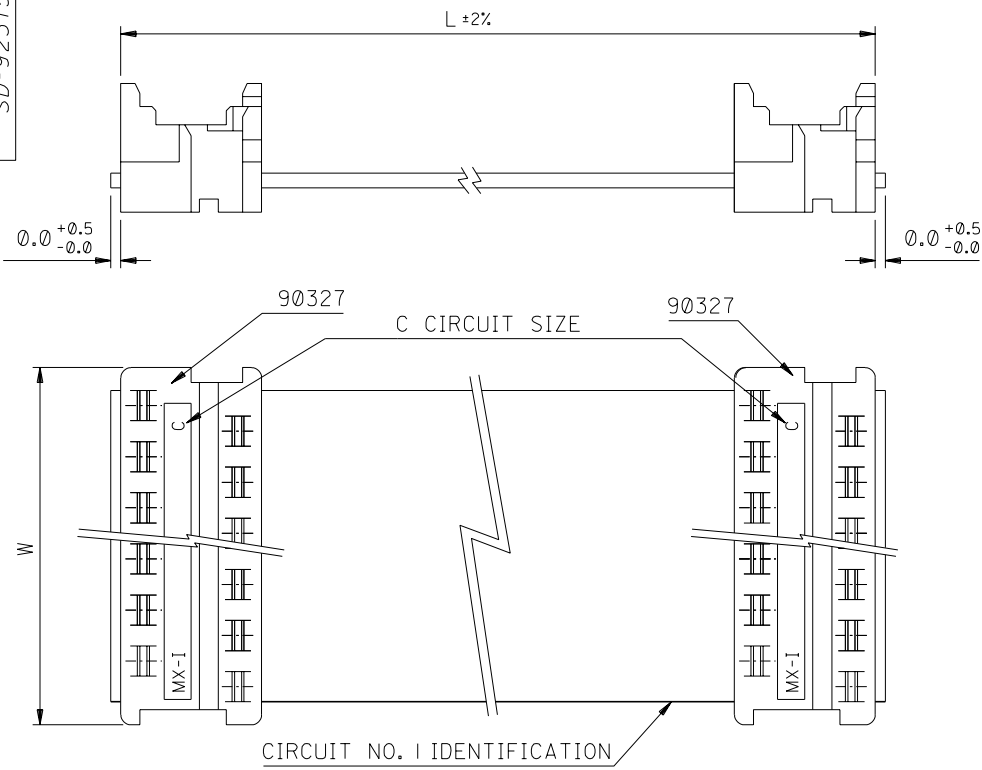

| 90327 CONNECTOR | |
|-----------------|-------------|
| CIRCUIT SIZE | DIMENSION W |
| 4 | 7.59 |
| 6 | 10.13 |
| 8 | 12.67 |
| 10 | 15.21 |
| 12 | 17.75 |
| 14 | 20.29 |
| 16 | 22.83 |
| 18 | 25.37 |
| 20 | 27.91 |
| 22 | 30.45 |
| 24 | 32.99 |
| 26 | 35.53 |

CABLE DETAILS:
 28 AWG , 1.27 MM PITCH , 7 STRANDS WITH TINNED COPPER ,
 GREY PVC INSULATION WITH A COLOURED POLARITY STRIPE
 INDICATING CIRCUIT NO. 1 , UL 2651.

ORDERING INFORMATION

92315-****
 CIRCUIT SIZE
 LENGTH L IN CENTIMETRES
 LENGTHS AVAILABLE FROM 6 CM TO 120 CM
 e.g. 92315-1208 = 12 CIRCUIT
 WITH LENGTH L OF 8 CM.

NOTE : FOR LENGTHS OF
 100 CM , THE PART NO. IS 92315-**01
 105 CM , THE PART NO. IS 92315-**02
 110 CM , THE PART NO. IS 92315-**03
 115 CM , THE PART NO. IS 92315-**04
 120 CM , THE PART NO. IS 92315-**05

NOTES:

1. SEE PRODUCT SPECIFICATIONS PS-99020-0011.
2. SEE TERMINATION SPECIFICATION ES-99033-0001.
3. SEE CABLE SPECIFICATION ES-99027-0006.
4. HARNESSES WILL BE 100% ELECTRICALLY TESTED FOR SHORTS AND DISCONTINUITIES.

| | | | | | | | |
|---|--|--|---------------------|---------------------------------------|--|--|---|
| ADDED OPTION EC NO. 2002-1088 DRAWN: MKUBOVCI 02/06/07 CHK: / / / / APPR: / / / / | QUALITY SYMBOLS MAJOR = CRITICAL = | GENERAL TOLERANCES: (UNLESS SPECIFIED) | | SCALE 4 : 1 | DESIGN UNITS <input checked="" type="checkbox"/> mm <input type="checkbox"/> INCH | DIMENSIONS: <input type="checkbox"/> mm <input type="checkbox"/> INCH <input checked="" type="checkbox"/> mm ONLY | SHT REV |
| | | 4 PLACES ±0. ±. | 3 PLACES ±0. ±. | 2 PLACES ±0. ±. | 1 PLACE ±0. ±. | ANGULAR: ± 1/2 ° | DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS |
| REV B | DESCRIPTION | DRAWN BY & DATE MCURRAN 98/06/19 | | CHECKED BY & DATE AMcCANN 98/06/19 | | APPROVED BY & DATE MWILHITE 98/06/19 | |
| | | TITLE: PICO FLEX IDT TO IDT STANDARD ASSEMBLIES | | MOLEX INCORPORATED | | CAD FILENAME: S92315X1.DGN MATERIAL NO.: SEE CHART DRAWING NO.: SD-92315-001 SHEET NO.: 1 OF 1 | |