

DTD113EK

NPN 500mA 50V Digital Transistors (Bias Resistor Built-in Transistors)

Parameter	Value
V _{CC}	50V
I _{C(MAX.)}	500mA
R ₁	1kΩ
R ₂	1kΩ

Features

- 1) Built-In Biasing Resistors, $R1 = R2 = 1k\Omega$.
- Built-in bias resistors enable the configuration of an inverter circuit without connecting external input resistors (see inner circuit).
- The bias resistors consist of thin-film resistors with complete isolation to allow negative biasing of the input. They also have the advantage of completely eliminating parasitic effects.
- 4) Only the on/off conditions need to be set for operation, making the circuit design easy.
- 5) Complementary PNP Types :DTB113EK series
- 6) Lead Free/RoHS Compliant.


Application

Switching circuit, Inverter circuit, Interface circuit, Driver circuit


Packaging specifications

Part No.	Package	Package size (mm)	Taping code	Reel size (mm)	Tape width (mm)	Basic ordering unit (pcs)	Marking
DTD113EK	SMT3	2928	T146	180	8	3,000	F21

Outline



Inner circuit



●Absolute maximum ratings (Ta = 25°C)

Parameter	Symbol	Values	Unit
Supply voltage	V _{CC}	50	V
Input voltage	V _{IN}	-10 to +10	V
Collector current	I _C *1	500	mA
Power dissipation	P_{D}^{*2}	200	mW
Junction temperature	Тj	150	°C
Range of storage temperature	T _{stg}	-55 to +150	°C

•Electrical characteristics(Ta = 25°C)

Parameter	Symbol	Conditions	Min.	Тур.	Max.	Unit
	V _{I(off)}	$V_{CC} = 5V, I_{O} = 100 \mu A$	-	-	0.5	V
Input voltage	V _{I(on)}	$V_0 = 0.3V, I_0 = 20mA$	3.0	-	-	V
Output voltage	V _{O(on)}	I _O / I _I = 50mA / 2.5mA	-	0.1	0.3	V
Input current	I _I	$V_1 = 5V$	-	-	7.2	mA
Output current	I _{O(off)}	$V_{CC} = 50V, \ V_I = 0V$	-	-	0.5	μA
DC current gain	G _I	$V_0 = 5V, I_0 = 50mA$	33	-	-	-
Input resistance	R ₁	-	0.7	1	1.3	kΩ
Resistance ratio	R ₂ /R ₁	-	0.8	1	1.2	-
Transition frequency	f _T *1	V _{CE} = 10V, I _E = -50mA, f = 100MHz	-	200	-	MHz

*1 Characteristics of built-in transistor

*2 Each terminal mounted on a reference footprint

•Electrical characteristic curves(Ta = 25°C)




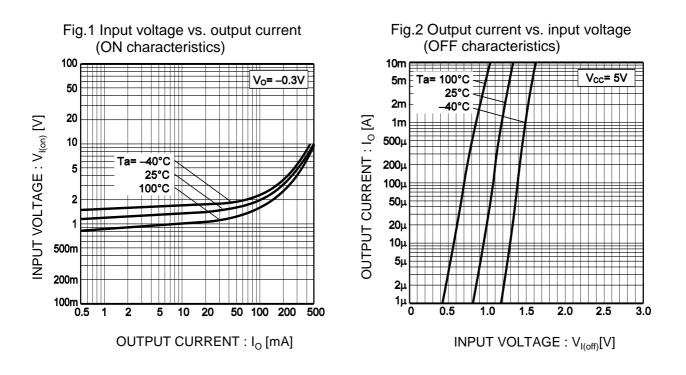


Fig.3 Output current vs. output voltage



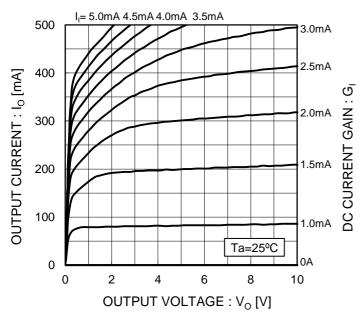

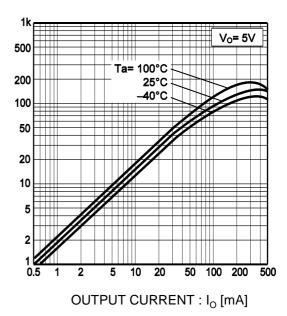

•Electrical characteristic curves(Ta = 25°C)


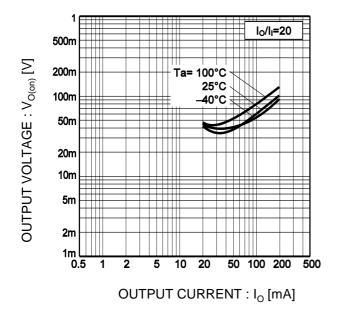


Fig.5 Output voltage vs. output current

•Dimensions (Unit : mm)

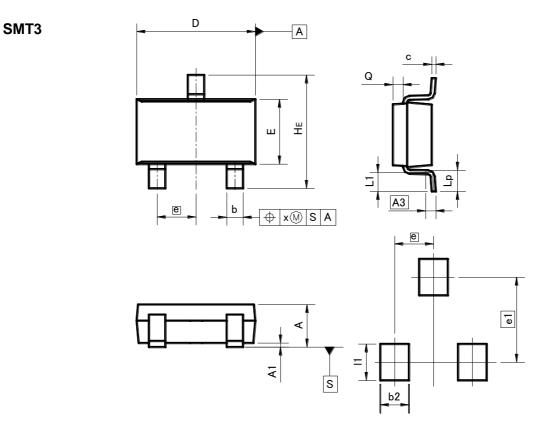

Patterm of terminal position areas

DIM	MILIM	ETERS	INC	HES
DIM	MIN	MAX	MIN	MAX
А	1.00	1.30	-	0.051
A1	0.00	0.10	0	0.004
A3	0.5	25	0.0	01
b	0.35	0.50	0.014	0.02
С	0.09	0.25	0.004	0.01
D	2.80	3.00	0.11	0.118
Е	1.50	1.80	0.059	0.071
е	0.9	95	0.0	04
HE	2.60	3.00	0.102	0.118
L1	0.30	0.60	0.012	0.024
Lp	0.40	0.70	0.016	0.028
Q	0.20	0.30	0.008	0.012
х	_	0.10	_	0.004
У	-	0.10	_	0.004

DIM	MILIMETERS		INC	HES
DIM	MIN MAX		MIN	MAX
e1	2.10		0.08	
b2		0.60	-	0.024
1	_	0.90	-	0.035

Dimension in mm/inches

www.rohm.com $\ensuremath{\textcircled{O}}$ 2012 ROHM Co., Ltd. All rights reserved.

	ing or reproduction of this document, in part or in whole, is permitted without the of ROHM Co.,Ltd.
The cont	ent specified herein is subject to change for improvement without notice.
"Product	ent specified herein is for the purpose of introducing ROHM's products (hereinafte s"). If you wish to use any such Product, please be sure to refer to the specifications n be obtained from ROHM upon request.
illustrate	s of application circuits, circuit constants and any other information contained hereir the standard usage and operations of the Products. The peripheral conditions mus- into account when designing circuits for mass production.
However	re was taken in ensuring the accuracy of the information specified in this document should you incur any damage arising from any inaccuracy or misprint of such on, ROHM shall bear no responsibility for such damage.
examples implicitly other par	nical information specified herein is intended only to show the typical functions of and s of application circuits for the Products. ROHM does not grant you, explicitly of any license to use or exercise intellectual property or other rights held by ROHM and ties. ROHM shall bear no responsibility whatsoever for any dispute arising from the ch technical information.
equipme	lucts specified in this document are intended to be used with general-use electronic nt or devices (such as audio visual equipment, office-automation equipment, commu- devices, electronic appliances and amusement devices).
The Prod	ucts specified in this document are not designed to be radiation tolerant.
	OHM always makes efforts to enhance the quality and reliability of its Products, a may fail or malfunction for a variety of reasons.
against t failure of shall bea	e sure to implement in your equipment using the Products safety measures to guard he possibility of physical injury, fire or any other damage caused in the event of the any Product, such as derating, redundancy, fire control and fail-safe designs. ROHM r no responsibility whatsoever for your use of any Product outside of the prescribed not in accordance with the instruction manual.
system w may resu instrume controlle of the Pr	lucts are not designed or manufactured to be used with any equipment, device or which requires an extremely high level of reliability the failure or malfunction of which it in a direct threat to human life or create a risk of human injury (such as a medica nt, transportation equipment, aerospace machinery, nuclear-reactor controller, fuel- r or other safety device). ROHM shall bear no responsibility in any way for use of any oducts for the above special purposes. If a Product is intended to be used for any cial purpose, please contact a ROHM sales representative before purchasing.
be contro	end to export or ship overseas any Product or technology specified herein that may olled under the Foreign Exchange and the Foreign Trade Law, you will be required to icense or permit under the Law.



Thank you for your accessing to ROHM product informations. More detail product informations and catalogs are available, please contact us.

ROHM Customer Support System

http://www.rohm.com/contact/



dtd113ek - Web Page

Distribution Inventory

Part Number	dtd113ek
Package	SMT3
Unit Quantity	3000
Minimum Package Quantity	3000
Packing Type	Taping
Constitution Materials List	inquiry
RoHS	Yes