THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	WIRE RANGE AWG [mm²]	MAX. WIRE INSUL. DIA.	HOUSING COLOR	DIMENSIONS in. [mm]				TOOLS
				L ± .03 [0,8]	B ± .01 [0,3]	C ± .02 [0,3]	D DIA	
EV18-P47B	#22-18 [0,5-1,0]	.15 [3,8]	RED	.97 [24,6]	.07 [1,8]	.49 [12,4]	.15 [3,8]	CT-100A **CT-260 CT-600A (CT-550CH) CT-1550 CT-1551 CT-2500 (CT-2550CH)
EV14-P47B	#16-14 [1,5-2,5]	.17 [4,3]	BLUE	.97 [24,6]	.07 [1,8]	.49 [12,4]	.17 [4,3]	
EV10-P55*	#12-10 [4,0-6,0]	.25 [6,4]	YELLOW	1.10 [27,9]	.10 [2,5]	.55 [14,0]	.25 [6,35]	

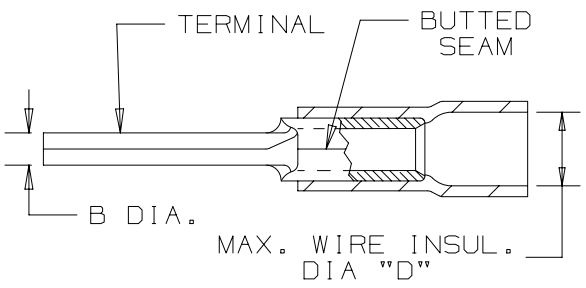

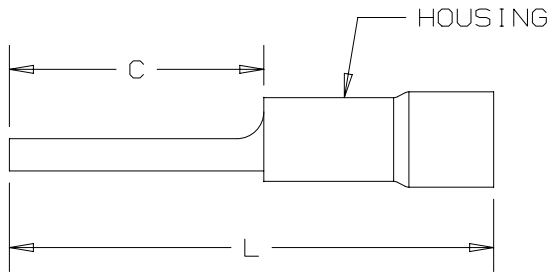

* EV10-P55 NOT UL LISTED, BRAZED SEAM, 300V MAX VOLTAGE
**PANDUIT APPROVED TOOL

NOTES:
1. UL LISTED FOR:
   A. SOILD OR STRANDED COPPER WIRE ONLY
   B. 221°F [105°C] MAX. OPERATING TEMPERATURE
   C. 600V. MAX. VOLTAGE RATING

2. MATERIAL:
   A. STAMPING: .03" [0,8] THK COPPER, TIN PLATED
   B. HOUSING: VINYL, COLOR CODED

3. WIRE STRIP LENGTH: 5/16" $^{+1/32}_{-0}$ [7,9mm $^{+0,8}_{-0}$]

4. SEE www.panduit.com FOR PACKAGE QUANTITIES

5. DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT

LISTED
587H
E52164

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
00	2/18	JHNU	TMR	RGB	RELEASED	00123SH

TITLE
STRONGHOLD PIN TERMINAL
VINYL INSULATED #22-10 AWG
CUSTOMER DRAWING

ITEM REVISION NAME: 00123STB/00
DATASET FILE NAME: 00123STB/00

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]
.X ± .XXX ±
.XX ± ANGLES ±
THIRD ANGLE PROJECTION

MATERIAL: SEE NOTES

DRAWING NUMBER: SH41335

DRAWN BY	DATE	CHK	SCALE	SIZE
JHNU	2/18	TMR	N.T.S.	A

SHT 1 OF 1

D10100DA/16

Downloaded from Arrow.com.