


RECOMMENDED PC BOARD LAYOUT,
COMPONENT SIDE
SEE PRINT 58351 FOR ADDITIONAL
PCB INFORMATION

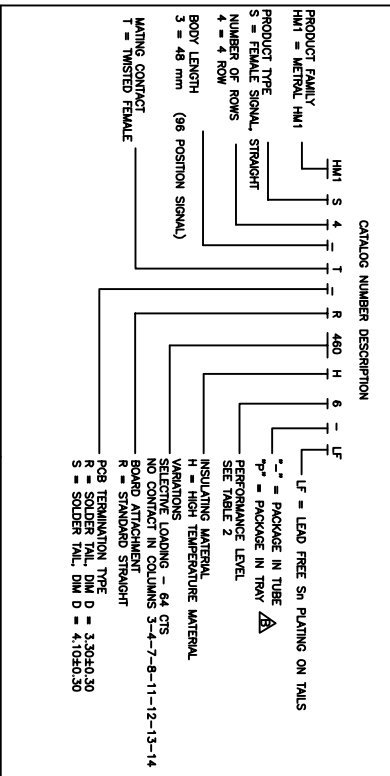

mat'l. code	ecrn no	dr	date	linear	angular	projection	title
A	D069-0028	Canh	2009/10/02	.X ± 0.2			T SERIES STRAIGHT RECEPTACLE ASSY, 4 ROW, STB, SELECT PIN
B	D011-0103	Canh	2011/04/07	.XX ± 0.005	0° ± 1°		

tolerances unless otherwise specified	CUSTOMER COPY	PERFORMANCE LEVEL
NONE ± 3E-1		TELCORDIA CO
X ± 0.2		
.XX ± 0.005		
0° ± 1°		

code	CONTACT AREA	PERFORMANCE LEVEL
6	0.75um Au min over 1.3um Ni min or 0.08um Au min over 1.3um Ni min	TELCORDIA CO

revision	sheet	index	code	code	code
B	1		10093360	22526	213

NOTES: UNLESS OTHERWISE SPECIFIED:

- CONNECTOR MATERIALS:
HOUSING: GLASS FILLED THERMOPLASTIC,
UL94-V0 COMPLIANT
TERMINAL: PHOSPHOR BRONZE ALLOY
- POSTFIX WITH "P" PACKED IN TRAY.
- FEATURE MAY OR MAY NOT BE PRESENT DEPENDING UPON THE MOLD TOOL USED TO PRODUCE PRODUCT.
- PRODUCT SPECIFICATION: GS-12-177.
- APPLICATION SPECIFICATION: GS-20-015.
- THE PRODUCTS WHERE THE PART NUMBER ENDS IN "LF" MEET THE EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
- ALL PRODUCTS WILL WITHSTAND EXPOSURE TO 260°C FOR 60 SECONDS IN A CONNECTION, INFRARED OR VAPOR PHASE REFLOW OVEN.
- LOCATION PEGS ONLY EXISTED IN ONE MODULE TYPE.

