

CASE FINISH	CURRENT (AMPS)	WORKING VOLTAGE				MAXIMUM DC RESISTANCE (OHMS)	MAXIMUM VOLTAGE DROP		MINIMUM CAPACITANCE (uF)	MIN. INSERTION LOSS PER MIL-STD-220, FULL LOAD, +25°C													
		-55°C TO +85°C		-55°C TO +125°C			DC	AC		14 KHz	30 KHz	50 KHz	75 KHz	100 KHz	150 KHz	300 KHz	500 KHz	1 MHz	10 MHz	100 MHz	1 GHz	10 GHz	
		AC	DC	AC	DC					---	---	---	---	29	31	35	---	35	70	70	70	---	
SOLDER	20	---	150	---	100	0.005	0.05	----	5.2	12	---	---	---	---	29	31	35	---	35	70	70	70	---

PART MARKING:


SCI-R6130-009
DATE CODE

PACKAGE MARKING:

STANDARD

MARKING NOTES:

N/A

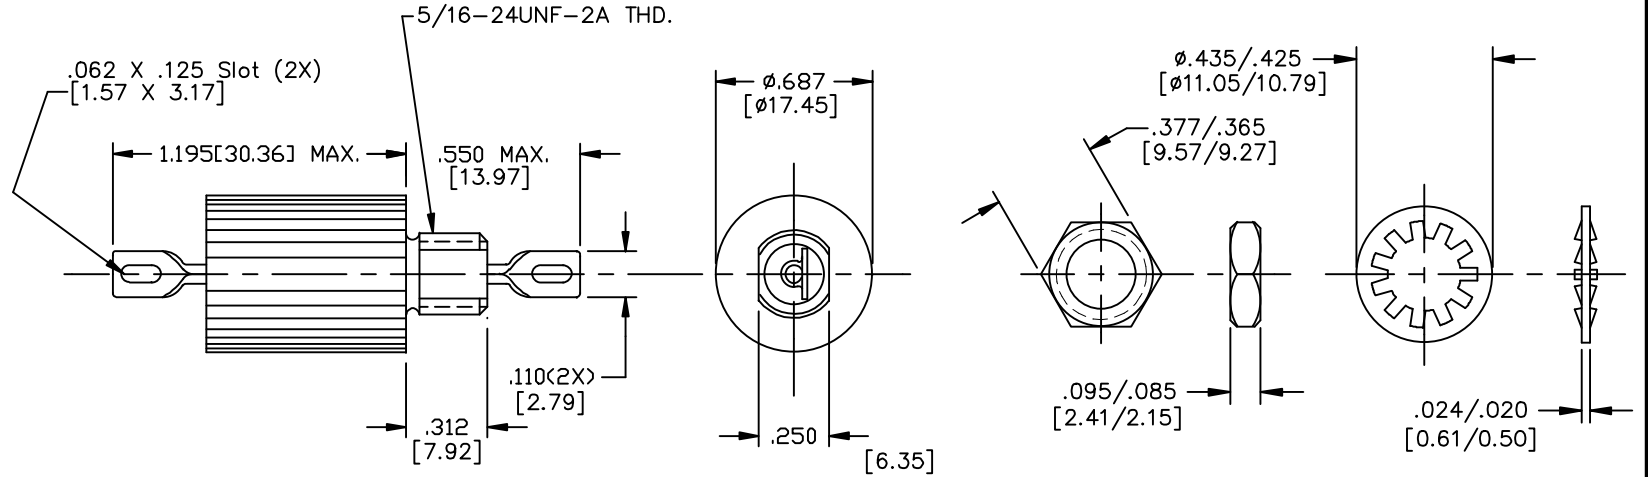

SCHEMATIC

MTG. HARDWARE

NOTES:

1) MOUNTING TORQUE NOT TO EXCEED 7 lbs-in.

										00	REV. NO.	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. [MILLIMETERS] DO NOT SCALE.	TOLERANCES UNLESS OTHERWISE SPECIFIED Fractions ± Dec. .xx± Dec. .xxx± .010 Angles ±0° 30'	SPECTRUM CONTROL INC. Description Low Pass EMI Filter	ERIE, FAIRVIEW PENNSYLVANIA	
										CN. 27402-CPD	CHANGE NOTICE					CODE IDENT. NO. DLSP2
																Sheet 1 of 1

Quality Products From The Specialists In Electro-Magnetic Compatibility

