
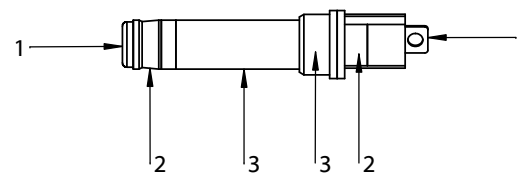


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00074	Connector, dc plug, 3.2x0.9xL20.2 mm, spring contacts, 3 conductors	1	
2	30-00006	Wire, 3C BC, 24 AWG, 300V, 80C, 3.4 mm, PVC, 76A	1	
3	24-00052	Overmold, PVC, black	1	

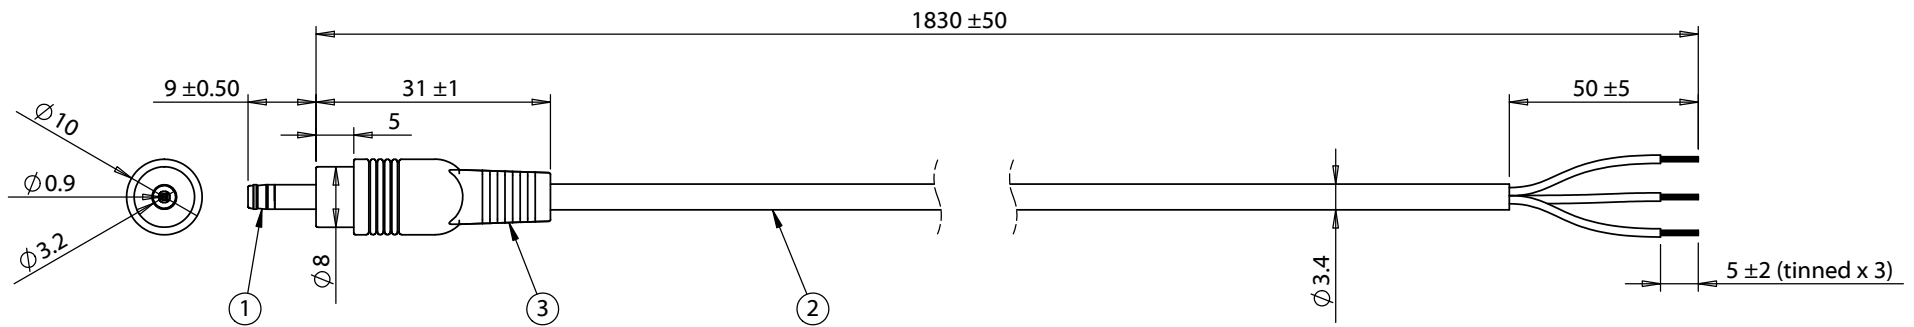

Wiring Diagram	
50-00074	wire color
1	red
2	green
3	black

Revision:	Date:	Description:	Prepared:	Notes:	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p>
A	3/29/2010	Re-issue CUI spec as Tensility	GL 2016.03.16 16:34:27 -07'00"	RoHS compliant	
A1	5/5/2010	Included plug and wiring detail	Verified: LA	Function test: no open, no short circuit, no intermittent	
A2	8/31/2011	Updated description, connector, and wire information	Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description: Cable, 1830 mm, 3.2x0.9x9.0 mm, 3 conductor 50-00074 plug to stripped tinned, 24 AWG, 30-00006 wire	
				Size:	Part number:
				A	053-0445R (CA-2221)
				Scale: 1:1	Sheet 1 of 1