

10x3.2x0.5 ISM 868 MHz Chip Antenna (AA067)

Engineering Specification

1. Explanation of Product Number

H 2 U 6 4 6 M T N W 0 1 0 0



2. Features

- *Stable and reliable in performances
- *Low temperature coefficient of frequency
- *Low profile, compact size
- *RoHS 2.0 compliance
- *SMT processes compatible

3. Applications

- *ISM Band system.
- *RFID system

4. Description

Unictron's chip antenna series are specially designed for ISM Band applications. Based on Unictron's proprietary design and processes, this chip antenna has excellent stability and sensitivity to consistently provide high signal reception efficiency.



詠業科技股份有限公司
Unictron Technologies Corporation
Website: www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : **Mina** Designed by : **Ken** Checked by : **Mike** Approved by : **Herbert** UNIT : **mm**

TITLE : **ISM 868 MHz Chip Antenna (AA067)**
Engineering Specification

DOCUMENT
NO.

H2U646MTNW0100

REV.
E

5. Electrical Specifications (80x40(mm) ground plane)

5-1. Electrical Table:


Characteristics		Specifications	Unit
Outline Dimensions		10x3.2x0.5	mm
Ground Plane		80x40	mm
Working Frequency		863~870	MHz
VSWR (@ center frequency)*		2 Max.	
Characteristic Impedance		50	Ω
Polarization		Linear Polarization	
Peak Gain	(@915MHz)	0.5(typical**)	dBi
Efficiency		60(typical**)	%

*Center frequency means the frequency with the lowest value in return loss of the chip antenna on the evaluation board..


**A typical value is for reference only, not guaranteed.

5-2. Return Loss & VSWR

Return Loss (S₁₁)

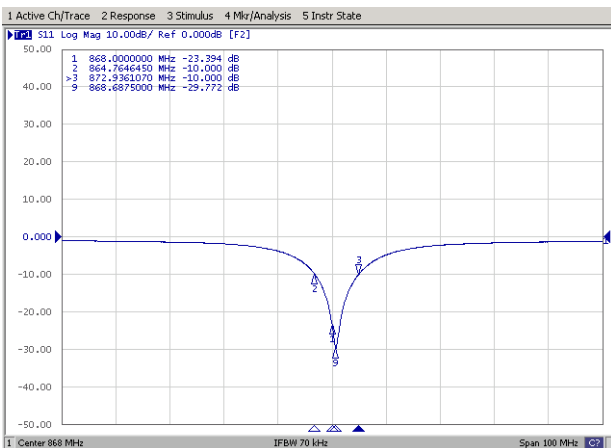

VSWR (S₁₁)

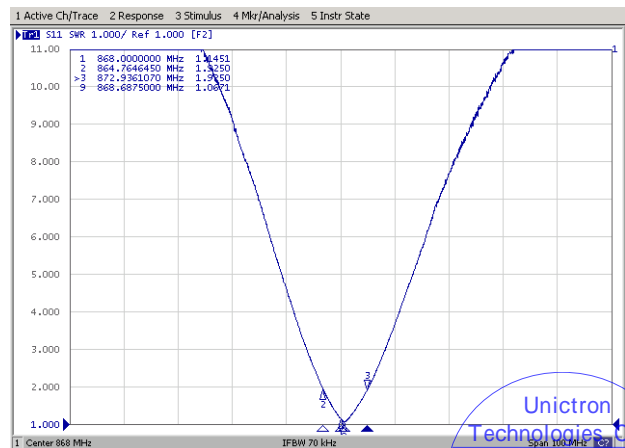

Unictron
Technologies Corp.
2019-05-21
Document
Control Center



詠業科技股份有限公司
Unictron Technologies Corporation
Website: www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : **Mina** Designed by : **Ken** Checked by : **Mike** Approved by : **Herbert** UNIT : **mm**


TITLE : **ISM 868 MHz Chip Antenna (AA067)**
Engineering Specification

DOCUMENT NO. **H2U646MTNW0100**

REV. **E**

6. Antenna Dimensions & Test Board (unit: mm)

6-1. Antenna Dimensions

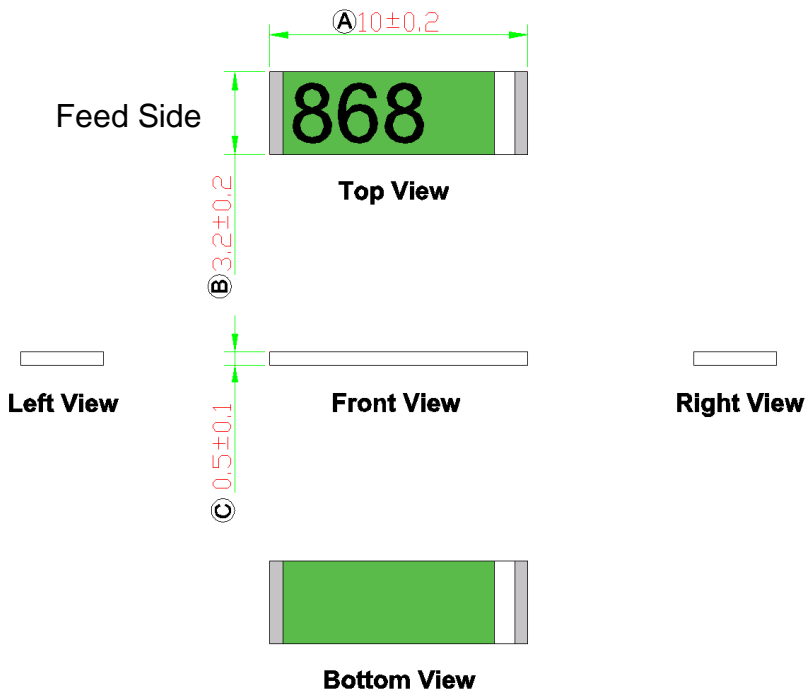

NOTE:

1. All materials are RoHS 2.0 compliant.
2. "A~C" Critical Dimensions.
3. "()" Reference Dimensions.

PIN Definitions



PIN	1	2
Soldering PAD	Signal	Tuning / Ground

Unictron
Technologies Corp.
2019-05-21
Document
Control Center




詠業科技股份有限公司
Unictron Technologies Corporation
Website: www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : **Mina** Designed by : **Ken** Checked by : **Mike** Approved by : **Herbert** UNIT : **mm**

TITLE : ISM 868 MHz Chip Antenna (AA067) Engineering Specification	DOCUMENT NO.	H2U646MTNW0100	REV.
			E

6-2. Test Board with Antenna

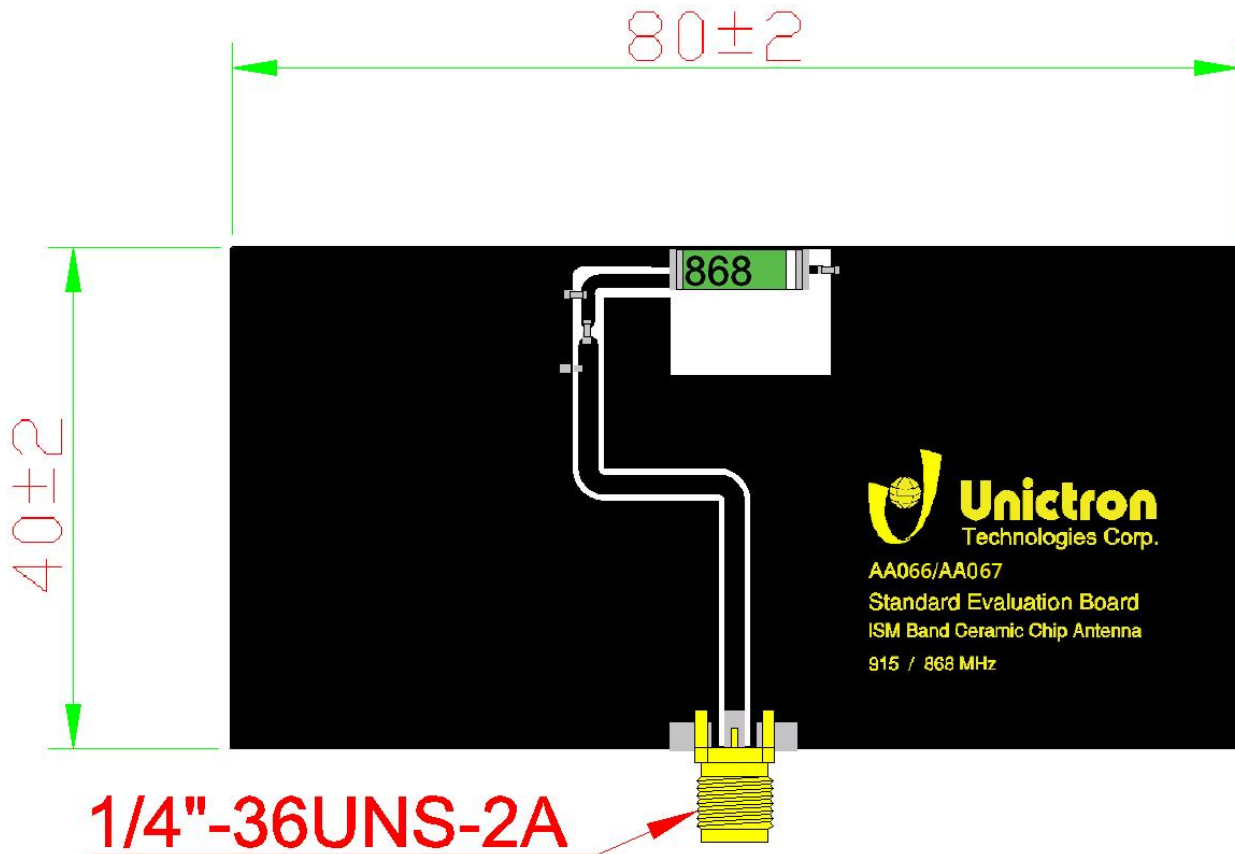

Unit : mm



詠業科技股份有限公司
Unictron Technologies Corporation
Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : **Mina** Designed by : **Ken** Checked by : **Mike** Approved by : **Herbert** UNIT : **mm**

**TITLE : ISM 868 MHz Chip Antenna (AA067)
Engineering Specification**





**DOCUMENT
NO.**

H2U646MTNW0100

**REV.
E**

7. Radiation Pattern (80x40(mm) ground plane)

7-1. 3D Gain Pattern (Radiation Pattern at 868 MHz)

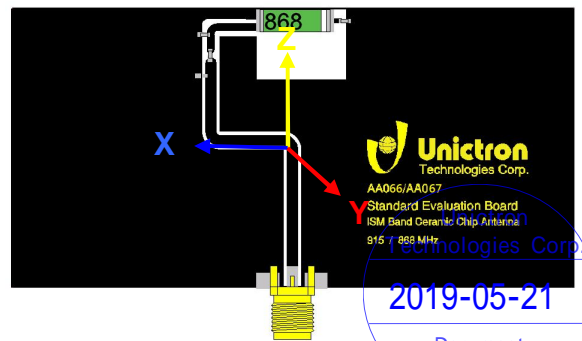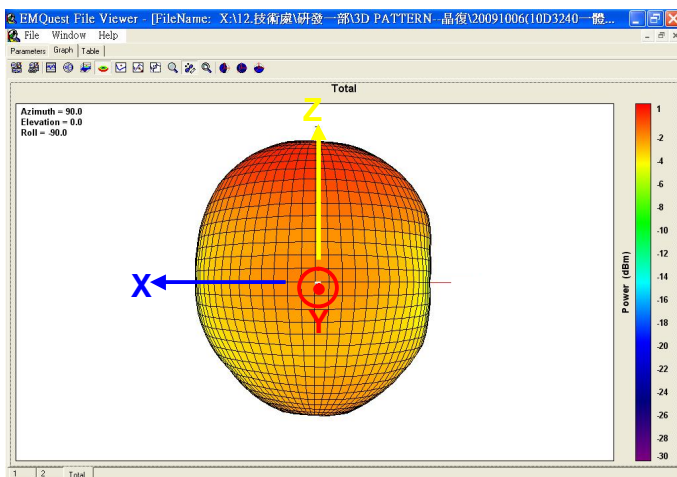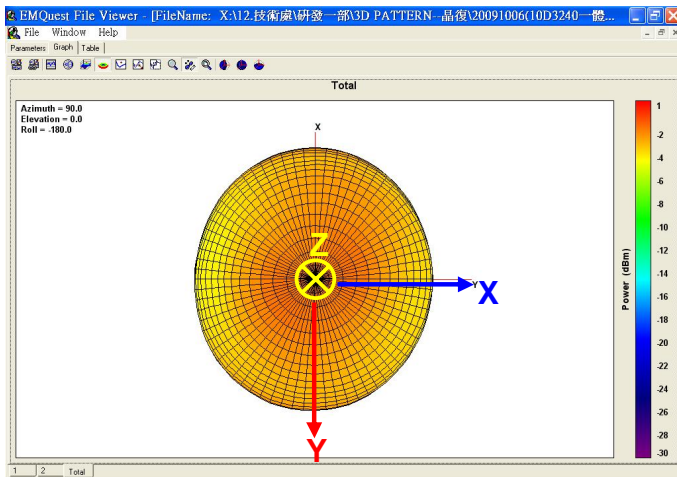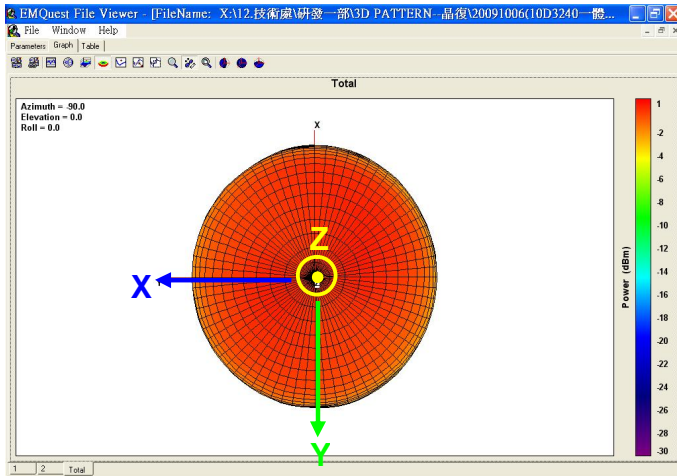

詠業科技股份有限公司
Unictron Technologies Corporation
Website: www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Mina

Designed by : Ken

Checked by : Mike

Approved by : Herbert

UNIT : mm

TITLE : ISM 868 MHz Chip Antenna (AA067)
Engineering Specification

DOCUMENT NO.

H2U646MTNW0100


REV.
E

7-2. 3D Efficiency Table

Frequency(MHz)	856	857	858	859	860	861	862	863	864	865	866	867
Efficiency (dB)	-7.46	-7.01	-6.54	-6.07	-5.59	-5.11	-4.64	-4.17	-3.71	-3.28	-2.87	-2.51
Efficiency (%)	17.95	19.92	22.19	24.73	27.61	30.81	34.35	38.28	42.59	47.04	51.66	56.08
Gain (dBi)	-4.84	-4.39	-3.93	-3.43	-2.96	-2.44	-1.96	-1.47	-0.99	-0.56	-0.12	0.23

Frequency(MHz)	869	870	871	872	873	874	875	876	877	878	879	880
Efficiency (dB)	-2.00	-1.89	-1.86	-1.92	-2.07	-2.29	-2.58	-2.92	-3.31	-3.72	-4.14	-4.57
Efficiency (%)	63.04	64.64	65.20	64.23	62.08	58.99	55.19	51.00	46.68	42.47	38.55	34.93
Gain (dBi)	0.78	0.91	0.96	0.90	0.75	0.53	0.23	-0.11	-0.49	-0.90	-1.34	-1.78

7-3. 3D Efficiency vs. Frequency

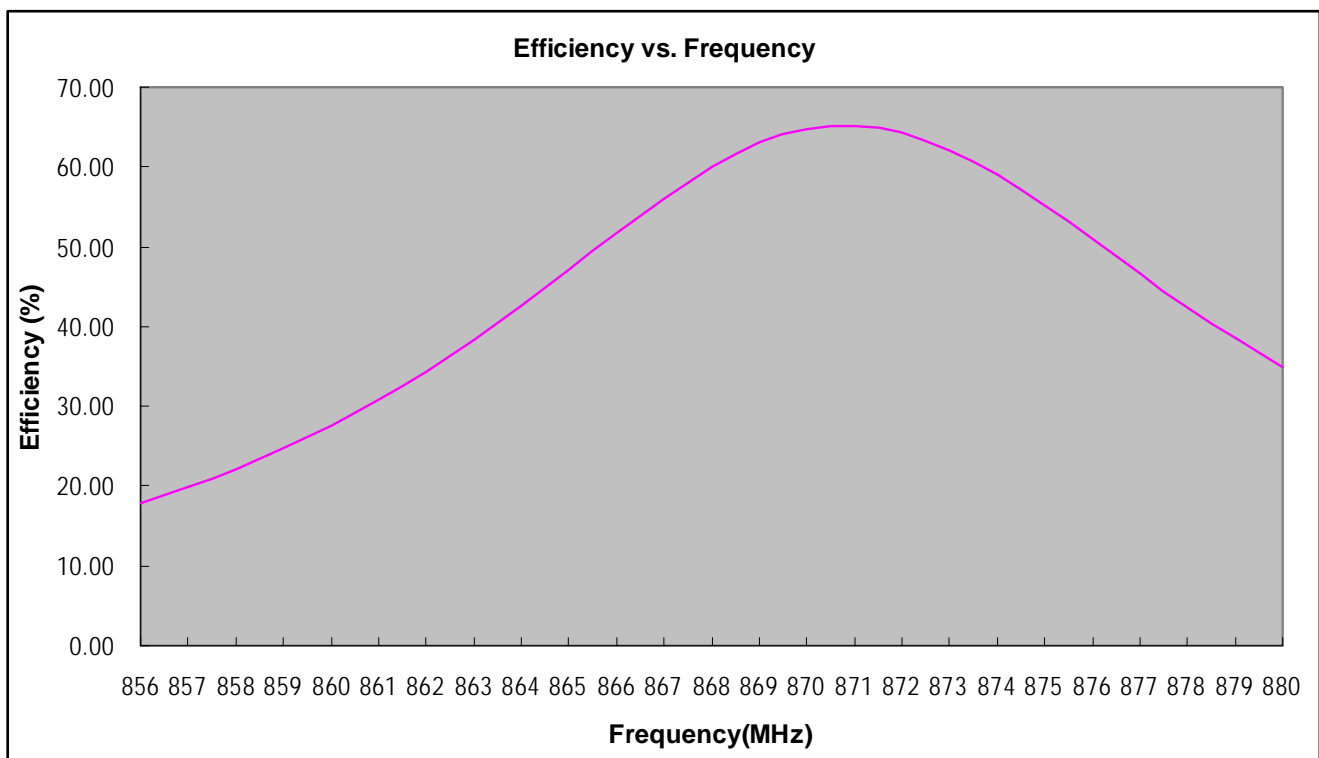

詠業科技股份有限公司
Unictron Technologies Corporation
Website: www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : **Mina** Designed by : **Ken** Checked by : **Mike** Approved by : **Herbert** UNIT : **mm**

TITLE : **ISM 868 MHz Chip Antenna (AA067)**
Engineering Specification

DOCUMENT NO.


H2U646MTNW0100

REV.
E

8. Layout Guide:


a. Solder Land Pattern:

Land pattern for soldering (black marking areas) is as shown below. Matching circuit is needed for good performance, when customer's device is different.

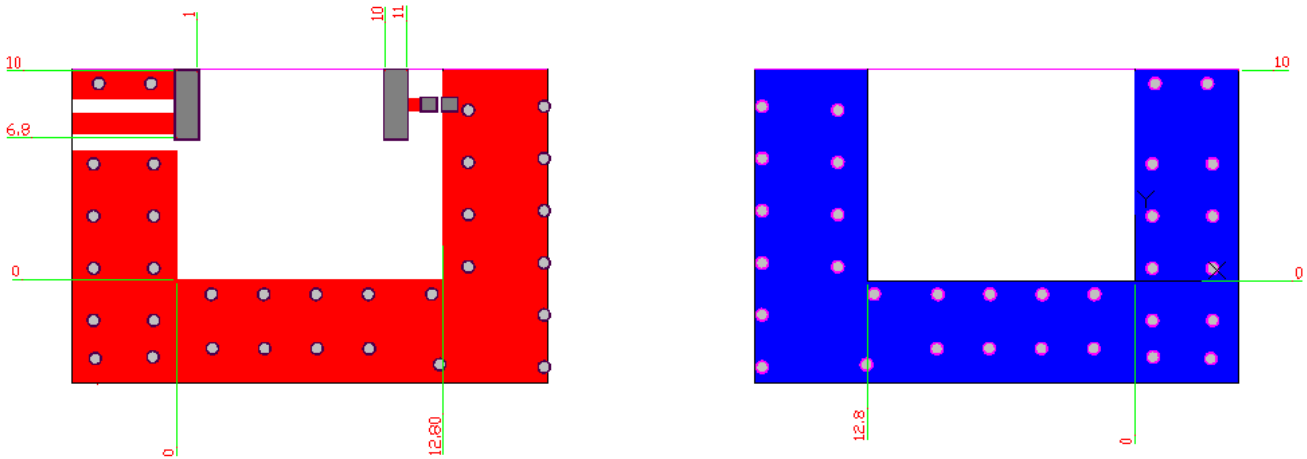

b. Matching circuit :

(Center frequency is about 915 MHz @ 80 x 40 mm² Evaluation Board)

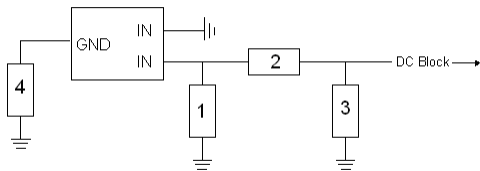

System Matching Circuit Component			
Location	Description	Vendor	Tolerance
1	N/A*	-	-
2	0Ω*	(0402)	-
3	5.0pF*	Murata (0402)	±0.05 pF
4	12pF*	Murata (0402)	±5 %

*Typical reference values which may need to be changed when circuit boards or part vendors are different.



詠業科技股份有限公司
Unictron Technologies Corporation
Website: www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : **Mina**

Designed by : **Ken**

Checked by : **Mike**

Approved by : **Herbert**

UNIT : **mm**

TITLE : **ISM 868 MHz Chip Antenna (AA067)
Engineering Specification**

DOCUMENT
NO.


H2U646MTNW0100

REV.

E

9. Soldering Conditions:

a. Typical Soldering Profile for Lead-free Process

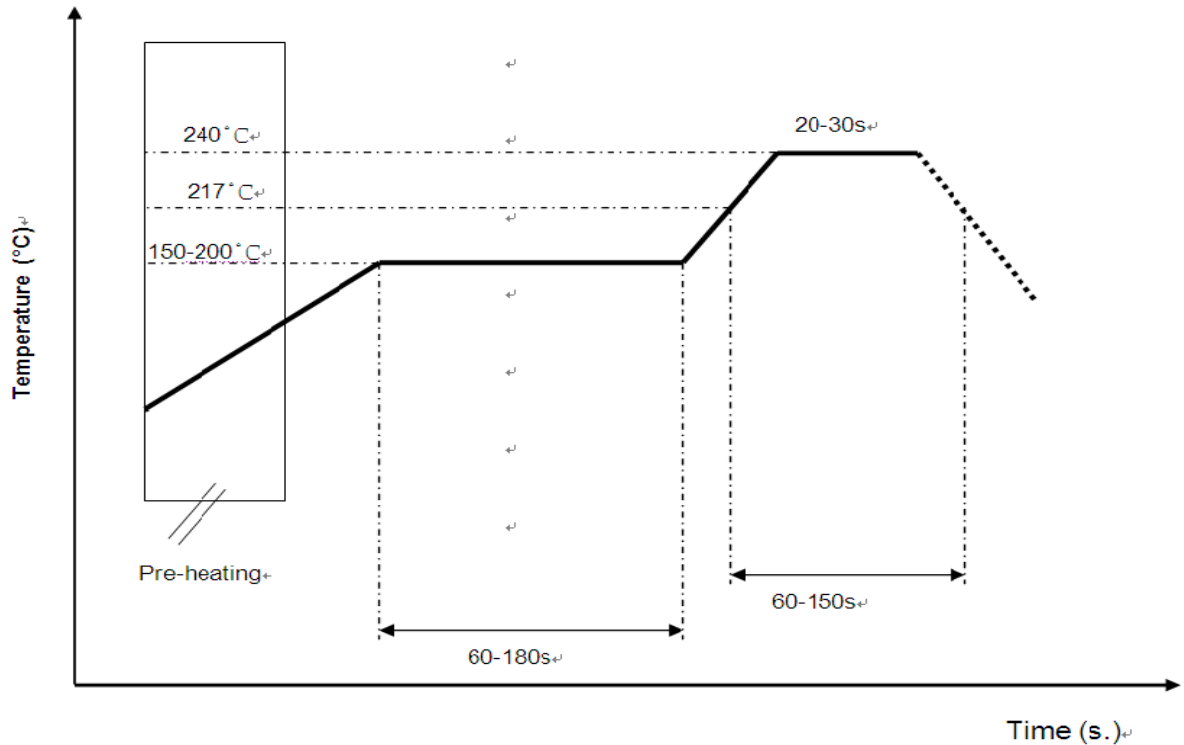

*Recommended solder paste alloy: SAC305 (Sn96.5 /Ag3 /Cu0.5) Lead Free solder paste.

10. Reminders for users of Unictron's chip antennas

- Since Unictron's chip antennas are made of ceramic materials which show different rigidity than circuit board materials, bending of circuit board at the locations where chip antennas are mounted may cause the cracking of solder joints or antenna itself.
- Any connecting strip which will be cut off at PCB assembly process shall be located away from the installation site of chip antenna. Punching of the connecting strip may cause severe bending of the circuit board and cracking of solder joint or chip antenna itself may occur.
- Be cautious when ultrasonic welding process needs to be used near the locations where chip antennas are installed. Strong ultrasonic vibration may cause the cracking of chip antenna solder joints.



詠業科技股份有限公司
Unictron Technologies Corporation
Website: www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION


Prepared by : Mina	Designed by : Ken	Checked by : Mike	Approved by : Herbert	UNIT : mm
TITLE : ISM 868 MHz Chip Antenna (AA067) Engineering Specification		DOCUMENT NO.	H2U646MTNW0100	REV. E

11. Packing:

(1) Quantity/Reel: 6000pcs/Reel

(2) Plastic tape:

a. Tape Drawing

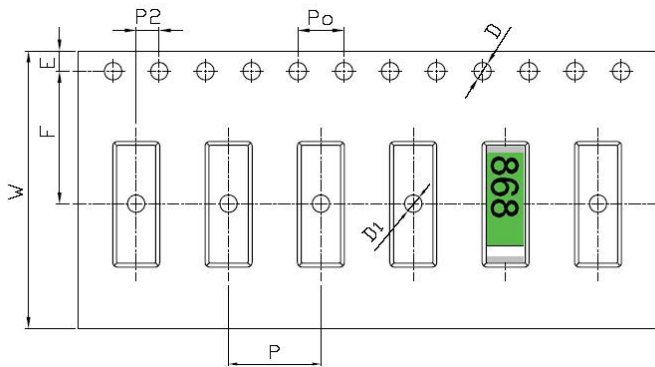

b. Tape Dimensions (unit: mm)

Feature	Specifications	Tolerances
W	24.00	±0.30
P	8.00	±0.10
E	1.75	±0.10
F	11.50	±0.10
P2	2.00	±0.10
D	1.50	+0.10 0.00
D1	1.50	±0.10
Po	4.00	±0.10
10Po	40.00	±0.20

12. Operating & Storage Conditions

12-1. Operating

- (1) Maximum Input Power: 2 W
- (2) Operating Temperature: -40°C to 85°C
- (3) Relative Humidity: 10% to 70%

12-2. Storage (sealed)

- (1) Storage Temperature: -5°C to 40°C
- (2) Relative Humidity: 20% to 70%
- (3) Shelf Life: 1 year

12-3. Storage (unsealed)

Meet the criteria of J-STD-033 MSL2a

12-4. Storage (After mounted on customer's PCB with SMT process)

- (1) Storage Temperature: -40°C to 85°C
- (2) Relative Humidity: 10% to 70%



詠業科技股份有限公司
Unictron Technologies Corporation
Website: www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Mina

Designed by : Ken

Checked by : Mike

Approved by : Herbert

UNIT : mm

TITLE : ISM 868 MHz Chip Antenna (AA067)
Engineering Specification

DOCUMENT
NO.

H2U646MTNW0100

REV.

E

13. Notice

(1) Installation Guide:

Please refer to Unictron’s application note “General guidelines for the installation of Unictron’s chip antennas” for further information.

(2) All specifications are subject to change without notice.



詠業科技股份有限公司
 Unictron Technologies Corporation
 Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Mina	Designed by : Ken	Checked by : Mike	Approved by : Herbert	UNIT : mm
TITLE : ISM 868 MHz Chip Antenna (AA067) Engineering Specification		DOCUMENT NO.	H2U646MTNW0100	REV. E