

Telecommand radio module

NK-2.4Y 2.4 GHz

NK-2.4Y is an embedded input/output module which operates in 2.4 GHz band. In spite of small size and low power consumption, it achieves the communication range of 100 m (line of sight).

Our original frequency hopping protocol allows multiple modules to be used in one area simultaneously without concern about radio channels. With a fast input-output response time of 20 ms, a maximum of 8 switch inputs/outputs can be transmitted. Regarding an antenna, customers can select either internal PCB antenna or external antenna specified by Circuit Design.


Link signal output shows connection status, which help the user to stay within the signal coverage area.

Features

- Module can be set to either input or output mode.
- CRC-16 Error Detection
- Achieves a Hamming distance of 6 to minimize malfunction
- Transmission of max 8 switching signals by connecting simple external circuitry
- Communication LOS: 100 m
- Low current consumption
- Rapid two way communication for confirmation of communication link status.
- 1:1 communication only
- Frequency hopping allows multiple systems in one area without concern about channel management
- FCC Part 15 / ISCED RSS-247 / ARIB-STD-T66 / RED EN 300 440

Applications

- Remote Tail lifts on trucks, Remote control of care lifts on welfare vehicles
Shutter open and close

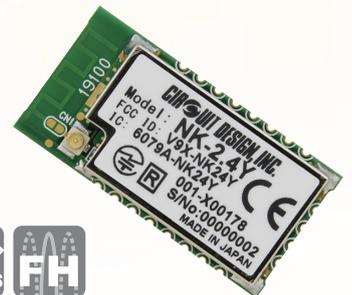

Radio Part

Parameter	Specification	Remarks
Applicable standard	FCC Part 15 / ISCED RSS-247 ARIB STD-T66 / EN 300 440	
Communication method	Simplex	Two-way between paired modules
Communication range	100 m	Line of sight
Communication mode	1:1	(Input mode: Output mode)
Frequency range	2403 to 2479 MHz	Frequency Hopping
Operating temperature	-30 to +65 C	
Antenna	Internal pattern antenna or specified external antennas	
Supply Voltage	2.2 to 5.5 V	
Input / Output response	30 to 60 ms	
Communication bitrate	250 kbps	
Weight	3.2 g	
Dimensions	35.3 x 17.8 x 3.5 mm	
Soldering Conditions	Hand Soldering	Soldering iron temp: 350 C within 3 sec

NK-2.4Y (Input mode)

Parameter	Specification	Remarks
RF output power	1.4 mW	(+20%, -80%)
Supply Current	Typ. 3 mA ave.	
Inputs	8 Switch inputs	
Input voltage range	-0.3 V to REG + 0.3 V	REG = Internal voltage 2.058 to 2.142 V
Input voltage threshold	Low Level: 0.4 V (max) High Level: 1.7 V (min)	
Hamming Distance	6	

NK-2.4Y (Output mode)

Parameter	Specification	Remarks
Supply Current	When linked: Typ. 7 mA ave. During linking: Typ. 14 mA ave.	
Outputs	8 switch outputs	
Output voltage range	0.3 V to REG + 0.3 V	REG = Internal voltage 2.058 to 2.142 V
Output voltage threshold	Low Level: 0.9 V (max) High Level: 1.1 V (min)	
Output holding time when communication shutoff	400 ms typ.	

Specifications are subject to change without prior notice