
OA406 Fan Tray



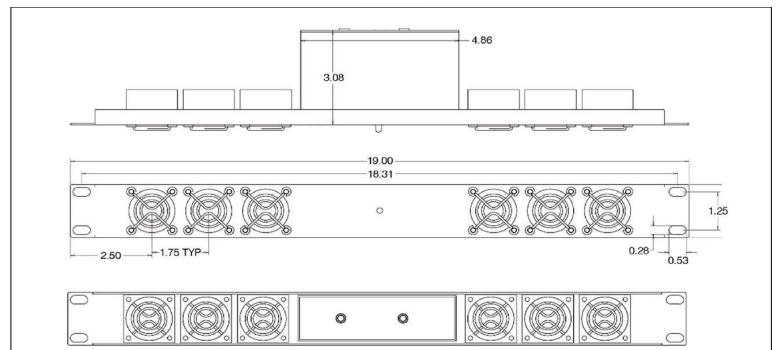

Switching AC/DC Adaptor	12V	Operating Temperature -10C ~ +50C, 20 - 90% RH
Output Power	60 W (Max load 5 A)	<u>Storage Temperature</u> -40 ∼ +85C, 10 - 95% RH

Description	 Universal 90-264VAC Input external power supply 1U high, panel mount configuration Either N. American NEMA 5-15P or IEC320-C14 connection High Airflow of 160CFM provided by 6x Orion OD4028-12HBXC Bi-color LED alarm indicator lamp Optional redundant 2nd power supply available Redundant power switching is seamless and automatic Redundant power input may be from customers 12VDC supply Sturdy 16 Ga Powder Coated Steel Construction
-------------	--

OA406	Power Input NEMA 5-15 plug	
OA406-IEC	C14 power supply plug	
OA406-DUAL	With redundant power supply	
OA406-IEC-DUAL	With redundant power supply, international version	
OA406-PS:	Add-on power supply. Converts OA406 to DUAL	
OA406-IEC-PS	Add-on power supply. International version	









RoHS

