

P/N: QMC-CRYOATTARY-00 Thermalized Low Noise Cryogenic Thru Line Array


Features

- 8 Integrated Thru lines
- Attenuation Value: 0 dB
- Frequency: DC to 12 GHz
- Minimal change in loss with temperature
- Machined OFHC block, gold plated
- SMP/GPO connectors



Parameter	Specification	Notes
Frequency Range	DC to 12 GHz	
Attenuation @5GHz	<1.0 dB	
Insertion Loss variation with frequency	<1.0 dB	
Return Loss, all models	-15dB typ.	
Connectors	SMP/GPO (male pin)	

Measured Results, typ. (0dB Model)

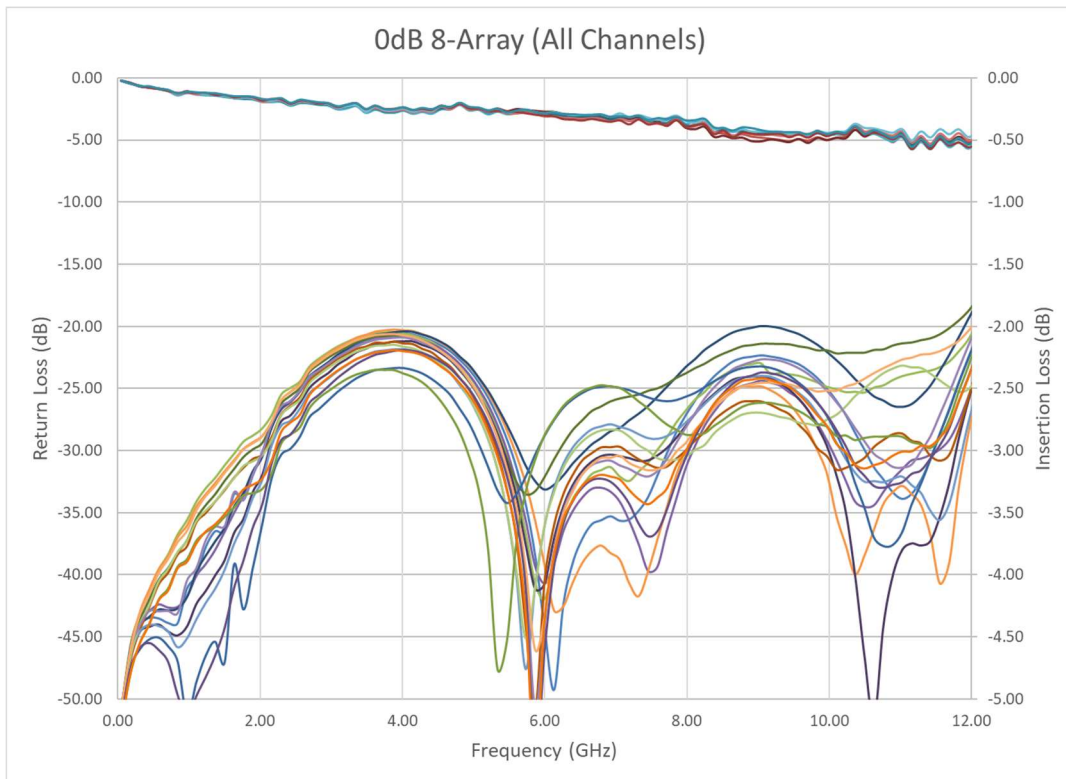

Outline Drawing inches [mm]

