

		1	
Part Number:		DRAWN	12/10/2016
TD004	1003-1	CJ	12/19/2016
IP094		CHECKED	12/10/2016
		P.D.	12/19/2016
Description:	naducar	APPROVED	12/10/2016
Piezo Tra	isaucei	J.S.	12/19/2016

This document contains data proprietary to DB Unlimited. Any use or reproduction, in any form, without prior written permission of DB Unlimited is prohibited. All terms and conditions can be found at www.dbunlimitedco.com


Top View

Sound Emission Hole 9.00


0.2

Weight

Side View

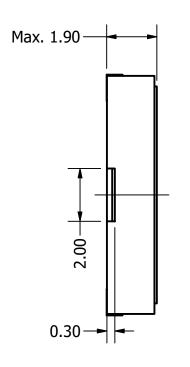

Bottom View

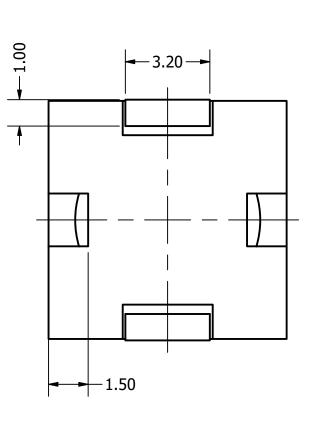

4) Subject to change or redrawn without notice

Items	Specifications	Conditions					
Sound Pressure Level	70	dB (@ 10cm)					
Resonant Frequency	4,000	Hz					
Rated Voltage	3	V	REVISION HISTORY				
Voltage Range	1 ~ 25	V	REV	DESCRIPTION	DATE	APPROVED	
Capacitance	12,000	pF		Released from Engineering	3/31/2014	J.S.	
Max. Rated Current	3	mA	1	Updated to new template	12/19/2016	J.S.	
Storage Temperature	-40 ~ +85	°C	2	Updated specs and sound emission hole description	4/2/2020	J.S.	
Operating Temperature	-40 ~ +85	°C	NOTES				
Connection Method	Surface Pads	1) All dimensions are in mm unless otherwise noted					
Mount Type	Surface Mount	2) All tolerances are \pm 0.5 mm unless otherwise noted					
Housing Material	LCP	3) All parts meet RoHS					

3 **4** 2