


		1		
Part Number:		DRAWN	E /2 /2010	
TD12/	1005 3	CJ 5/2/2019		
1712	1005-2	CHECKED	5/3/2019	
		C.H.	3/3/2019	
Description:	ranaducar	APPROVED	E/2/2010	
Plezo II	ransducer	C.E.	5/3/2019	


This document contains data proprietary to DB Unlimited. Any use or reproduction, in any form, without prior written permission of DB Unlimited is prohibited. All terms and conditions can be found at www.dbunlimitedco.com


Top View

Side View

Bottom View

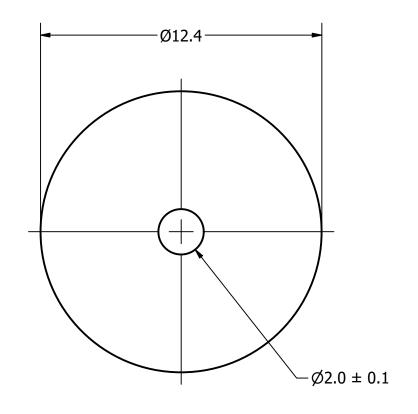

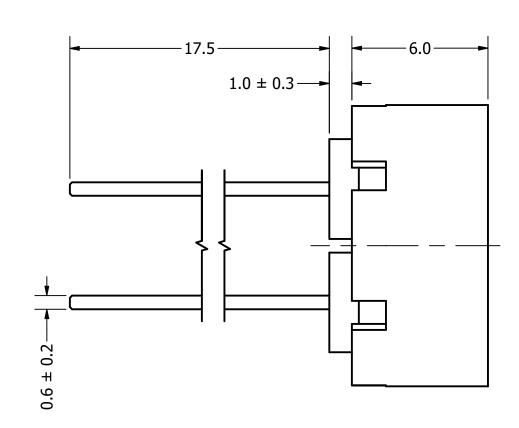

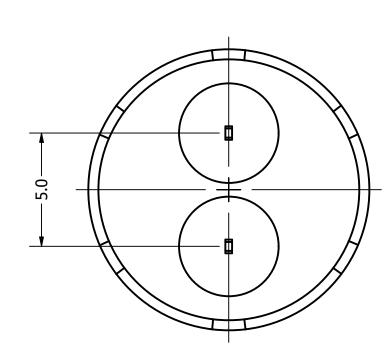

Items	Specifications	Conditions						
Min. Sound Pressure Level	80	dB (@ 10cm)						
Resonant Frequency	2,000	Hz						
Rated Voltage	5	V						
Voltage Range	1 ~ 30	V		REVISION HISTORY				
Capacitance	8,000	pF	REV	DESCRIPTION	DATE	APPROVED		
Max. Rated Current	10	mA		Released from Engineering	10/21/2013	J.S.		
Storage Temperature	-30 ~ +80	°С	1	Updated drawing template, diameter, SPL, max current, weight, temp	5/3/2019	C.E.		
Operating Temperature	-20 ~ +70	°C		NOTES				
Connection Method	PC Pins			1) All dimensions are in mm unless otherwise noted				
Mount Type	Thru Hole			2) All tolerances are ± 0.5 mm unless otherwise noted				
Housing Material	РВТ			3) All parts meet RoHS				
Weight	2.5	g		4) Subject to change or redrawn without notice				