


			1	
Part	Part Number:		DRAWN	F/16/2016
	TD202	400 1	CJ 5/16/2016 CHECKED 5/18/2016 P.D.	
	TP293	409-1	CHECKED	5/19/2016
			P.D.	3/18/2010
Desc	ription: Piezo Trai	acducar	APPROVED	F/19/2016
	PIEZU ITAI	ansuucei	J.S.	5/18/2016

This document contains data proprietary to DB Unlimited. Any use or reproduction, in any form, without prior written permission of DB Unlimited is prohibited. All terms and conditions can be found at www.dbunlimitedco.com

## Top View

Mount Type


Housing Material

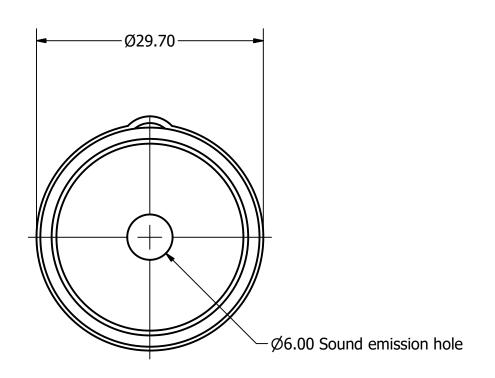


Flush Mount

ABS

## Side View

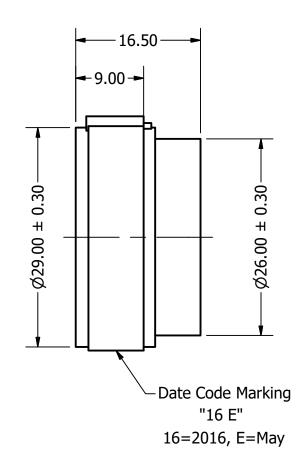

## **Bottom View**

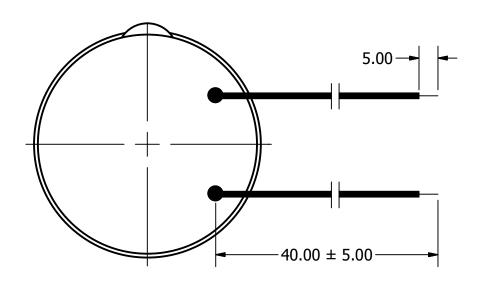

3) All parts meet RoHS

4) Subject to change or redrawn without notice

Items	Specifications	Conditions					
Sound Pressure Level	109	dB (@ 10cm)					
Resonant Frequency	3,400	Hz	REVISION HISTORY				
Rated Voltage	9	V	REV	DESCRIPTION	DATE	APPROVED	
Voltage Range	9 ~ 28	V		Released from Engineering	10/21/2013	J.S.	
Capacitance	25,000	pF (@ 120 Hz)	1	Updated to new template	5/18/2016	J.S.	
Max. Rated Current	180	mA	2	Corrected SPL	5/18/2017	C.E.	
Storage Temperature	-30 ~ +70	°C	NOTES				
Operating Temperature	-20 ~ +60	°C	1) All dimensions are in mm unless otherwise noted				
Connection Method	Lead Wires		2) All tolerances are ± 0.5 mm unless otherwise noted				

 Weight
 8
 g

 4
 3
 4
 2