


CFP MSA compliant CFP2 Connector & Mechanical unit

◇Feature


- CFP MSA compliant
- Transmission characteristics :
25Gbps/ch , 4ch=100Gbps/connector
10Gbps/ch , 10ch=100Gbps/connector
- Available dual slot/single slot mechanical unit
- Available test fixture board for host board and module(25Gbps×4ch)
CEI-28G-VSR compliant

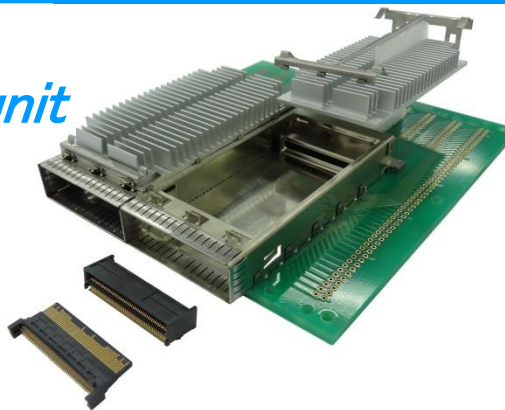

◇Specification

	Specification
Current rating	DC1.25A / Line
Voltage rating	31.5V AC Max/Contact
Insulation resistance	1GΩ min
Withstanding voltage	AC300V 1min
Contact resistance	R 10mΩ Max
Operating temperature	-55°C ~ +85°C
Durability	200cycles

◇Test fixture

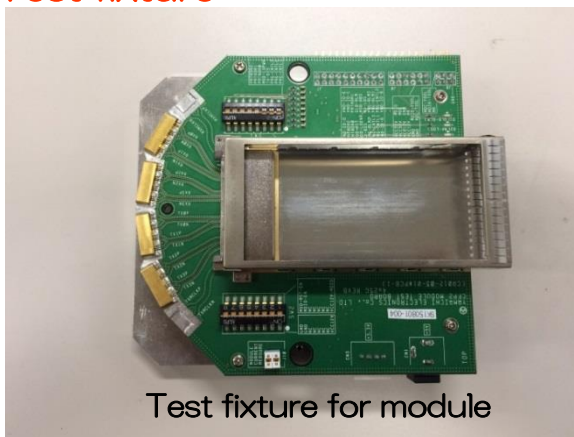

Test fixture for module

◇Composition (Yamaichi standard)

