SkyHigh SLC NAND FLASH MEMORY





INTRODUCTION

SkyHigh Memory's highly reliable SLC NAND products offer a high-density solution optimized for embedded systems. SkyHigh Memory products include differentiated features such as operating temperature support up to 105°C, AEC-Q100 qualification for automotive applications and packages as small as 52mm². All of SkyHigh Memory's SLC NAND products are backed by SkyHigh Memory's world-class customer support and commitment of supply longevity. For applications where security is a priority, SkyHigh Memory offers the SL-2 SecureNAND™ and ML-3 product family which provides enhanced protection features.


FEATURED PRODUCT FAMILIIES


ML-1/MS-1	ML-2/MS-2	ML-3	SL-2
Densities: 1Gb to 8Gb	Densities: 1Gb to 16Gb	Densities: 4Gb to 16Gb	Densities: 1Gb to 4Gb
Voltages: 3V and 1.8V options	Voltages: 3V and 1.8V options	Voltages: 3V	Voltages: 3V
Reliability: 100,000 P/E Cycles 10-year Data Retention	Reliability: 100,000 P/E Cycles 10-year Data Retention	Reliability: 80,000 P/E Cycles 10- year Data Retention	Reliability: 100,000 P/E Cycles 10-year Data Retention
ECC: 1-bit ECC Temperature: -40°C to +85°C -40°C to +105°C Package: 48-pin TSOP 12x20x1.2mm 63-ball BGA 9x11x1.0mm	ECC: 4-bit ECC Temperature: -40°C to +85°C -40°C to +105°C Package: 48-pin TSOP 12x20x1.2mm 63-ball BGA 9x11x1.0mm 67-ball BGA 8x6.5x1.0mm	ECC: 0-bit ECC, Support 1/4/8-bit ECC SoC Temperature: -40°C to +85°C -40°C to +105°C Package: 48-pin TSOP 12x20x1.2mm 63-ball BGA 9x11x1.0mm	ECC: 4-bit ECC Temperature: -40°C to +85°C
		Security: Enhanced Protection Features	

KEY APPLICATIONS

Automotive Instrument Clusters and Infotainment Systems | Communication Equipment | Consumer Electronics | Industrial Automation

FUNCTIONAL REPRESENTATION

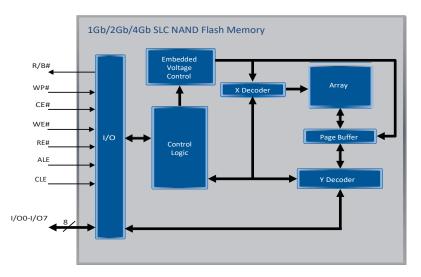

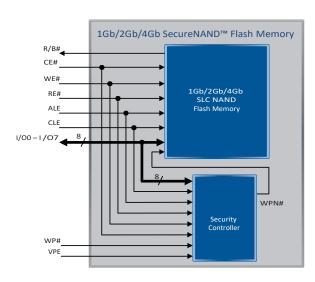

www.skyhighmemory.com

SLC NAND FLASH PORTFOLIO FEATURED PARTS

Family	Voltage	1Gb	2Gb	4Gb	8Gb	16Gb
ML-1 3.0V		\$34ML01G1	\$34ML02G1	S34ML04G1	S34ML08G1	
	3.0V	48-pin TSOP 63-ball BGA				
MS-1 1.8V		\$34M\$01G1 8V 63-ball BGA	S34MS02G1	S34MS04G1		
	1.8V			n TSOP all BGA		
ML-2 3.0V		\$34ML01G2	\$34ML02G2	\$34ML04G2	\$34ML08G2	\$34ML16G2
	3.0V	63-ba	n TSOP II BGA II BGA		48-pin TSOP 63-ball BGA	
MS-2 1.8V		S34MS01G2	S34MS02G2	S34MS04G2	S34MS08G2	S34MS16G2
	48-pin TSOP 63-ball BGA 67-ball BGA		48-pin TSOP 63-ball BGA	63-ball BGA		
ML-3 3.0V				S34ML04G3	S34ML08G3	S34ML16G3
	3.0V			· ·	n TSOP III BGA	48-pin TSOP
SL-2	3.0V	\$34\$L01G2	\$34\$L02G2	S34SL04G2		
			63-ball BGA	1		

This table is only a summary. To view SkyHigh's entire NAND Flash Memory portfolio, please visit:

http://www.skyhighmemory.com

