
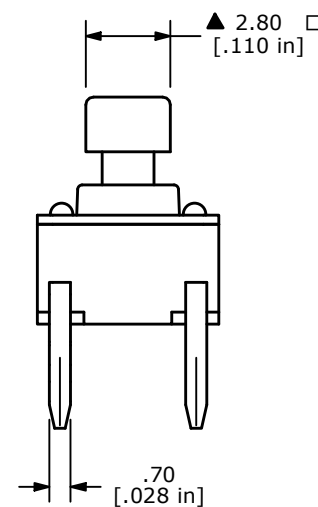


CIRCUIT: SPST ▲

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. TERMINAL NUMBERS FOR REF. ONLY
3. TOLERANCE: X.X=±0.4
X.XX=±0.25
- ▲ 4. CONTACT MATERIAL: SILVER
5. RATING: 12VDC @ 50mA
6. TRAVEL: 0.25mm +0.2/-0.1mm
- ▲ 7. OPERATING FORCE: 160±50gf
8. ELECTRICAL LIFE: 100,000 LIFE CYCLES
9. CONTACT RESISTANCE: 100mΩ MAX.
10. ▲ DENOTES CRITICAL PARAMETER
- ▲ 11. HOUSING AND ACTUATOR TO MEET UL-94VO STANDARD
12. PACKAGING: 750PCS/POLY BAG
13. OPERATING TEMP: -40°C TO 85°C

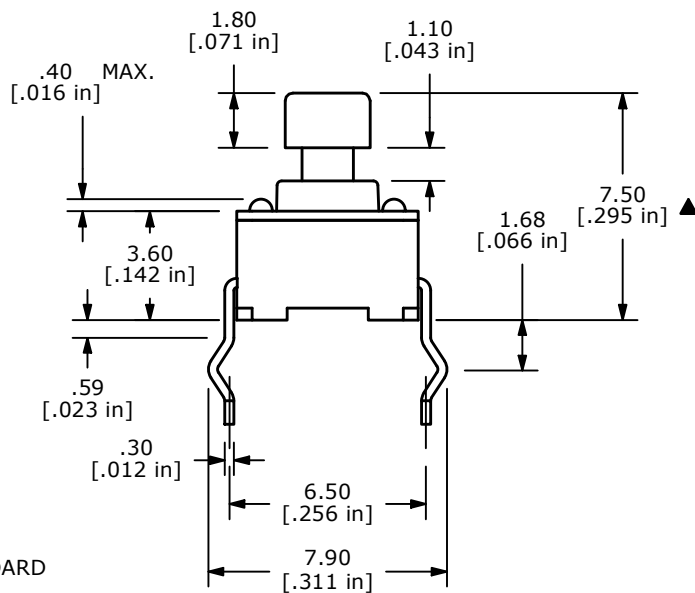

B	24547	CHANGE OPERATING TEMPERATURE	10/6/20	JM
A	16181	NEW PART RELEASE	7/7/06	CT
REV	PCR NO	DESCRIPTION	DATE	BY

E-SWITCH®				
TITLE TL1105SPF160Q94VO				
SCALE	DATE	DR	DWG	REV
4:1	7/7/2006	CT	P010213	B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED