
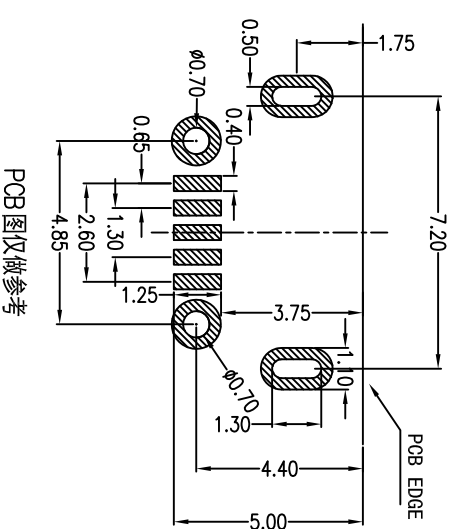

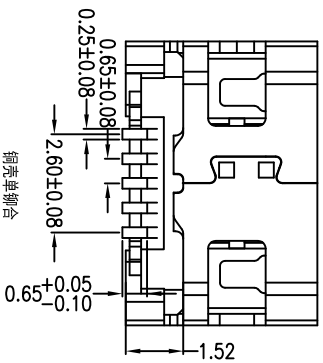


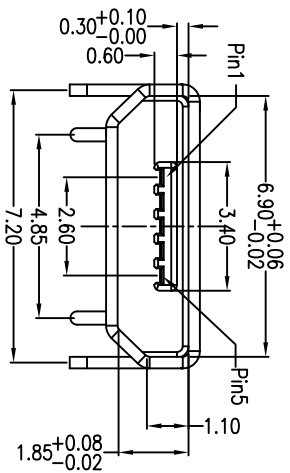
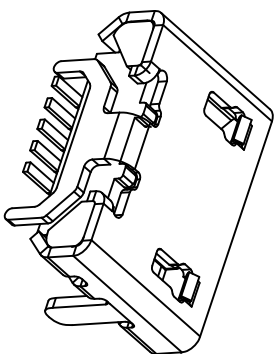


MAPX	MODIFICATION	DATE
------	--------------	------

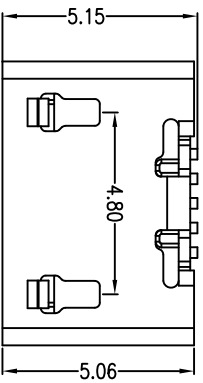

- Note:
- 1.Material:
- 1.1 Housing: High temperature thermoplastic with g.f,UL94V-0
 - 1.2 Contact: copper alloy,t=0.15mm
 - 1.3 Shell: copper alloy,t=0.30mm
- 2.Specification:
- 2.1 Current rating:1.5PIN 1.8A Max/2,3,4PIN 1A Max.
 - 2.2 Dielectric withstanding voltage: 100 V(ac) for 1 min.
 - 2.3 Contact resistance: 30 mΩ Max.
 - 2.4 Insulation resistance: 100 MΩ Min.
 - 2.5 Total mating force: 3.57 Kgf Max.
 - 2.6 Total unmating force: 1.0 Kgf Min.
 - 2.7 Temperature range: -30°C~80°C

产品图
PRODUCT CHART DWG

深圳市精拓金电子有限公司

公差一览表 TOLERANCE UNLESS OTHERWISE		单位 UNITS	制图 DRAWING	制料号 PRODUCT PWT NO
X	±0.35	X	MM	Gavin
X	±0.30	X	比例 SCALE	审核 CHKD
XX	±0.20	XX	日期 DATE	郭治富
XXX	±0.10	XXX	2016-09-09	核推 APPD
				黄国荣
				产品名称 PRODUCT ND
				MRCO USB 5S B TYPE
				四脚全插(牛角型)短针无单位
				角法 VIEW
				版本 VER
				AD