



LONG LATCH



SHORT LATCH

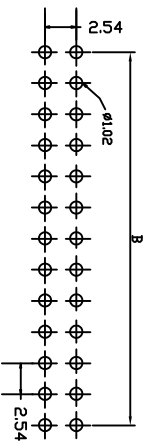

PCB LAYOUT

**SPECIFICATIONS:**  
 Current Rating: 3AMP  
 Insulator Resistance: 1000Megohms min  
 Voltage Rating: AC 500V  
 Operating Temperature: -40° ~ +85°  
 Max Processing Temp: 220° for 3~5 seconds  
 Contact Material: Brass  
 Insulator Material: PBT Black  
 Plating: Glod Flash

no. of Contacts	A	B
6P	26.82	5.08
8P	29.36	7.62
10P	31.9	10.16
12P	34.44	12.70
14P	36.98	15.24
16P	39.52	17.78
18P	42.06	20.32
20P	44.60	22.86
24P	49.68	27.94
26P	52.22	30.48
30P	57.30	35.56
34P	62.38	40.64
40P	70.00	48.26
50P	82.70	60.96
60P	95.40	73.66
64P	100.48	78.74

△ F在18P及18P以上才有

更新卡扣尺寸	19-2-20	日期	19-2-20	标志	Δ	变更内容	更新卡扣尺寸	签名	LXW	版本	A.1
编号	DWG.NO.	REV.LTR.	DATE	REV.LTR.		REVISION NOTES		SIGN		REV.	

一般公差 TOLERANCES		图号 DWG. NAME	料号 PART NO.	品名 TITLE	审核 CHECKED	比例 SCALE
X	±0.30	XGH-DWG-A3612	BH1-32XX-SBB-G0-TR	牛角2.54 2XNP 180度 L=16.0mm PC3.5	LXW	1:1
X.X	±0.25				LYYAN	MM
X.XX	±0.20					版次 REV.
X.XXX	±0.15					A.1
ANGLE	±2°	THIRD ANGLE PROJECTION:		日期 DATE	2019-02-20	图幅 SHEET
						A4

**toppt** 深圳市鑫冠辉电子有限公司