
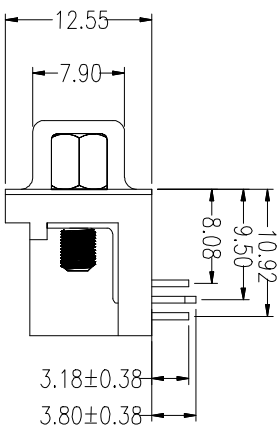
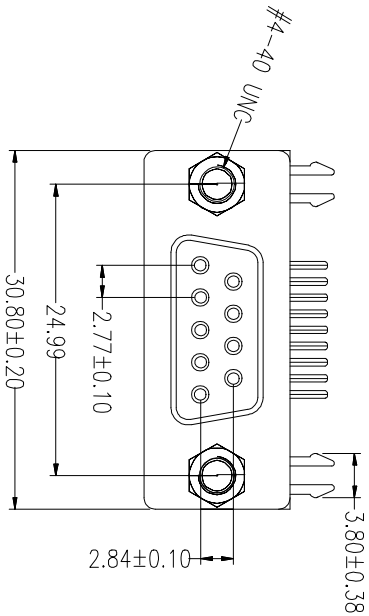
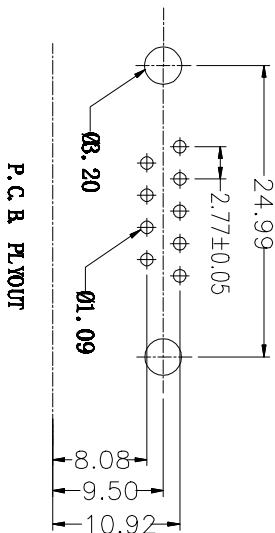


客户确认	
日期	

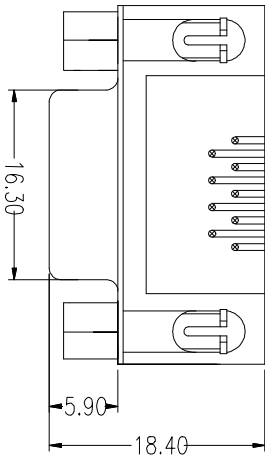

- 一、 MATERIAL:**
1. Insulator: PBT+30%Glass Fiber (UL94V-0)
 2. Contact: Brass
 3. Contact Plated: Gold Flash over Tin Or Gold Plated Or Tin Plated
 4. Shell: Steel, Nickel Plated
- 二、 SPECIFICATION:**
1. Current Rating: 5 AMPS
 2. Insulation Resistance: 5000MΩ MIN. At 500VDC
 3. Dielectric Strength: 500V for One minute
 4. Operation Temperature: -55° C~+105° C.

TOLERANCE TABLE	
.0	±0.20
.00	±0.10
.000	±0.05

APPROVED:	DATE:	TITLE:	CLIENT P/N		UNIT	SCALE	REV.
CHECKED:	DATE:	DRW:	DMR-9P 母头 叉锁 全金 黑胶		mm	Free	⊕
DATE:	DATE:	YRR	2017-12-12		FILE NO.	XPB03570003	▽
				SHEZHEN XINPENGBO ELECTRONICS CO. LTD		A	



深圳市鑫鹏博电子科技有限公司
SHEZHEN XINPENGBO ELECTRONICS CO. LTD