

Customer Information Sheet

DRAWING No.: S1751-XXR

SHEET 2 OF 2




IF IN DOUBT - ASK

©


NOT TO SCALE

THIRD ANGLE PROJECTION





ALL DIMENSIONS IN mm

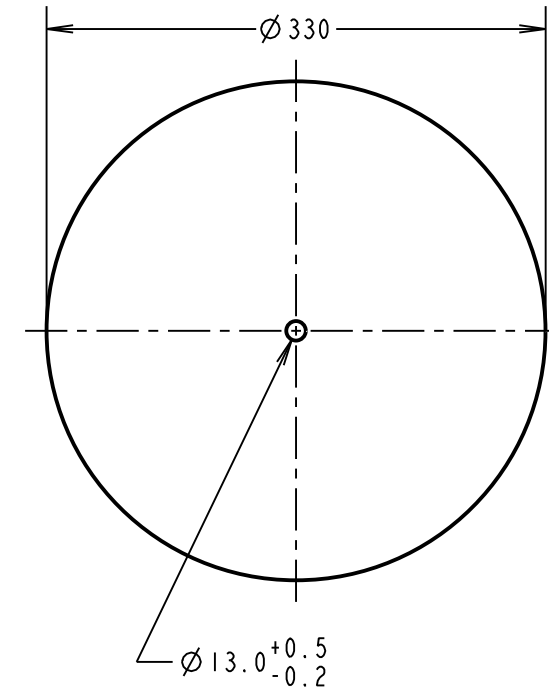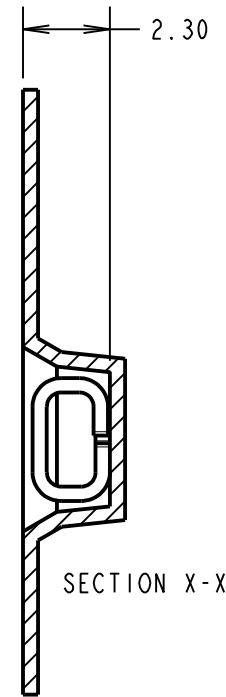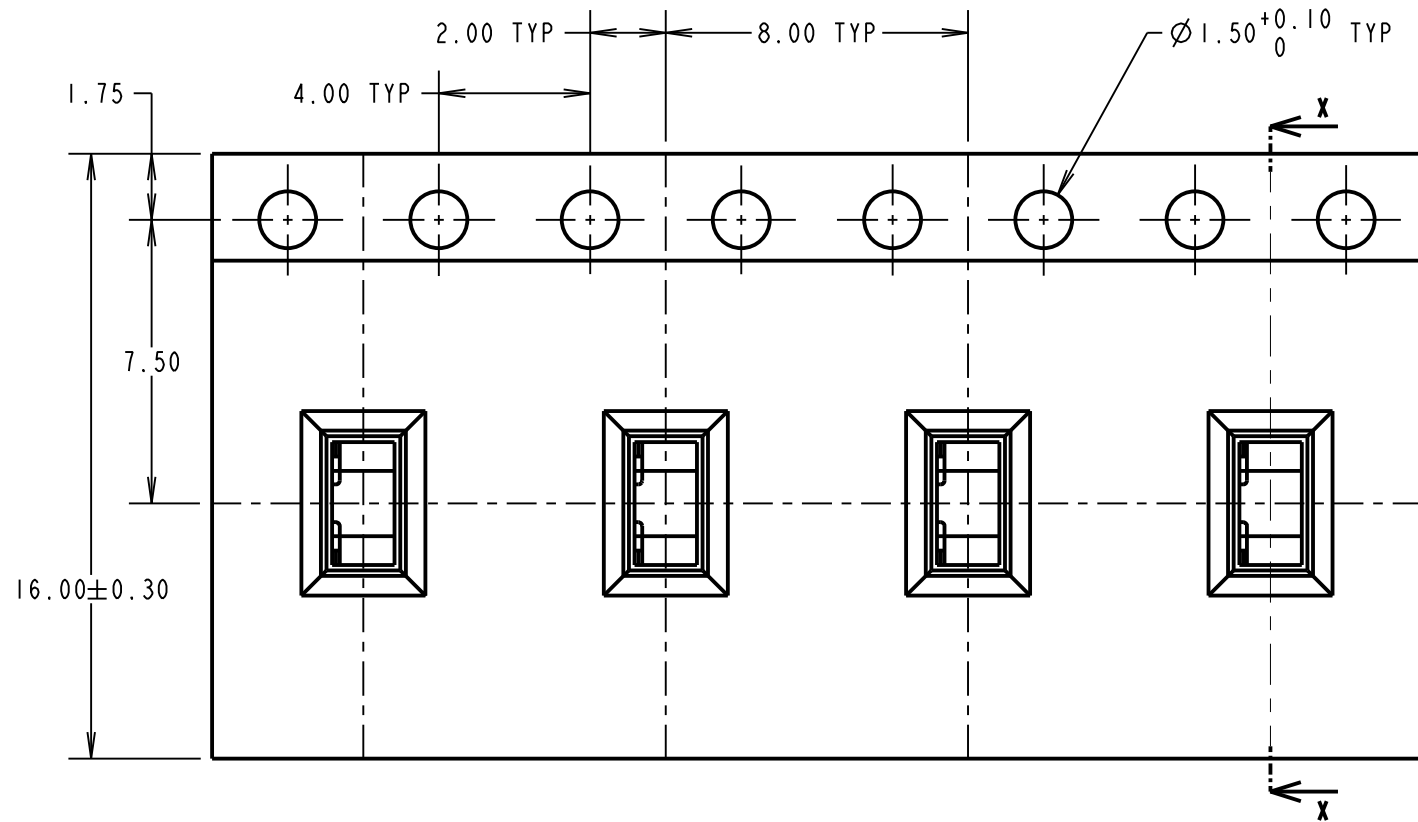



REEL DETAILS

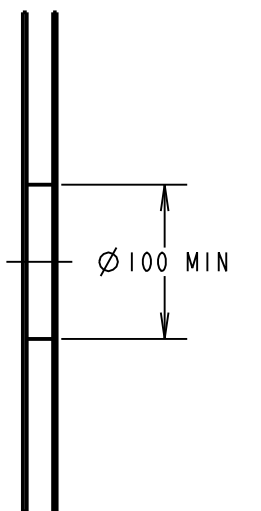

RECOMMENDED PAD LAYOUT

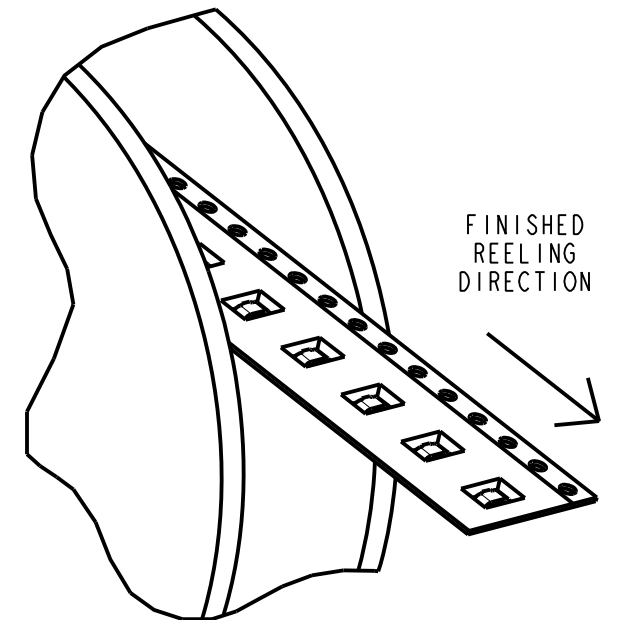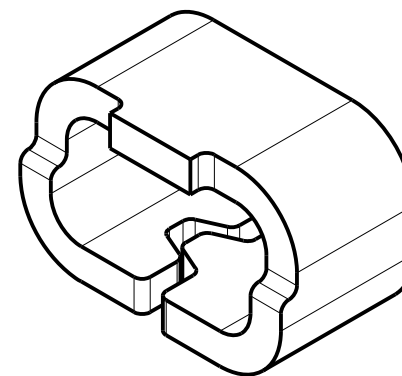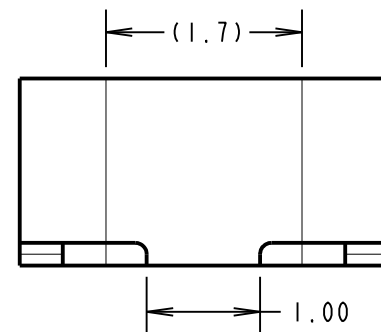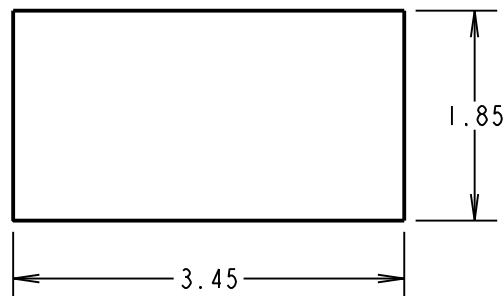

COMPONENT DETAILS

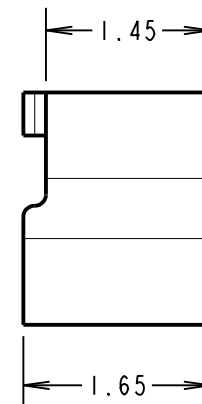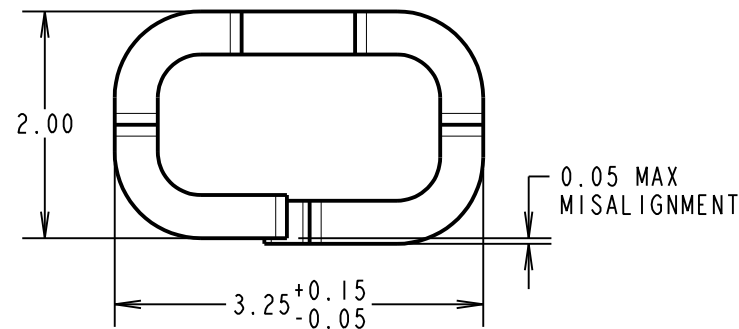

SPECIFICATIONS:
 MATERIAL = BRASS
 FINISH:
~~06 = 4µ 90/10 TIN/LEAD~~
 46 = 4µ 100% TIN
 ELECTRICAL:
 CURRENT RATING = 2A MAX
 CONTACT RESISTANCE = 20mΩ MAX
 ENVIRONMENTAL:
 OPERATING TEMPERATURE = -55°C TO +125°C

OBSOLETE

ORDER CODE	FINISH
S1751-06R	TIN/LEAD
S1751-46R	100% TIN

MSP	ISS.	DATE	C/NOTE
8		24.10.16	20136
APPROVED: M. PERREN			
CHECKED: S. BENNETT			
DRAWN: W. J. BOURNE			
CUSTOMER REF.:			
ASSEMBLY DRG:			

- NOTES:
- QUANTITY PER REEL = 2,500.
 - THIS PRODUCT IS TAPED AND REELED IN ACCORDANCE WITH EIA-481-2-A (ELECTRONIC INDUSTRIES ASSOCIATION).
 - FOR LOOSE COMPONENTS, SEE S1751-XX.

HARWIN

www.harwin.com
 technical@harwin.com

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES
 X. = ±1mm
 X.X = ±0.25mm
 X.XX = ±0.10mm
 X.XXX = ±0.01mm
 ANGLES = ±5°
 UNLESS STATED

MATERIAL:
 SEE ABOVE
 FINISH: SEE ABOVE
 S/AREA: mm²

TITLE:
 SURFACE MOUNT TEST TERMINAL
 (TAPE AND REELED)

DRAWING NUMBER:
S1751-XXR

SHT
 2 OF 2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Harwin:](#)

[S1751-06R](#) [S1751-46R](#)