

### Description

YTLD2512C is a high performance duplexer designed for applications in LTE Band7 (2500~2570 MHz UL, 2620~2690 MHz DL).

YTLD2512C is designed with ROFS's Film Bulk Acoustic Resonator (FBAR) technology, which provides high-Q filters and meets requirements of low insertion loss, high VSWR decreases loss at Tx port, high out-of-band attenuation, high power handling and stringent linearity.


YTLD2512C uses chip scale packaging (CSP) technology to assembly the filters into a molded chip-on-board module with the footprint of 1.8mm x 1.4mm and height of 0.61mm.

### Features

- Miniature Size  
1.8 mm x 1.4 mm x 0.61 mm
- Insertion Loss:
  - Tx 2.1 dB Typ.
  - Rx 2.1 dB Typ.
- Tx-RX Isolation:
  - Tx Pass Band 53 dB Typ.
  - Rx Pass Band 60 dB Typ.
- Tx Input Power
  - +30 dBm CW for 5000h @ +55°C
- ESD protection ability: Class1C
- Moisture Sensitivity: MSL3
- Storage Temperature: -40 to +85 °C

### Environmental


- Full implement with RoHS compliant
- Lead Free (Pb free)

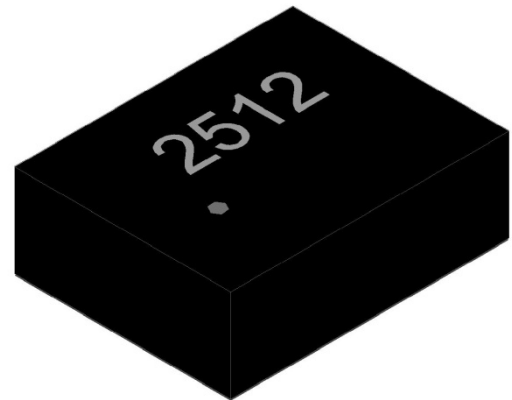

8 Pin 1.8 x 1.4 x 0.61mm Package

### Functional Block Diagram (Top Thru View)

View)

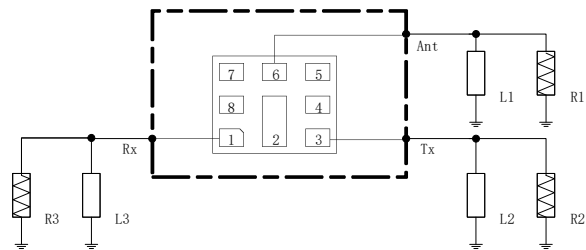

Reference Des.	Value	Description
R1	50ohm	
R2	50ohm	
R3	50ohm	
L1	2.0nH	Ideal Inductor
L2	6.2nH	Ideal Inductor
L3	3.6nH	Ideal Inductor

### Pin Connection

No.	Function
1	Rx
3	Tx
6	Ant
2,4,5,7,8	Ground



## Electrical Specification

Transmit Port to Antenna Port				
Parameter (Operation Temperature: -20 to +85 °C)	Min	Typ*	Max	Unit
<b>Insertion Loss</b> (2500~2570MHz)	/	2.1	2.8	dB
<b>Ripple</b> (2500~2570MHz)	/	0.7	1.5	dB
<b>VSWR</b> (2500~2570MHz,ANT Port)	/	1.3	1.8	\
<b>VSWR</b> (2500~2570MHz,TX Port)	/	1.3	1.8	\
<b>Absolute Attenuation</b> (500~8000MHz)				
(500~1560MHz)	30	39	/	dB
(1565 ~1606MHz)	34	39	/	dB
(1805~1880MHz)	33	38	/	dB
(2110~2170MHz)	36	43	/	dB
(2300~2400MHz)	34	39	/	dB
(2400~2472MHz)	33	38	/	dB
(2472~2481MHz)	24	29	/	dB
(2620~2690MHz)	52	57	/	dB
(3400~3600MHz)	31	36	/	dB
(5000~5140MHz, <i>2fo</i> )	26	31	/	dB
(5600~7500MHz)	22	29	/	dB
(7500~7710MHz, <i>3fo</i> )	41	46	/	dB
Antenna Port to Receive Port				
Parameter (Operation Temperature: -20 to +85 °C)	Min	Typ*	Max	Unit
<b>Insertion Loss</b> (2620~2690MHz)	/	2.1	2.8	dB
<b>Ripple</b> (2620~2690MHz)	/	0.8	1.5	dB
<b>VSWR</b> (2620~2690MHz,ANT Port)	/	1.4	1.8	\
<b>VSWR</b> (2620~2690MHz,RX Port)	/	1.3	1.8	\
<b>Absolute Attenuation</b> (500~8000MHz)				
(500~1680MHz)	40	50	/	dB
(1710~1785MHz)	43	48	/	dB
(1920~1980MHz)	40	45	/	dB
(2400~2500MHz)	43	48	/	dB
(2500~2570MHz)	46	51	/	dB
(2750~4900MHz)	40	45	/	dB
(5240~5380MHz, <i>2fo</i> )	34	39	/	dB
(5400~7800MHz)	22	29	/	dB
(7860~7965MHz, <i>3fo</i> )	33	38	/	dB



---

## Transmit Port to Receive Port

---

Parameter(Operation Temperature: -20 to +85 °C)	Min	Typ*	Max	Unit
<b>Isolation</b>				
2500~2570MHz	47	53	/	dB
2620~2690MHz	53	60	/	dB

\*Data is the integrated value of the linear s-parameter over indicated band

\* Typical value at 25±3 °C



## Typical Performance at Tc=25°C

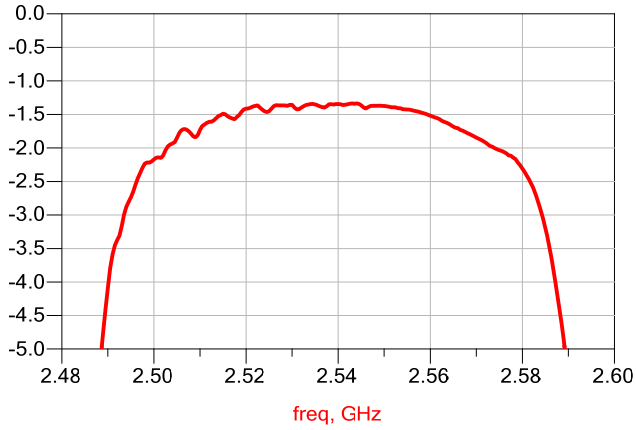


Figure1. TX-ANT Passband

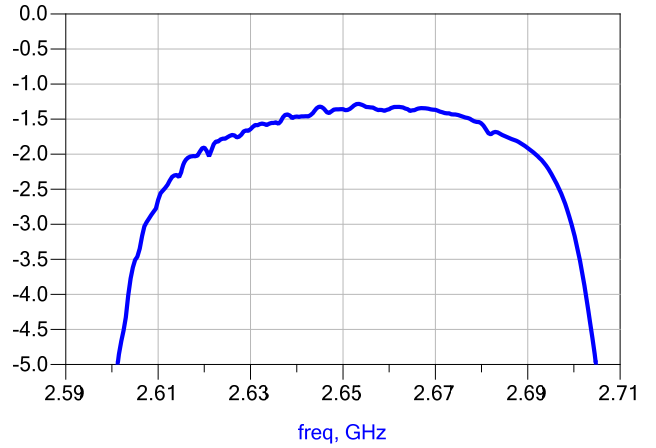


Figure2. ANT-RX Passband

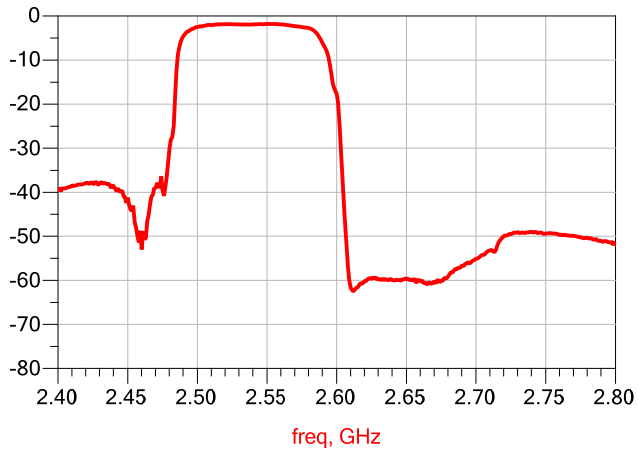


Figure3. TX-ANT

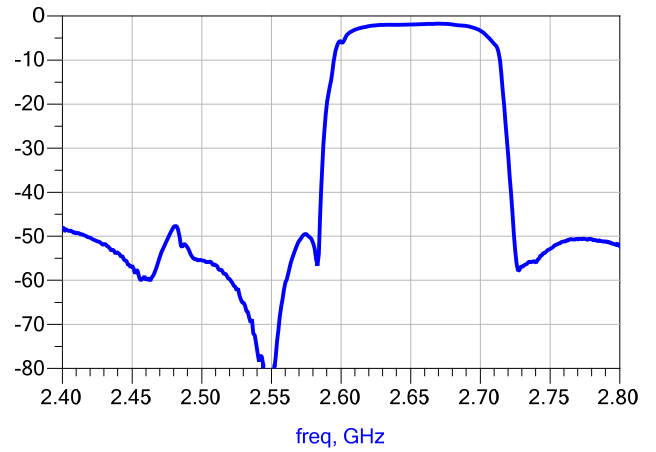


Figure4. ANT-RX

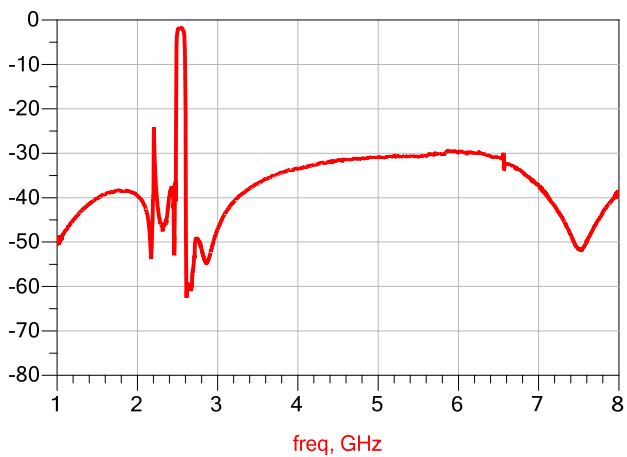


Figure5. TX-ANT Wideband


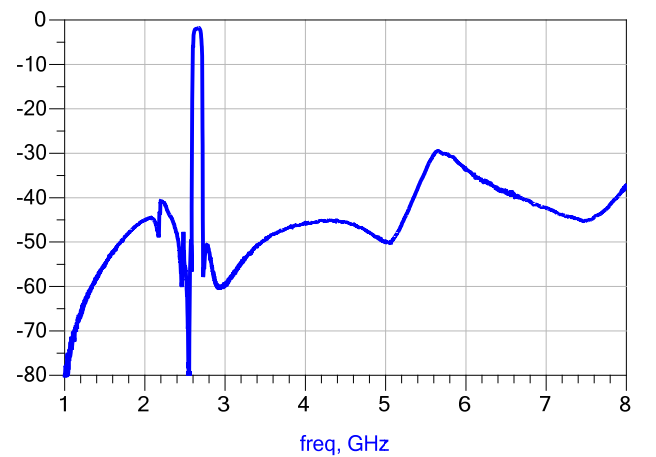



Figure6. ANT-RX Wideband




## Typical Performance at Tc=25°C

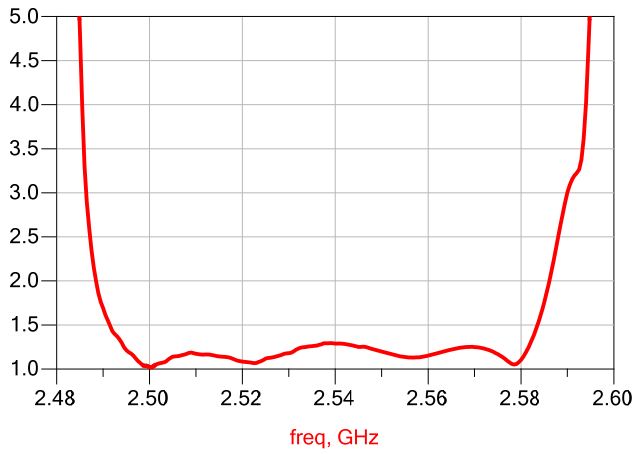


**Figure7. TX Port VSWR**

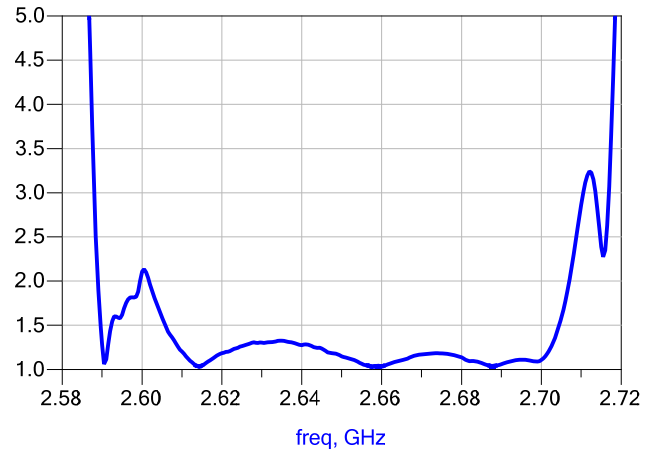

**Figure8. RX Port VSWR**

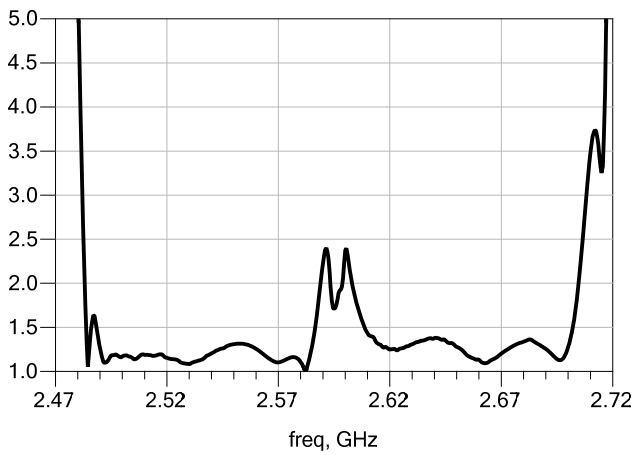


**Figure9. Ant Port VSWR**

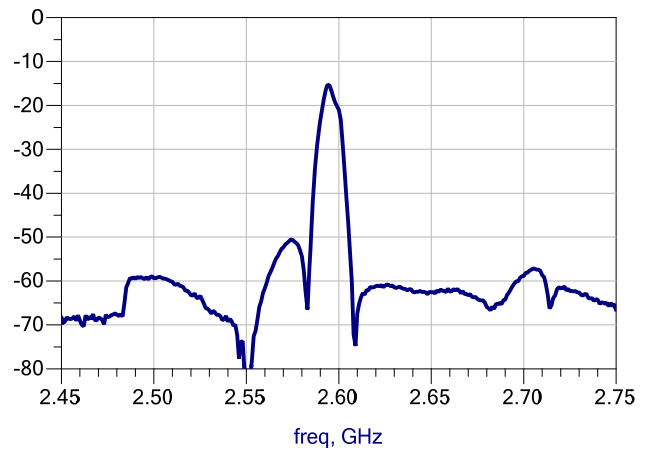

**Figure10. TX - RX Isolation**




Typical Performance at Tc=25°C

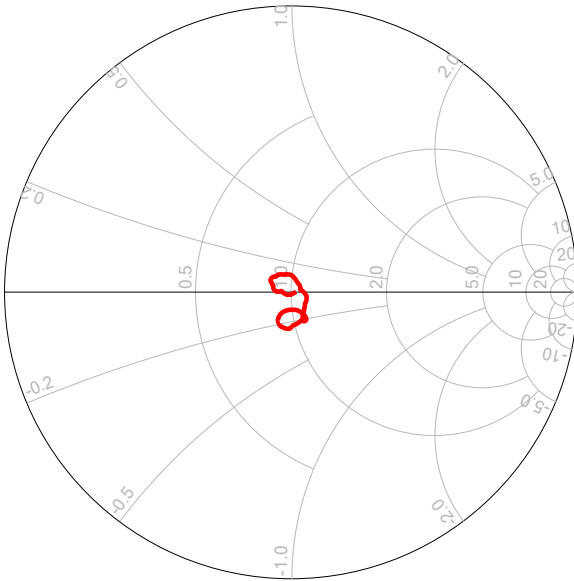


freq (2.500GHz to 2.570GHz)

Figure11. TX Smith Chart

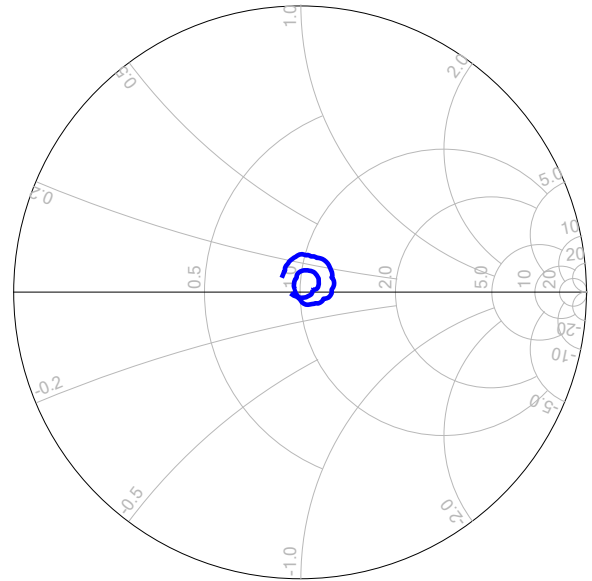


freq (2.620GHz to 2.690GHz)

Figure12. RX Smith Chart

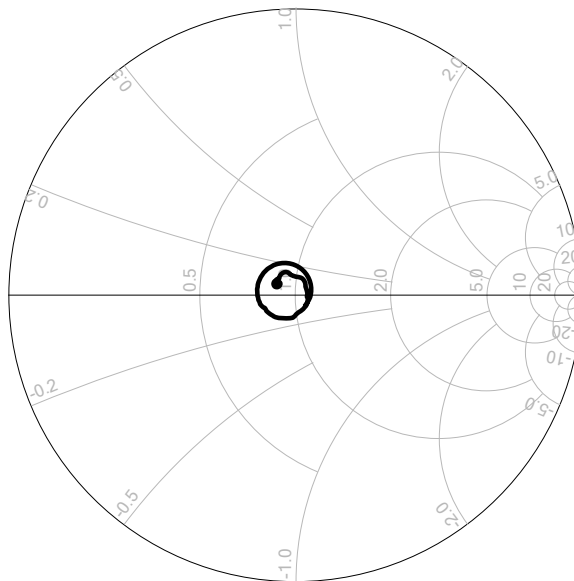

freq (2.500GHz to 2.570GHz)

Figure13. Ant (Tx Pass Band) Smith Chart

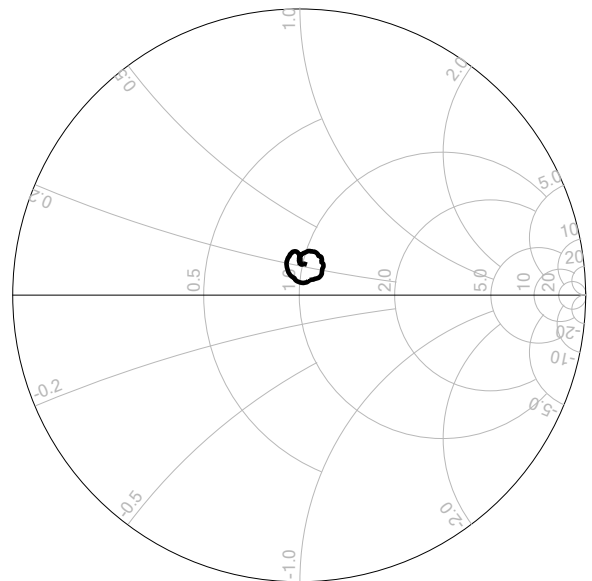


freq (2.620GHz to 2.690GHz)


Figure14. Ant (Rx Pass Band) Smith Chart




## Pac kage Outline

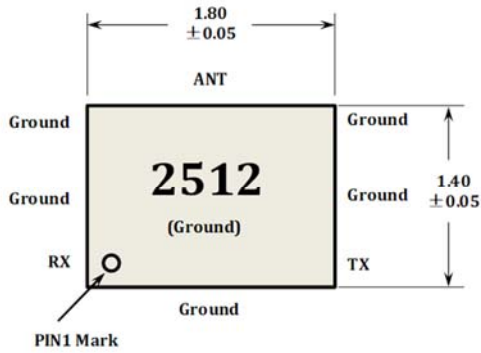

**Top View**



**Side View**

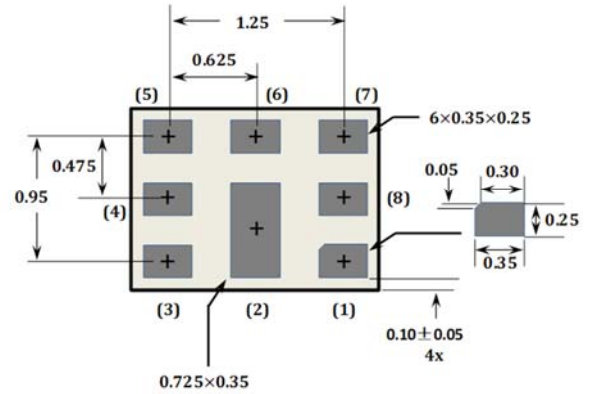

**Bottom View**

**Note:**

1. Dimension: mm
2. Dimensions nominal unless otherwise noted
3. Contact area are gold plated
4. Pad(1)(2) is single size, others are same size
5. 2512 is product code

No.	Function
1	Rx
3	Tx
6	Ant
2,4,5,7,8	Ground


## Order Information

P/N	Qty/Reel	Container
YTLD2512C	4000	7 inch Reel





## Packing

### 1. Tape Dimension

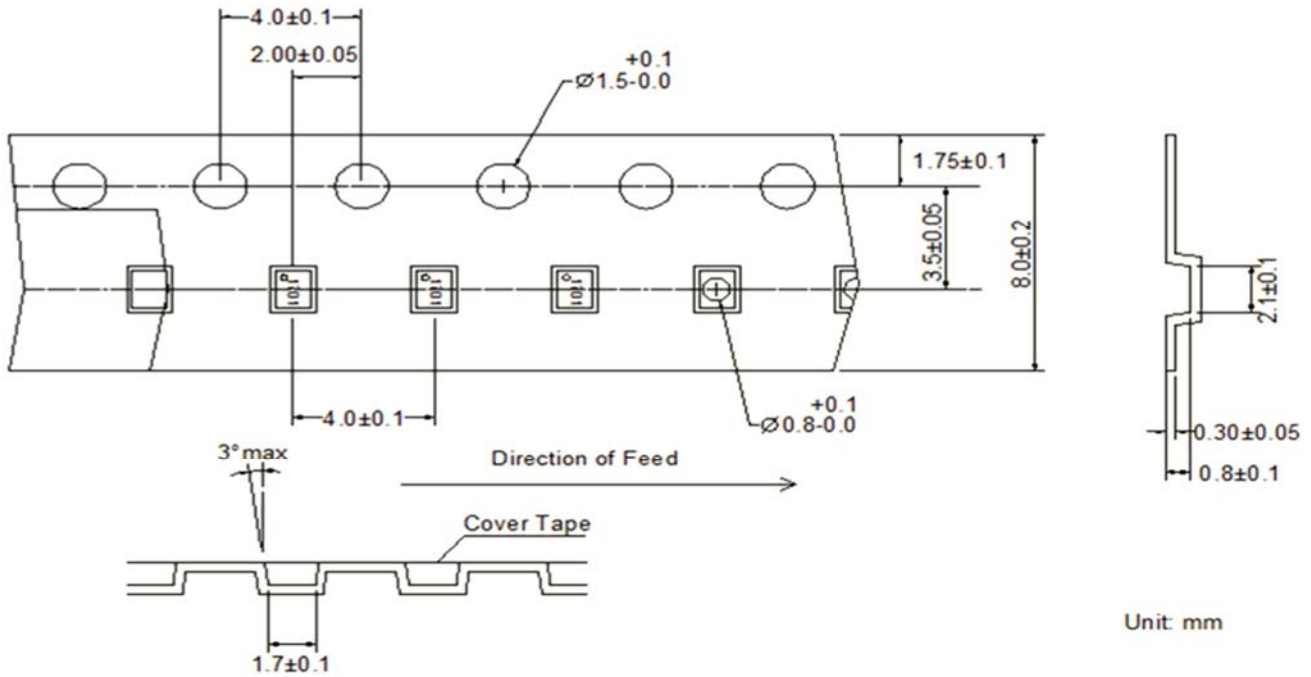

### 2. Reel Dimension

4000Pcs/Reel

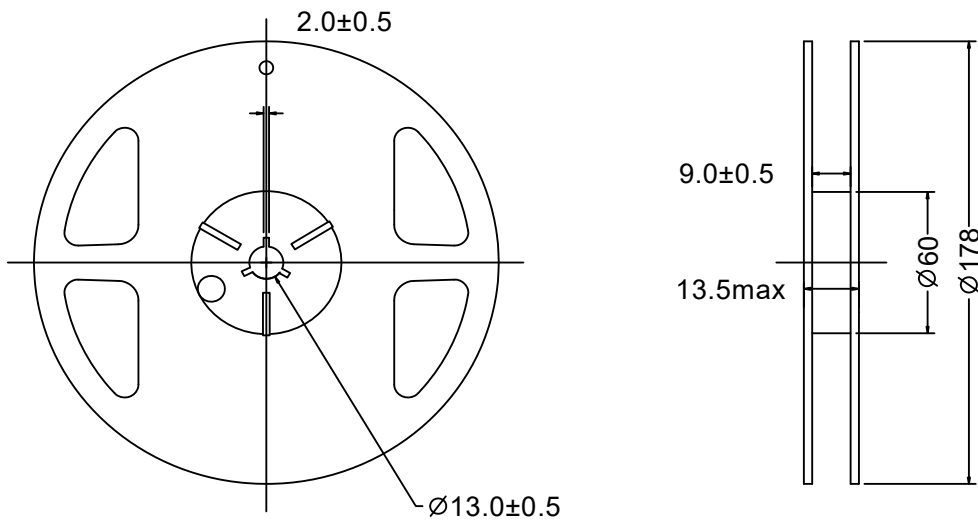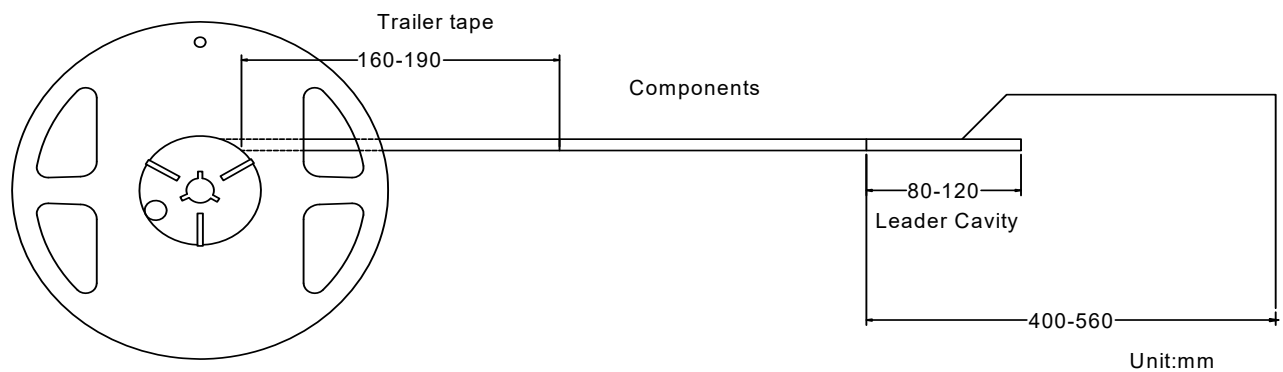



## Recommended Reflow Profile

