


## Card Edge Connectors 0.156" (3.96mm) Pitch


### Features:

- 0.156" (3.96mm) contact spacing x 0.200" (5.08mm) row spacing
- Accepts 0.062" (1.57mm) nominal thickness P.C. board
- High profile insulator body, 0.630" (16.00mm)
- Press-fit contact termination option include 0.031" (0.79mm) square wire wrap & P. C. tails
- Modular design permits any connector length assembly
- Accepts between contact and in-contact polarizing keys
- RoHS Compliant

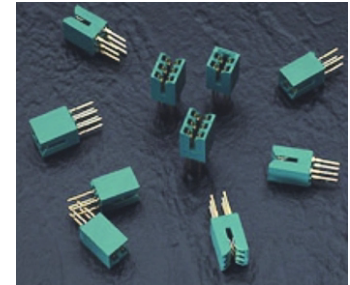

### Specifications:


Insulator Material	UL 94V-0 Diallyl Phthalate, Green Color
Contact Material	Copper Alloy
Contact Plating	Gold Plating Over Nickel for Entire Contact
Current Rating	5 amps
Contact Resistance	10 milliohms maximum
Dielectric Withstanding Voltage	1800 V AC rms at sea level between adjacent contacts
Insulation Resistance	5000 megaohms minimum
Operating Temperature	-65°C to +125°C
Insertion Force	16 oz (4.45 N) maximum per contact pair when tested with .070" (1.78mm) thick gauge
Withdrawal Force	1 oz (0.28 N) minimum per contact pair when tested with .054" (1.37mm) thick gauge

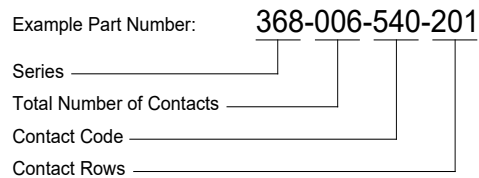


Series:  
368

<b>Total Number of Contacts:</b>	<b>Contact Rows:</b>			
004	End Module			
006	Center Module			
<b>Contact Code:</b>	<b>Tail Description:</b>	<b>Tail Size:</b>	<b>Tail Length "G":</b>	
520	P.C. Tail	.031 (0.79) Square	.380 (9.65)	
540	Wire Wrap	.031 (0.79) Square	.600 (15.24)	
<b>Contact Rows:</b>				
201				




4 CONTACT END MODULE



6 CONTACT CENTRE MODULE

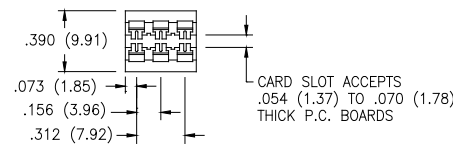

FOR BETWEEN CONTACT POLARIZING KEY, SPECIFY P/N 368-240-318

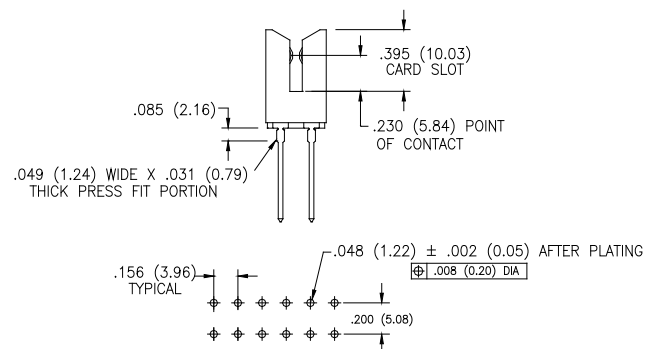

RECOMMENDED HOLE PATTERN FOR PRESS FIT

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[EDAC:](#)

[368-004-520-201](#) [368-004-540-201](#) [368-006-520-201](#) [368-006-540-201](#)