


PRODUCT BRIEF

Intel® Integrated RAID Module RMS25CB  
and RMT3CB Family



# Intel® Integrated RAID Module RMS25CB and RMT3CB Family



6Gb/s SAS/SATA Intelligent Hardware RAID Modules for Select Intel® Server Boards  
based on the Intel® Xeon® Processor E5 Family

# Intel® Integrated RAID Modules RMS25CB and RMT3CB Family

6Gb/s SAS/SATA Full Hardware RAID Modules for Select Intel® Server Boards

## Product Overview:

The new Intel® RAID Modules RMS25CB080, RMS25CB040 and RMT3CB080 are uniquely designed to offer advanced RAID and configuration flexibility to select Intel® server boards based on the Intel® Xeon® processor E5 family. Their 1U capable, mezzanine board form factor affords configuration flexibility by delivering intelligent hardware RAID 0/1/5/6 functionality without taking up a standard add-in card slot.

The Intel RMS25CB and RMT3CB family of products, powered by LSI\* MegaRAID\* technology, include two 800MHz processor cores and up to 1GB DDR3 1333MHz cache memory to drive exceptional storage performance and scalability. Furthermore, the modules come with an option for either traditional battery-based cache backup or a Maintenance Free Backup Unit (MFBU). The MFBU utilizes a super-capacitor to copy data in flight from dynamic memory to NAND flash-based memory when a server loses power or crashes. Also, the MFBU eliminates maintenance associated with Lithium Ion (LiON) batteries, is more environmentally friendly, and is expected to offer a lower total cost of ownership over the life of the RAID module.

## Target Market:


The Intel RMS25CB and RMT3CB family of products are best deployed in mainstream server environments to help optimize the performance and reliability of applications such as database servers, e-mail servers, and web servers. Alternatively, these modules can be teamed with a SAS expander board such as the Intel® RAID Expander RES2CV360 to offer scalable performance solutions for applications such as streaming media. In addition, by connecting one or more SSD's to these modules and adding the SSD Cache 2.0 with FastPath\* I/O upgrade feature, the performance of most applications can be further enhanced.

## Key Advantages:

- **System design flexibility** - 1U capable system boards connect to the Storage I/O expansion slot on select Intel server boards based on the Intel Xeon processor E5 family. These modules can be used with Intel and 3rd party chassis without taking up a standard add-in card slot and without the need for a riser card or low profile chassis cutout.
- **Exceptional data protection and performance** - Supports data redundancy using SAS or SATA hard disk drives through mirroring, parity and double parity (RAID levels 1, 5, and 6). It also provides striping capability for spans (RAID levels 10, 50, and 60). Plus, the dual-core LSI SAS2208 ROC technology, x8 PCI Express\* Generation 3<sup>1</sup> host interface and DDR3 cache enhance the performance of mainstream applications.
- **Improved serviceability with an optional MFBU** - The Maintenance Free Backup Unit (MFBU) is built using NAND flash that can retain data for up to ten years. It provides near-instant optimal RAID performance versus traditional LiON battery backup units (BBUs), which are limited to just days of retention and can take up to eight hours to charge. In addition, this longer-lasting technology allows for the same standard three year warranty as other Intel RAID products.
- **Support for premium feature upgrades** - The RMS25CB080 includes a connector for an optional hardware-based key which unlocks one or more advanced software algorithm designed to improve performance and enhance data protection. For instance, the SSD Cache with FastPath\* I/O upgrade enables the use of one or more SSD as a large cache pool for the RAID controller. This can significantly improve the performance of many server applications.

## Why Intel® RAID?

Intel provides a broad portfolio of RAID products to allow for storage solutions tailored to meet every business need. All Intel RAID components are thoroughly validated across multiple platforms with Intel® boards, chassis and systems for seamless installation and interoperability with other technology. Customized training, as well as Intel service and support, make Intel the primary source for customers seeking data protection, increased productivity and simplified IT.

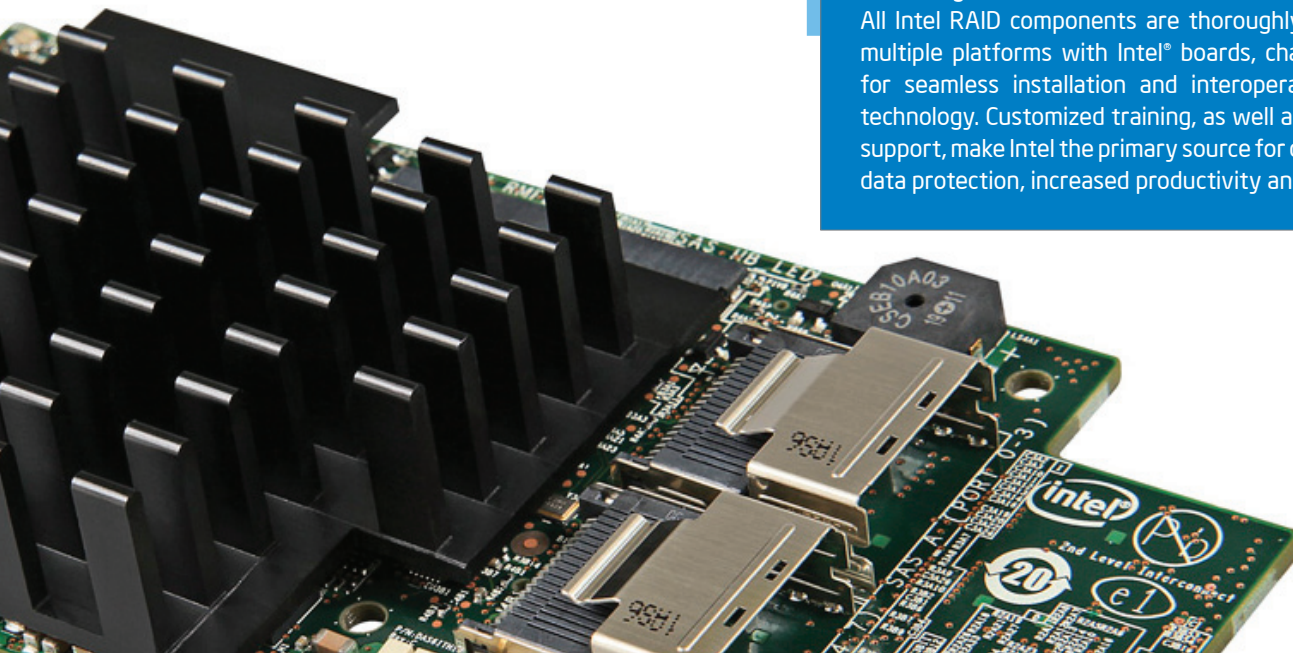


# Intel® Integrated RAID Modules RMS25CB and RMT3CB Family


Powered by LSI\* MegaRAID\* Technology

## Features:

- 1 LSI SAS2208 ROC controller provides SAS 2 compliance, including 6Gb/s data transfer
- 2 Up to 1GB DDR3 1333MHz cache (ECC DDR3 memory) that efficiently stores data in transition
- 3 Up to two SFF8087 SAS/SATA connectors for up to eight internal ports
- 4 x8 PCI Express Generation 3<sup>1</sup> interface for fast communication with the server board
- 5 Connector for optional Intel® RAID Premium Feature Keys which offer features such as SSD Cache 2.0 with FastPath I/O
- 6 Optional Intel® RAID Smart Battery Backup Unit or Intel® RAID Maintenance Free Backup Unit

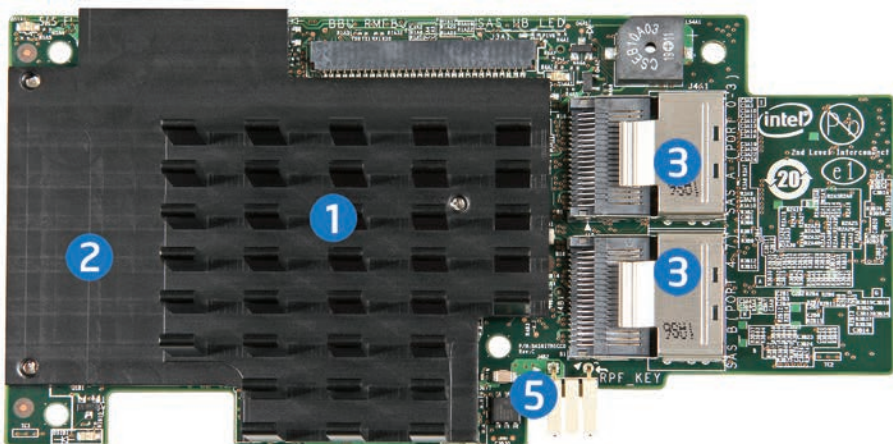

- 4 Unique x8 PCIe server board connector on bottom of module

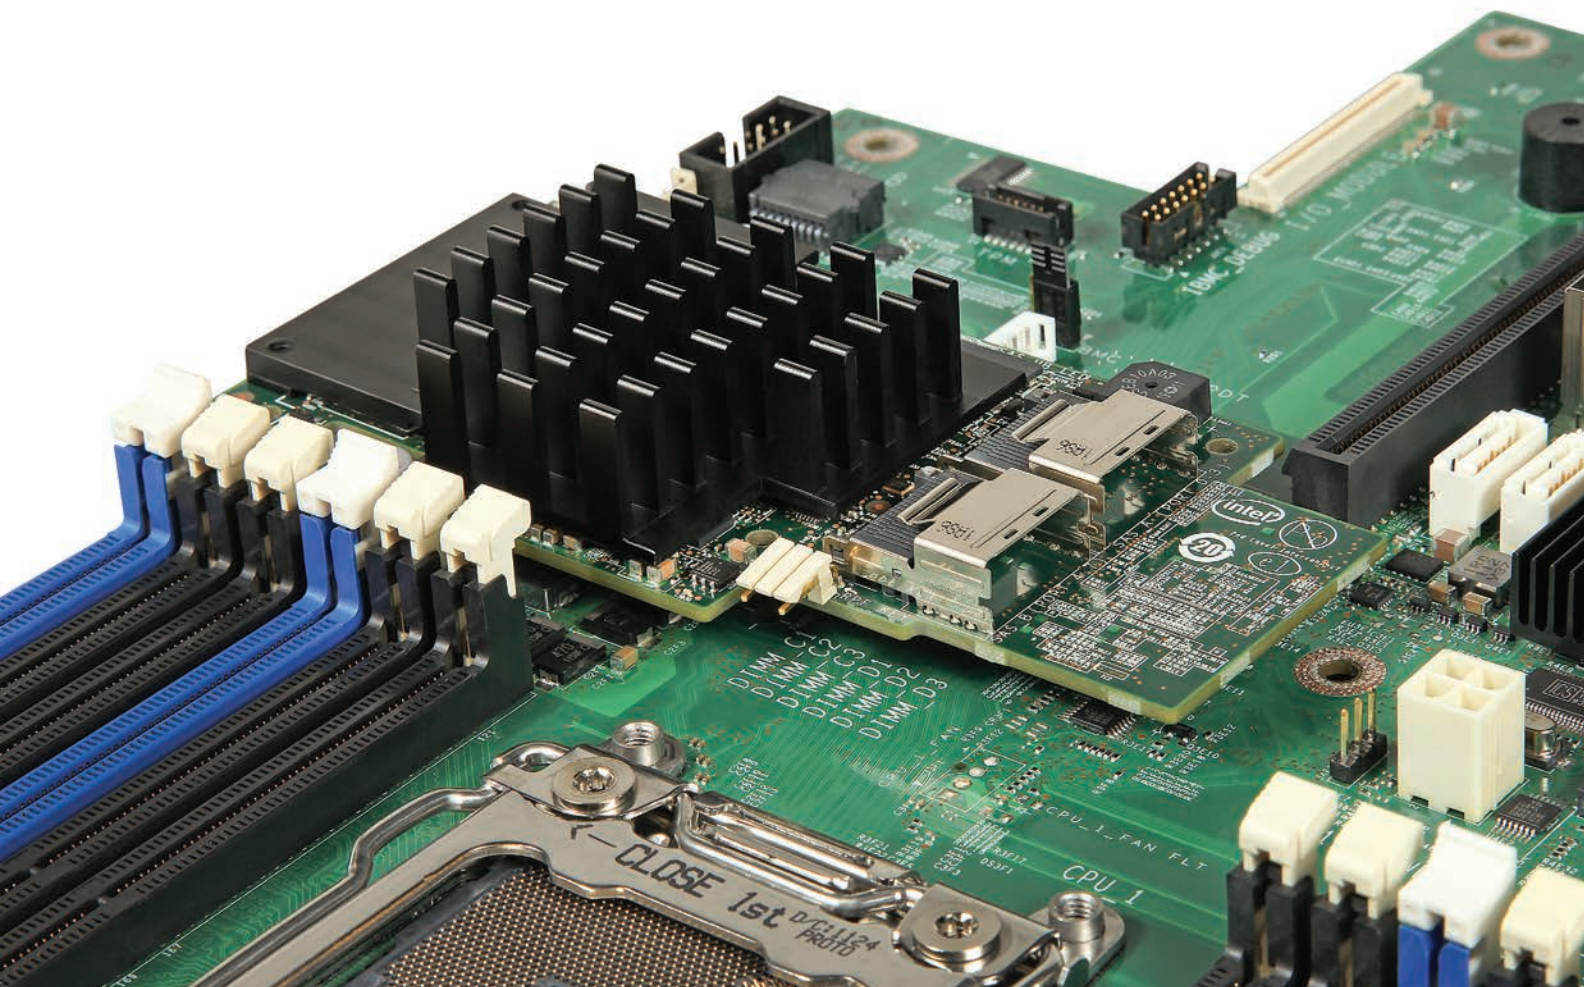

## Technical Specifications:

<b>Base Product Order Codes</b>	RMS25CB080 (8 port SAS w/ 1GB DDR3) RMS25CB040 (4 port SAS w/ 1GB DDR3) RMT3CB080 (8 port SATA w/ 512MB DDR3)
<b>Accessories</b>	AXXRSBBU9 (Lithium Polymer BBU) AXXRMFBU2 (Maintenance Free Backup Unit) AXXRPFKSSD2 (SSD Cache 2.0 with FastPath I/O Upgrade) AXXRPFKDE2 (Drive Encryption Management) AXXRPFKSNH2 (Rapid Recovery Snapshot)
<b>Cables</b>	Multiple kits are available to best fit the chassis that the module is installed in. See <a href="http://www.intel.com/go/RAID">www.intel.com/go/RAID</a> for details.
<b>RAID Levels and Spans</b>	RAID Levels 0, 1, 5 and 6 RAID Spans 10, 50 and 60
<b>Data Protection Feature Highlights</b>	Online Capacity Expansion Hot-Spare Support - Global and Dedicated Single Controller Multipathing (Failover) Enclosure Management (SES2, SGPIO) Background Consistency Checking Patrol Read for Media Functionality S.M.A.R.T. Support
<b>Intel® RAID Software</b>	Intel® RAID Web Console 2 Intel® RAID Command Line Tool Intel® RAID Flash Utilities
<b>I/O Processor</b>	LSI SAS2208 ROC running at 800 MHz
<b>Drive Types</b>	SAS 6Gb/s or SATA 6Gb/s, SAS 3Gb/s or SATA 3Gb/s (RMT3CB080 accepts SATA drives only)
<b>Maximum Drives</b>	RMS25 models support up to 128 physical devices; RMT3 model supports up to 32 physical devices
<b>Maximum RAID Volumes (Virtual Drives)</b>	64
<b>Connectors</b>	080 models have two SAS SFF8087 x4 SAS internal connectors; 040 models have one 4-port connector
<b>Cache Memory</b>	RMS25 models include 1GB embedded DDR3 at 1333MHz; RMT3 model includes 512MB embedded DDR3
<b>PCI Interface</b>	x8 PCI Express* 2.0/3.0 <sup>1</sup>
<b>Cache Backup</b>	Option for Lithium Polymer BBU or Maintenance Free NAND and Supercap module backup
<b>Form Factor</b>	1U Capable Mezzanine Card
<b>Data Transfer Rates</b>	Up to 6Gb/s per port
<b>Operating Temperature</b>	Maximum ambient: 65°C (55°C with optional BBU)
<b>Operating Voltage</b>	+3.3 V
<b>Intel Server Boards Supported</b>	Intel® Server Boards S2600GZ, S2600IP, W2600CR, S2400EP, S2400GP and systems including these motherboards
<b>Operating Systems</b>	Extensive support includes Microsoft® Windows® Vista/2008/ Server 2003/2000/XP, Linux®, Solaris®(x86), Netware®, FreeBSD®, VMware® and more. Visit <a href="http://intel.com">intel.com</a> for a complete list of supported operating systems

For more information on Intel® RAID products, visit: [www.intel.com/go/RAID](http://www.intel.com/go/RAID)

<sup>1</sup>At launch, compatibility will be limited to PCIe Gen2. PCIe Gen3 support is anticipated to be added by August 2012 and will require a module with a manufacture date that follows the addition of PCIe Gen3 support.

INFORMATION IN THIS DOCUMENT IS PROVIDED IN CONNECTION WITH INTEL PRODUCTS. NO LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE, TO ANY INTELLECTUAL PROPERTY RIGHTS IS GRANTED BY THIS DOCUMENT. EXCEPT AS PROVIDED IN INTEL'S TERMS AND CONDITIONS OF SALE FOR SUCH PRODUCTS, INTEL ASSUMES NO LIABILITY WHATSOEVER AND INTEL DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY, RELATING TO SALE AND/OR USE OF INTEL PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. UNLESS OTHERWISE AGREED IN WRITING BY INTEL, THE INTEL PRODUCTS ARE NOT DESIGNED NOR INTENDED FOR ANY APPLICATION IN WHICH THE FAILURE OF THE INTEL PRODUCT COULD CREATE A SITUATION WHERE PERSONAL INJURY OR DEATH MAY OCCUR.

Intel may make changes to specifications and product descriptions at any time, without notice. Designers must not rely on the absence or characteristics of any features or instructions marked "reserved" or "undefined". Intel reserves these for future definition and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to them. The information here is subject to change without notice. Do not finalize a design with this information.

The products described in this document may contain design defects or errors known as errata which may cause the product to deviate from published specifications. Current characterized errata are available on request.

Contact your local Intel sales office or your distributor to obtain the latest specifications and before placing your product order.

Intel, the Intel logo and Xeon are trademarks of Intel Corporation in the U.S. and/or other countries.


\*Other names and brands may be claimed as the property of others.

Copyright © 2012 Intel Corporation. All rights reserved.

0212/SJ/Exact/PDF

 Please Recycle

326853-001US



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Intel:](#)

[RMS25CB040](#) [RMS25CB080](#) [RMT3CB080](#)