


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	E1	NEW DRAWING PER ECO-11-019045	02APR12	KH	DR
	E2	REVISED PER ECO-17-007400	29NOV2017	RS	DR

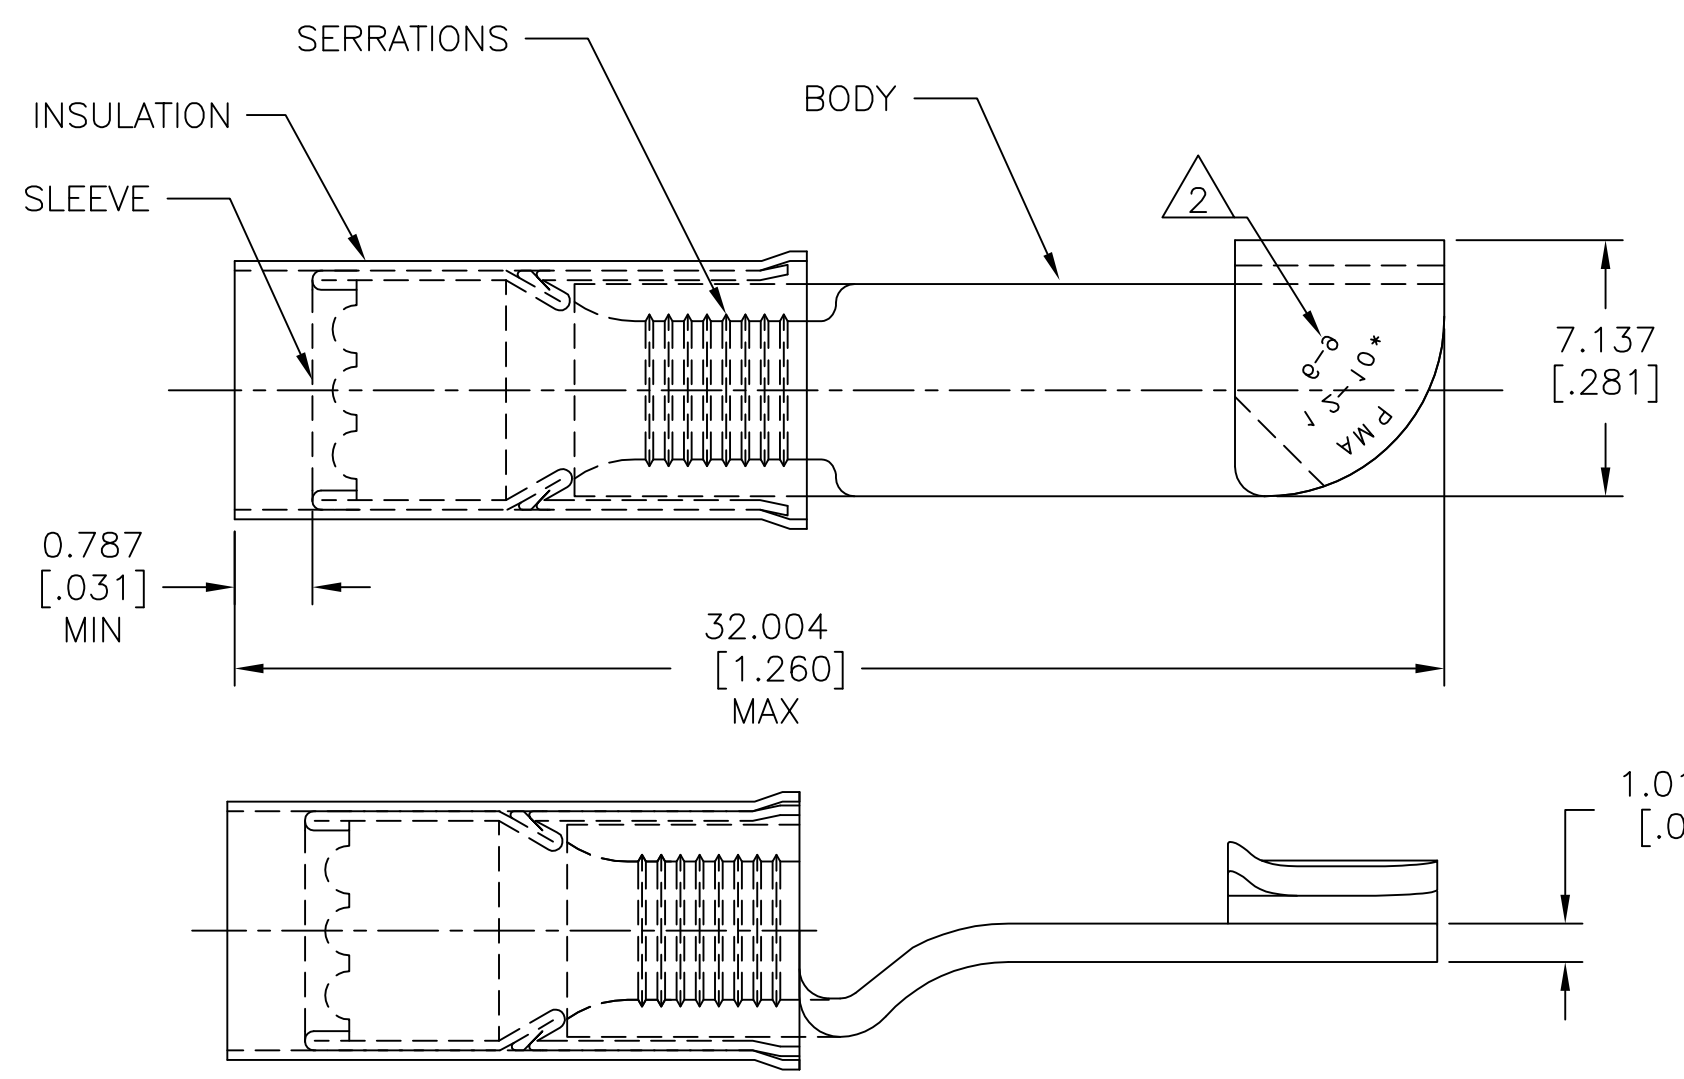

AMP WIRE RANGE	Listed FILE E13288
12-10 AWG SOLID OR STRANDED	12-10 AWG SOLID OR STRANDED

- 1 FOR $\phi 3.810[\phi.150]$ TO $\phi 6.350[\phi.250]$ WIRE INSULATION.
- 2 STAMP AMP 12-10* 6-9 APPROX AS SHOWN
- 3 MATERIAL:
BODY&SLEEVE: COPPER PER ASTM B152
INSULATION: NYLON
- 4 FINISH:
BODY&SLEEVE: TIN PLATE PER ASTM B152
INSULATION: COLOR-YELLOW.

500	LOOSE PC	35762
QTY	PACKAGE TYPE	PART NO

AMP INCORPORATED
CUSTOMER SERVICE SYSTEMS

FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS
 PRODUCT INFORMATION CENTER
 1-800-522-6752

FOR APPLICATION TOOLING INFORMATION
 TOOLING ASSISTANCE CENTER
 1-800-722-1111

FOR ORDER ENTRY
 1-800-526-5142

RECOMMENDED OPERATING TEMPERATURE:
 105°C [221°F]

VOLTAGE RATING:
 300V MAX

WIRE CROSS SECTIONAL AREA RANGE:
 2.62-6.64mm² [5,180-13,100]
 SOLID OR STRANDED

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:
	0 PLC ± -
	1 PLC ± -
	2 PLC ± -
	3 PLC ± 0.127[.005]
	4 PLC ± -
	ANGLES ± 5°
MATERIAL	FINISH
3	4

DWN KIRAN HOLAL 02APR12	TE Connectivity WIRE TERMINAL P.I.D.G-KNIFE-DISCONNECT WIRE SIZE:12-10	RESTRICTED TO	
CHK ROHDE DANIEL 02APR12		SIZE	CAGE CODE
APVD ROHDE DANIEL 02APR12		DRAWING NO	REV
PRODUCT SPEC UL 486 A-B		114-2157	E2
APPLICATION SPEC	WEIGHT	SCALE	SHEET
	-	5:1	1 OF 1
CUSTOMER DRAWING		SHEET 1 OF 1	