

Type 3 surge protection plug - PLT-SEC-T3-120-P - 2905234

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Replacement plug for type 3 device protection from the PLUGTRAB SEC T3 product range. 120 V nominal voltage.

The illustration shows version PLT-SEC-T3-230-P

Why buy this product

- Varistor-based device protection
- Can be used without separate backup fuse thanks to integrated overcurrent protection
- Pluggable
- Optical status indicator via LED
- Plugs can be checked with CHECKMASTER 2

Key Commercial Data

Packing unit	1 STK
GTIN	 4 046356 939874
GTIN	4046356939874
Weight per Piece (excluding packing)	40.000 g
Custom tariff number	85363030
Country of origin	Germany

Technical data

Dimensions

Height	60.9 mm
Width	17.5 mm
Depth	44.8 mm
Horizontal pitch	1 Div.

Type 3 surge protection plug - PLT-SEC-T3-120-P - 2905234

Technical data

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-40 °C ... 70 °C
Ambient temperature (storage/transport)	-40 °C ... 70 °C
Altitude	≤ 2000 m (amsl (above mean sea level))
Permissible humidity (operation)	5 % ... 95 %
Shock (operation)	30g (half sinus / 11 ms / 3x ±X, ±Y, ±Z)
Vibration (operation)	5g (10 ... 150 Hz/20 cycles/axis/X, Y, Z)

General

IEC test classification	III
	T3
EN type	T3
Mode of protection	L-N
	L-PE
	N-PE
	(L+) - (L-)
	(L+/L-) - PE
Mounting type	On base element
Color	light grey RAL 7035
Housing material	PA 6.6-FR 20% GF
	PA 6.6-FR
Degree of pollution	2
Flammability rating according to UL 94	V-0
Design	Male
Number of positions	2
Surge protection fault message	optical

Protective circuit

Nominal voltage U_N	120 V AC (TN-S)
	120 V AC (TT - only in use with RCD)
Nominal frequency f_N	50 Hz (60 Hz)
Maximum continuous voltage U_C	150 V AC
	150 V DC
Residual current I_{PE}	≤ 5 μA
Nominal discharge current I_n (8/20) μs	3 kA
Standby power consumption P_C	≤ 150 mVA (at U_{REF})
	≤ 175 mVA (at U_C)
Reference test voltage U_{REF}	132 V AC

Type 3 surge protection plug - PLT-SEC-T3-120-P - 2905234

Technical data

Protective circuit

Combination wave U_{OC}	6 kV
Voltage protection level U_p (L-N)	≤ 0.85 kV
Voltage protection level U_p (L-PE)	≤ 0.95 kV
Voltage protection level U_p (N-PE)	≤ 0.95 kV
TOV behavior at U_T (L-N)	240 V AC (5 s / withstand mode)
	240 V AC (120 min / withstand mode)
TOV behavior at U_T (L-PE)	240 V AC (5 s / withstand mode)
	240 V AC (120 min / withstand mode)
	1332 V AC (200 ms / safe failure mode)
TOV behavior at U_T (N-PE)	1200 V AC (200 ms / safe failure mode)
Response time t_A (L-N)	≤ 25 ns
Response time t_A (L-PE)	≤ 100 ns
Response time t_A (N-PE)	≤ 100 ns
Short-circuit current rating I_{SCCR}	1.5 kA AC
	0.25 kA DC

Connection data

Connection method	pluggable
-------------------	-----------

UL specifications

SPD Type	4CA
Maximum continuous operating voltage MCOV	150 V AC
	150 V DC
Nominal voltage	120 V DC
Mode of protection	L-N
	L-G
	N-G
	(L+) - (L-)
	(L+) - G
	(L-) - G
Power distribution system	1
Nominal frequency	50/60 Hz
Measured limiting voltage MLV (L-N)	780 V
Measured limiting voltage MLV (L-G)	760 V
Measured limiting voltage MLV (N-G)	760 V
Measured limiting voltage MLV (L+) - (L-)	780 V
Measured limiting voltage MLV (L+) - G	760 V
Measured limiting voltage MLV (L-) - G	760 V

Type 3 surge protection plug - PLT-SEC-T3-120-P - 2905234

Technical data

UL specifications

Nominal discharge current I_n	3 kA
---------------------------------	------

Standards and Regulations


Standards/specifications	EN 61643-11 2012
--------------------------	------------------

Environmental Product Compliance


China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings

Circuit diagram



Dimensional drawing

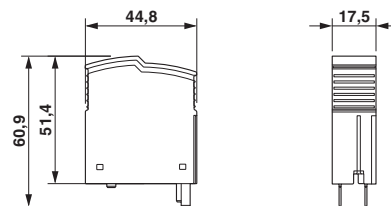

Classifications

eCl@ss

eCl@ss 5.1	27130801
eCl@ss 6.0	27130806
eCl@ss 8.0	27130806
eCl@ss 9.0	27130806

ETIM

ETIM 5.0	EC000942
ETIM 6.0	EC000942

UNSPSC

UNSPSC 13.2	39121620
-------------	----------

Approvals

Approvals

Approvals

KEMA-KEUR / CCA / UL Recognized / cUL Recognized / EAC / GL / CSA / cULus Recognized

Type 3 surge protection plug - PLT-SEC-T3-120-P - 2905234

Approvals

Ex Approvals

UL Recognized / cUL Recognized / cULus Recognized

Approval details

KEMA-KEUR		http://www.dekra-certification.com	2173868.01
CCA			NTR-NL 7399
UL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 330181
cUL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 330181
EAC			RU C-DE.A*30.B01561
GL		http://exchange.dnv.com/tari/	14588-15 HH
CSA		http://www.csagroup.org/services/testing-and-certification/certified-product-listing/	70056020
cULus Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	