


# Resin-Molded, Radial-Lead Solid Tantalum Capacitors

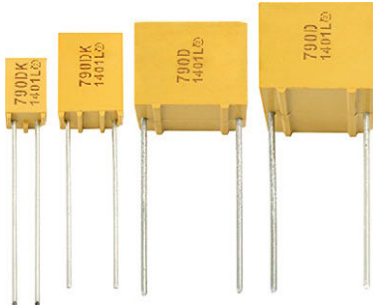

## PERFORMANCE CHARACTERISTICS

**Operating Temperature:** -55 °C to +125 °C  
(above 85 °C, voltage derating is required)

**Capacitance Range:** 0.1 µF to 330 µF

**Capacitance Tolerance:** ± 10 %, ± 20 %

**Voltage Rating:** 6.3 V<sub>DC</sub> to 50 V<sub>DC</sub>

## FEATURES

- Terminations: tin / lead (SnPb), 100 % tin (Sn)
- Four case sizes precisely molded with a flame retardant epoxy resin
- Stand off on all case sizes
- Available on tape for automatic insertion equipment (only A- and B-case, C- and D-case on request)
- Low leakage current
- Low impedance
- Extended value ranges available
- Material categorization: for definitions of compliance please see [www.vishay.com/doc?99912](http://www.vishay.com/doc?99912)



## Note

\* This datasheet provides information about parts that are RoHS-compliant and / or parts that are non RoHS-compliant. For example, parts with lead (Pb) terminations are not RoHS-compliant. Please see the information / tables in this datasheet for details

| ORDERING INFORMATION               |  |                            |  |                                  |                           |  |   |
|------------------------------------|--|----------------------------|--|----------------------------------|---------------------------|--|---|
| 790D                               | 157  | X0                         | 6R3  | C                                | 2                         | B  | E3  |
| MODEL                              | CAPACITANCE  | CAPACITANCE TOLERANCE      | DC VOLTAGE RATING  | CASE CODE                        | STYLE NUMBER              | PACKAGING  | RoHS COMPLIANT  |
| 790D = standard and extended range | Expressed in picofarads. The first two digits are the significant figures. The third is the number of zeros following. | X0 = ± 20 %<br>X9 = ± 10 % | Expressed in volts. To complete the three-digit block, zeros precede the voltage rating. A decimal point is indicated by an "R"<br>(6R3 = 6.3 V) | See Ratings and Case Codes table | Insulated case (standard) | See packing information<br>B: bulk<br>G: ammpack (H = 16.5 mm)<br>H: ammpack (H = 18.5 mm)<br>I: ammpack shouldered leads (A case)<br>X: reel pack (H = 16.5 mm)<br>Y: reel pack (H = 18.5 mm)<br>Z: reel pack shouldered leads (A case) | E3 = 100 % tin termination (RoHS-compliant)<br>Blank = SnPb termination |

| DIMENSIONS in inches [millimeters] |              |              |              |                  |                        |
|------------------------------------|--------------|--------------|--------------|------------------|------------------------|
|                                    |              |              |              |                  |                        |
| CASE CODE                          | H MAX.       | D MAX.       | T MAX.       | E ± 0.006 [0.15] | Ø 0.002 [0.05] (+10 %) |
| A                                  | 0.287 [7.3]  | 0.185 [4.7]  | 0.165 [4.2]  | 0.100 [2.54]     | 0.020 [0.5]            |
| B                                  | 0.413 [10.5] | 0.287 [7.3]  | 0.189 [4.8]  | 0.200 [5.08]     | 0.020 [0.5]            |
| C                                  | 0.413 [10.5] | 0.484 [12.3] | 0.287 [7.3]  | 0.400 [10.16]    | 0.024 [0.6]            |
| D                                  | 0.413 [10.5] | 0.484 [12.3] | 0.484 [12.3] | 0.400 [10.16]    | 0.024 [0.6]            |



| RATINGS AND CASE CODES |  |      |       |      |      |      |      |      |      |      |      |      |      |      |      |       |
|------------------------|--|------|-------|------|------|------|------|------|------|------|------|------|------|------|------|-------|
| C <sub>R</sub><br>(μF) | RATED VOLTAGE U <sub>R</sub> AT +85 °C     |      |       |      |      |      |      |      |      |      |      |      |      |      |      |       |
|                        | 6.3 V                                      |      | 10 V  |      | 16 V |      | 20 V |      | 25 V |      | 35 V |      | 40 V |      | 50 V |       |
|                        | CATEGORY VOLTAGE U <sub>C</sub> AT +125 °C |      |       |      |      |      |      |      |      |      |      |      |      |      |      |       |
|                        | 4.0 V                                      |      | 6.3 V |      | 10 V |      | 13 V |      | 16 V |      | 23 V |      | 25 V |      | 32 V |       |
|                        | STD.                                       | EXT. | STD.  | EXT. | STD. | EXT. | STD. | EXT. | STD. | EXT. | STD. | EXT. | STD. | EXT. | STD. | EXT.  |
| 0.10                   |  |      |       |      |      |      |      |      |      |      |      |      |      | A    |      | A     |
| 0.15                   |  |      |       |      |      |      |      |      |      |      |      |      |      |      | A    | A     |
| 0.22                   |  |      |       |      |      |      |      |      |      |      |      |      |      |      | A    | A     |
| 0.33                   |  |      |       |      |      |      |      |      |      |      |      |      |      | A    |      |       |
| 0.47                   |  |      |       |      |      |      |      |      |      |      |      |      |      | A    |      |       |
| 0.68                   |  |      |       |      |      |      |      |      |      |      |      |      |      |      |      | A     |
| 1.0                    |  |      |       |      |      |      |      |      |      |      |      |      |      | A    |      | A / B |
| 1.5                    |  |      |       |      |      |      |      |      | A    |      |      |      |      | B    |      | B     |
| 2.2                    |  |      |       |      | A    |      | A    |      |      |      |      |      |      | B    |      | B     |
| 3.3                    |  |      |       |      | A    |      |      |      |      |      |      | A    | B    | A    | B    |       |
| 4.7                    |  |      | A     |      |      |      |      |      |      | A    |      |      |      | B    |      | B     |
| 6.8                    | A  |      |       |      |      |      |      | A    |      |      |      |      |      | B    |      | C     |
| 10                     |  |      |       |      |      | A    |      |      | B    |      |      | B    | C    |      |      | C     |
| 15                     |  |      |       | A    | B    |      | B    |      |      | B    |      |      | C    |      |      | C     |
| 22                     |  | A    |       |      | B    |      |      | B    |      | B    |      |      | C    |      |      |       |
| 33                     |  |      | B     |      |      | B    |      |      | C    |      |      | C    |      |      | D    |       |
| 47                     |  | B    |       | B    | C    |      | C    |      |      | D    |      |      |      |      | D    |       |
| 68                     |  |      |       | B    | C    |      |      | C    |      |      |      |      |      |      |      |       |
| 100                    |  |      | C     |      | D    | C    | D    |      |      |      |      |      |      |      |      |       |
| 150                    | C  |      |       | C    |      | D    |      |      |      |      |      |      |      |      |      |       |
| 220                    |  | C    | D     |      |      |      |      |      |      |      |      |      |      |      |      |       |
| 330                    | D  |      |       |      |      |      |      |      |      |      |      |      |      |      |      |       |

| STANDARD RATINGS / EXTENDED RATINGS   |           |                            |                               |                                     |   |  |
|---|-----------|----------------------------|-------------------------------|-------------------------------------|---|--|
| CAPACITANCE<br>C <sub>R</sub> (μF)  | CASE CODE | PART NUMBER                | MAX. DCL<br>AT +25 °C<br>(μA) | MAX. DF<br>120 Hz, AT +25 °C<br>(%) | MAX. IMPEDANCE<br>100 kHz, AT +25 °C<br>(Ω) |  |
| U <sub>R</sub> = 6.3 V <sub>DC</sub> AT +85 °C, SURGE = 8 V; U <sub>C</sub> = 4 V <sub>DC</sub> AT +125 °C, SURGE = 5 V |           |                            |                               |                                     |   |  |
| 6.8   | A         | 790D685X(1)6R3A2(2)        | 1.0                           | 6                                   | 4.0   |  |
| <b>22</b>   | <b>A</b>  | <b>790D226X(1)6R3A2(2)</b> | <b>1.3</b>                    | <b>6</b>                            | <b>2.1</b>                                  |  |
| 47  | B         | 790D476X(1)6R3B2(2)        | 2.9                           | 6                                   | 1.3   |  |
| <b>68</b>   | <b>B</b>  | <b>790D686X(1)6R3B2(2)</b> | <b>4.2</b>                    | <b>6</b>                            | <b>1.3</b>                                  |  |
| 150   | C         | 790D157X(1)6R3C2(2)        | 9.4                           | 6                                   | 0.6   |  |
| <b>220</b>  | <b>C</b>  | <b>790D227X(1)6R3C2(2)</b> | <b>13.8</b>                   | <b>6</b>                            | <b>0.6</b>                                  |  |
| 330   | D         | 790D337X(1)6R3D2(2)        | 20.7                          | 8                                   | 0.4   |  |

**Notes**

- Part number definitions:
  - (1) Insert 0 for ± 20 % tolerance or 9 for ± 10 %
  - (2) See Ordering Information, packaging code
- Extended ratings in bold print



| STANDARD RATINGS / EXTENDED RATINGS  |           |                            |                                     |                                     |  |  |
|--|-----------|----------------------------|-------------------------------------|-------------------------------------|--|--|
| CAPACITANCE<br>$C_R$ ( $\mu$ F)  | CASE CODE | PART NUMBER                | MAX. DCL<br>AT +25 °C<br>( $\mu$ A) | MAX. DF<br>120 Hz, AT +25 °C<br>(%) | MAX. IMPEDANCE<br>100 kHz, AT +25 °C<br>( $\Omega$ ) |  |
| <b><math>U_R = 10 V_{DC}</math> AT +85 °C, SURGE = 13 V; <math>U_C = 6.3 V_{DC}</math> AT +125 °C, SURGE = 8 V</b> |           |                            |                                     |                                     |  |  |
| 4.7  | A         | 790D475X(1)010A2(2)        | 1.0                                 | 6                                   | 4.0  |  |
| <b>15</b>  | <b>A</b>  | <b>790D156X(1)010A2(2)</b> | <b>1.5</b>                          | <b>6</b>                            | <b>2.5</b>   |  |
| 33   | B         | 790D336X(1)010B2(2)        | 3.3                                 | 6                                   | 1.3  |  |
| <b>47</b>  | <b>B</b>  | <b>790D476X(1)010B2(2)</b> | <b>4.7</b>                          | <b>6</b>                            | <b>1.4</b>   |  |
| <b>68</b>  | <b>B</b>  | <b>790D686X(1)010B2(2)</b> | <b>6.8</b>                          | <b>6</b>                            | <b>1.3</b>   |  |
| 100  | C         | 790D107X(1)010C2(2)        | 10.0                                | 6                                   | 0.6  |  |
| <b>150</b>   | <b>C</b>  | <b>790D157X(1)010C2(2)</b> | <b>15.0</b>                         | <b>6</b>                            | <b>0.6</b>   |  |
| 220  | D         | 790D227X(1)010D2(2)        | 22.0                                | 8                                   | 0.4  |  |
| <b><math>U_R = 16 V_{DC}</math> AT +85 °C, SURGE = 20 V; <math>U_C = 10 V_{DC}</math> AT +125 °C, SURGE = 13 V</b> |           |                            |                                     |                                     |  |  |
| 2.2  | A         | 790D225X(1)016A2(2)        | 1.0                                 | 6                                   | 5.5  |  |
| 3.3  | A         | 790D335X(1)016A2(2)        | 1.0                                 | 6                                   | 4.4  |  |
| <b>10</b>  | <b>A</b>  | <b>790D106X(1)016A2(2)</b> | <b>1.6</b>                          | <b>6</b>                            | <b>2.7</b>   |  |
| 15   | B         | 790D156X(1)016B2(2)        | 2.4                                 | 6                                   | 1.6  |  |
| 22   | B         | 790D226X(1)016B2(2)        | 3.5                                 | 6                                   | 1.3  |  |
| <b>33</b>  | <b>B</b>  | <b>790D336X(1)016B2(2)</b> | <b>5.2</b>                          | <b>6</b>                            | <b>1.6</b>   |  |
| 47   | C         | 790D476X(1)016C2(2)        | 7.5                                 | 6                                   | 0.8  |  |
| 68   | C         | 790D686X(1)016C2(2)        | 10.8                                | 6                                   | 0.6  |  |
| <b>100</b>   | <b>C</b>  | <b>790D107X(1)016C2(2)</b> | <b>16.0</b>                         | <b>6</b>                            | <b>0.7</b>   |  |
| 100  | D         | 790D107X(1)016D2(2)        | 16.0                                | 6                                   | 0.5  |  |
| 150  | D         | 790D157X(1)016D2(2)        | 24.0                                | 8                                   | 0.4  |  |
| <b><math>U_R = 20 V_{DC}</math> AT +85 °C, SURGE = 26 V; <math>U_C = 13 V_{DC}</math> AT +125 °C, SURGE = 16 V</b> |           |                            |                                     |                                     |  |  |
| 2.2  | A         | 790D225X(1)020A2(2)        | 1.0                                 | 6                                   | 5.5  |  |
| <b>6.8</b>   | <b>A</b>  | <b>790D685X(1)020A2(2)</b> | <b>1.3</b>                          | <b>6</b>                            | <b>3.5</b>   |  |
| 15   | B         | 790D156X(1)020B2(2)        | 3.0                                 | 6                                   | 1.5  |  |
| <b>22</b>  | <b>B</b>  | <b>790D226X(1)020B2(2)</b> | <b>4.4</b>                          | <b>6</b>                            | <b>2.1</b>   |  |
| 47   | C         | 790D476X(1)020C2(2)        | 9.4                                 | 6                                   | 0.7  |  |
| <b>68</b>  | <b>C</b>  | <b>790D686X(1)020C2(2)</b> | <b>13.6</b>                         | <b>6</b>                            | <b>0.8</b>   |  |
| 100  | D         | 790D107X(1)020D2(2)        | 20.0                                | 6                                   | 0.7  |  |
| <b><math>U_R = 25 V_{DC}</math> AT +85 °C, SURGE = 32 V; <math>U_C = 16 V_{DC}</math> AT +125 °C, SURGE = 20 V</b> |           |                            |                                     |                                     |  |  |
| 1.5  | A         | 790D155X(1)025A2(2)        | 1.0                                 | 6                                   | 6.0  |  |
| <b>4.7</b>   | <b>A</b>  | <b>790D475X(1)025A2(2)</b> | <b>1.1</b>                          | <b>6</b>                            | <b>4.5</b>   |  |
| 10   | B         | 790D106X(1)025B2(2)        | 2.5                                 | 6                                   | 1.6  |  |
| <b>15</b>  | <b>B</b>  | <b>790D156X(1)025B2(2)</b> | <b>3.7</b>                          | <b>6</b>                            | <b>2.4</b>   |  |
| <b>22</b>  | <b>B</b>  | <b>790D226X(1)025B2(2)</b> | <b>5.5</b>                          | <b>6</b>                            | <b>2.1</b>   |  |
| 33   | C         | 790D336X(1)025C2(2)        | 8.2                                 | 6                                   | 0.8  |  |
| 47   | D         | 790D476X(1)025D2(2)        | 11.8                                | 6                                   | 1.0  |  |
| <b><math>U_R = 35 V_{DC}</math> AT +85 °C, SURGE = 45 V; <math>U_C = 23 V_{DC}</math> AT +125 °C, SURGE = 29 V</b> |           |                            |                                     |                                     |  |  |
| <b>3.3</b>   | <b>A</b>  | <b>790D335X(1)035A2(2)</b> | <b>1.2</b>                          | <b>6</b>                            | <b>6.0</b>   |  |
| <b>10</b>  | <b>B</b>  | <b>790D106X(1)035B2(2)</b> | <b>3.5</b>                          | <b>6</b>                            | <b>2.6</b>   |  |
| <b>33</b>  | <b>C</b>  | <b>790D336X(1)035C2(2)</b> | <b>11.6</b>                         | <b>6</b>                            | <b>1.3</b>   |  |

**Notes**

- Part number definitions:
  - Insert 0 for  $\pm 20\%$  tolerance or 9 for  $\pm 10\%$
  - See Ordering Information, packaging code
- Extended ratings in bold print



| STANDARD RATINGS / EXTENDED RATINGS  |           |                     |                                     |                                     |  |
|--|-----------|---------------------|-------------------------------------|-------------------------------------|--|
| CAPACITANCE<br>$C_R$ ( $\mu$ F)  | CASE CODE | PART NUMBER         | MAX. DCL<br>AT +25 °C<br>( $\mu$ A) | MAX. DF<br>120 Hz, AT +25 °C<br>(%) | MAX. IMPEDANCE<br>100 kHz, AT +25 °C<br>( $\Omega$ ) |
| <b><math>U_R = 40 V_{DC}</math> AT +85 °C, SURGE = 52 V; <math>U_C = 25 V_{DC}</math> AT +125 °C, SURGE = 32 V</b> |           |                     |                                     |                                     |  |
| 0.10   | A         | 790D104X(1)040A2(2) | 1.0                                 | 6                                   | 30.0   |
| 0.15   | A         | 790D154X(1)040A2(2) | 1.0                                 | 6                                   | 24.0   |
| 0.22   | A         | 790D224X(1)040A2(2) | 1.0                                 | 6                                   | 18.0   |
| 0.33   | A         | 790D334X(1)040A2(2) | 1.0                                 | 6                                   | 14.0   |
| 0.47   | A         | 790D474X(1)040A2(2) | 1.0                                 | 6                                   | 11.0   |
| 1.0  | A         | 790D105X(1)040A2(2) | 1.0                                 | 6                                   | 6.5  |
| 1.5  | B         | 790D155X(1)040B2(2) | 1.0                                 | 6                                   | 5.2  |
| 2.2  | B         | 790D225X(1)040B2(2) | 1.0                                 | 6                                   | 4.0  |
| 3.3  | A         | 790D335X(1)040A2(2) | 1.3                                 | 6                                   | 2.8  |
| 3.3  | B         | 790D335X(1)040B2(2) | 1.3                                 | 6                                   | 2.8  |
| 4.7  | B         | 790D475X(1)040B2(2) | 1.8                                 | 6                                   | 2.0  |
| 6.8  | B         | 790D685X(1)040B2(2) | 2.7                                 | 6                                   | 1.6  |
| 10   | C         | 790D106X(1)040C2(2) | 4.0                                 | 6                                   | 1.3  |
| 15   | C         | 790D156X(1)040C2(2) | 6.0                                 | 6                                   | 1.0  |
| 22   | C         | 790D226X(1)040C2(2) | 8.8                                 | 6                                   | 0.8  |
| 33   | D         | 790D336X(1)040D2(2) | 13.2                                | 6                                   | 0.6  |
| 47   | D         | 790D476X(1)040D2(2) | 18.8                                | 6                                   | 0.5  |
| <b><math>U_R = 50 V_{DC}</math> AT +85 °C, SURGE = 65 V; <math>U_C = 32 V_{DC}</math> AT +125 °C, SURGE = 41 V</b> |           |                     |                                     |                                     |  |
| 0.10   | A         | 790D104X(1)050A2(2) | 1.0                                 | 6                                   | 30   |
| 0.15   | A         | 790D154X(1)050A2(2) | 1.0                                 | 6                                   | 24   |
| 0.22   | A         | 790D224X(1)050A2(2) | 1.0                                 | 6                                   | 18   |
| 0.68   | A         | 790D684X(1)050A2(2) | 1.0                                 | 6                                   | 8.0  |
| 1.0  | A         | 790D105X(1)050A2(2) | 1.0                                 | 6                                   | 6.5  |
| 1.0  | B         | 790D105X(1)050B2(2) | 1.0                                 | 6                                   | 6.5  |
| 1.5  | B         | 790D155X(1)050B2(2) | 1.0                                 | 6                                   | 5.2  |
| 2.2  | B         | 790D225X(1)050B2(2) | 1.1                                 | 6                                   | 4.0  |
| 3.3  | B         | 790D335X(1)050B2(2) | 1.6                                 | 6                                   | 2.8  |
| 4.7  | B         | 790D475X(1)050B2(2) | 2.3                                 | 6                                   | 2.0  |
| 6.8  | C         | 790D685X(1)050C2(2) | 3.4                                 | 6                                   | 1.6  |
| 10   | C         | 790D106X(1)050C2(2) | 5.0                                 | 6                                   | 1.3  |
| 15   | C         | 790D156X(1)050C2(2) | 7.5                                 | 6                                   | 1.0  |


**Notes**

- Part number definitions:
  - Insert 0 for  $\pm 20$  % tolerance or 9 for  $\pm 10$  %
  - See Ordering Information, packaging code
- Extended ratings in bold print




MAXIMUM PERMISSIBLE RIPPLE VOLTAGE AT +25 °C


CASE SIZE "A"

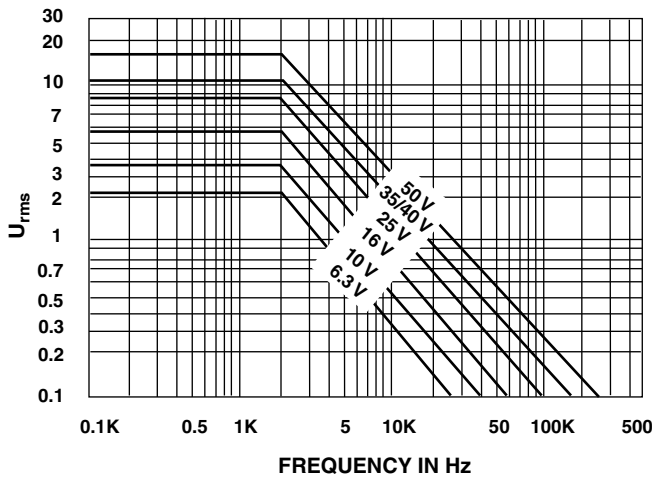


CASE SIZE "B"

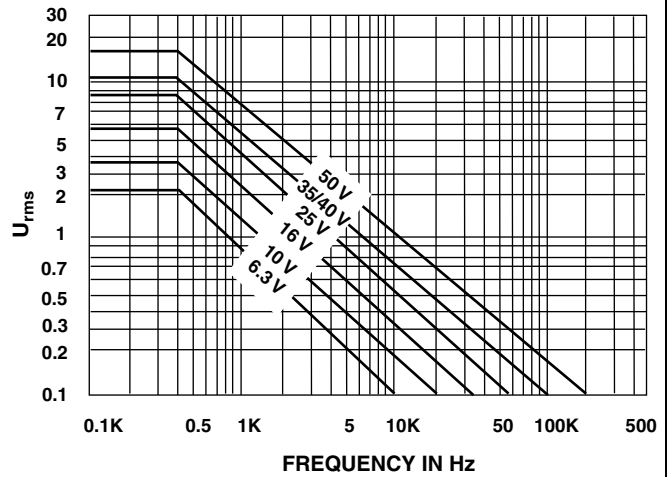



CASE SIZE "C"

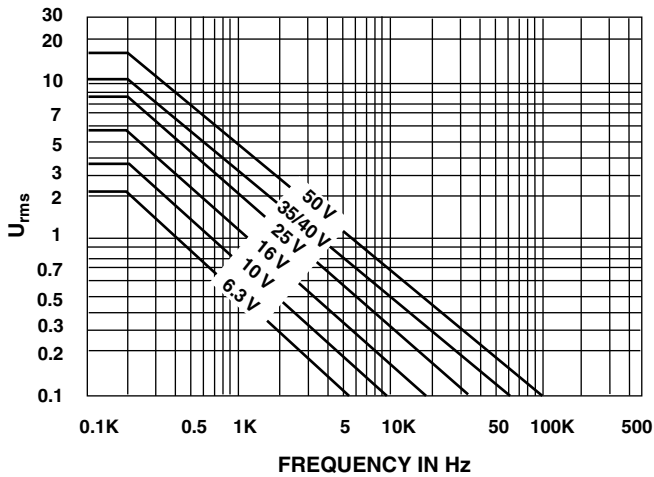

CASE SIZE "D"

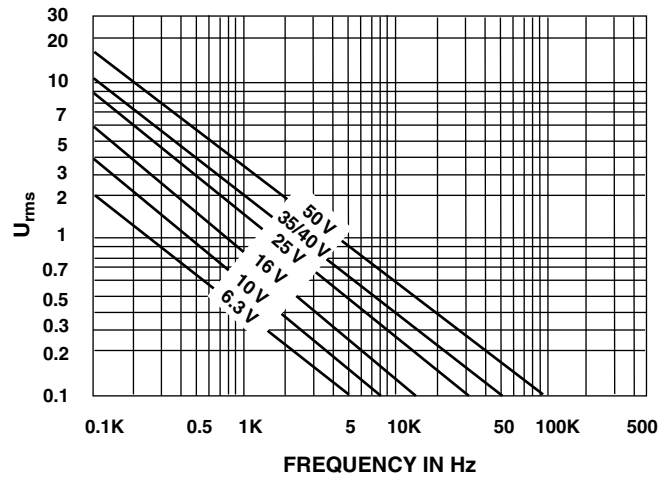

TYPICAL CURVES OF IMPEDANCE VS FREQUENCY

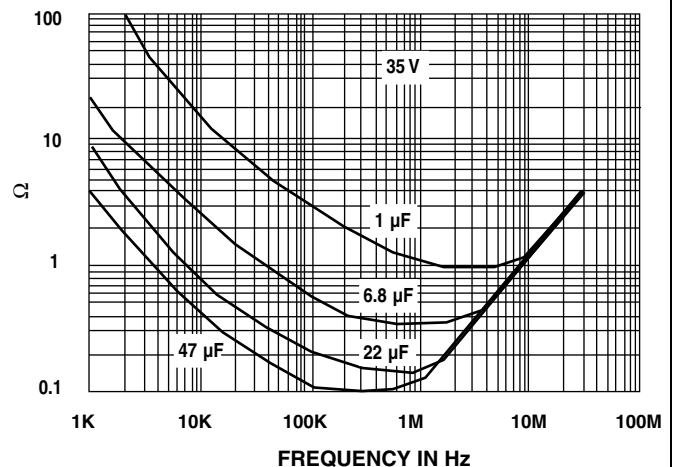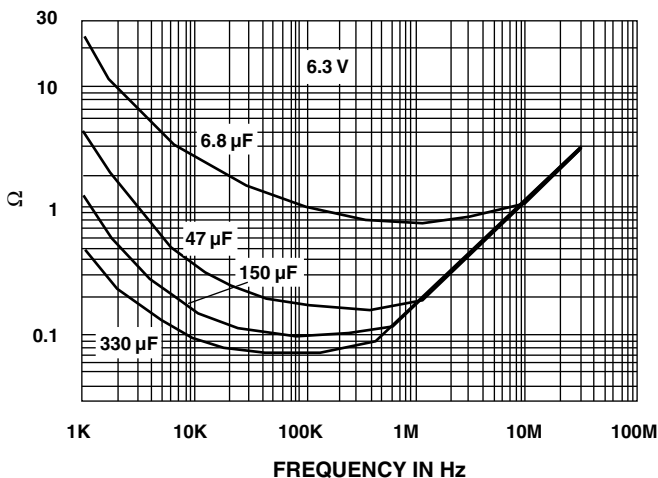




| PACKAGING QUANTITIES |               |      |      |
|----------------------|---------------|------|------|
| CASE CODE            | TAPE AND REEL | AMMO | BULK |
| A                    | 1000          | 1000 | 500  |
| B                    | 1000          | 1000 | 250  |
| C                    | 300           | 300  | 100  |
| D                    | 200           | 200  | 50   |


## PERFORMANCE CHARACTERISTICS

- Operating Temperature:** -55 °C to +85 °C with rated voltage  $U_R$  applied. +85 °C to 125 °C with linear voltage derating to category voltage  $U_C$  (see general information) applied.
- Capacitance and Tolerance:** capacitance measured at 100 Hz and +25 °C shall be within the specified tolerance limits of the nominal rating.
- Reverse Voltage:** 15 % of rated voltage at +25 °C  
5 % of rated voltage at +85 °C
- Surge Voltage:** 130 % of  $U_R$  at +85 °C  
130 % of  $U_C$  at +125 °C
- Impedance at 100 kHz:** measured at +20 °C  $\pm$  5 °C, impedance shall not exceed the values listed in datasheet.
- Stability at low and high temperatures:** capacitance change with temperature, dissipation factor and DC leakage current shall not exceed the limits of the following table.
- Life Test:** 2000 h at +85 °C with rated voltage applied  
2000 h at +125 °C with category voltage applied  
 $\Delta C/C \leq 10$  % of initial value  
 $IL \leq 1.25$  initial limit  
 $DF \leq$  initial limit
- Humidity Test:** 56 days at +40 °C, 90 % relative humidity  
 $\Delta C/C \leq 8$  % of initial value  
 $IL \leq$  initial limit  
 $DF \leq$  initial limit
- Charge and Discharge Test:**  
1 million cycles at +85 °C,  
0.5 s charge at  $U_R$   
0.5 s discharge  
Series resistance < 0.5  $\Omega$   
 $\Delta C/C \leq 5$  % of initial value  
 $IL \leq$  initial limit  
 $DF \leq$  initial limit
- Marking:**  
Top: Rating and polarity  
Front: Type, date code, Vishay identification

| TEMP.   | CAPACITANCE CHANGE<br>$C_R U_R \leq 1900$<br>$C_R U_R > 1900$ | DISSIPATION FACTOR<br>$I_L$ | LEAKAGE CURRENT  |
|---------|---|-----------------------------|--|
| -55 °C  | -10 %   | 9 %                         | -  |
|         |   | 11 %                        |  |
| +25 °C  | -   | 6 %                         | 0.01 $C_R \times U_R$ or<br>1 $\mu A$ whichever<br>is greater        |
|         |   | 8 %                         |  |
| +85 °C  | +12 %   | 9 %                         | 0.1 $C_R \times U_R$ or<br>10 $\mu A$ whichever<br>is greater        |
|         |   | 11 %                        |  |
| +125 °C | +15 %   | 12 %                        | 0.125 $C_R \times U_R$ or<br>12.5 $\mu A$<br>whichever<br>is greater |
|         |   | 14 %                        |  |

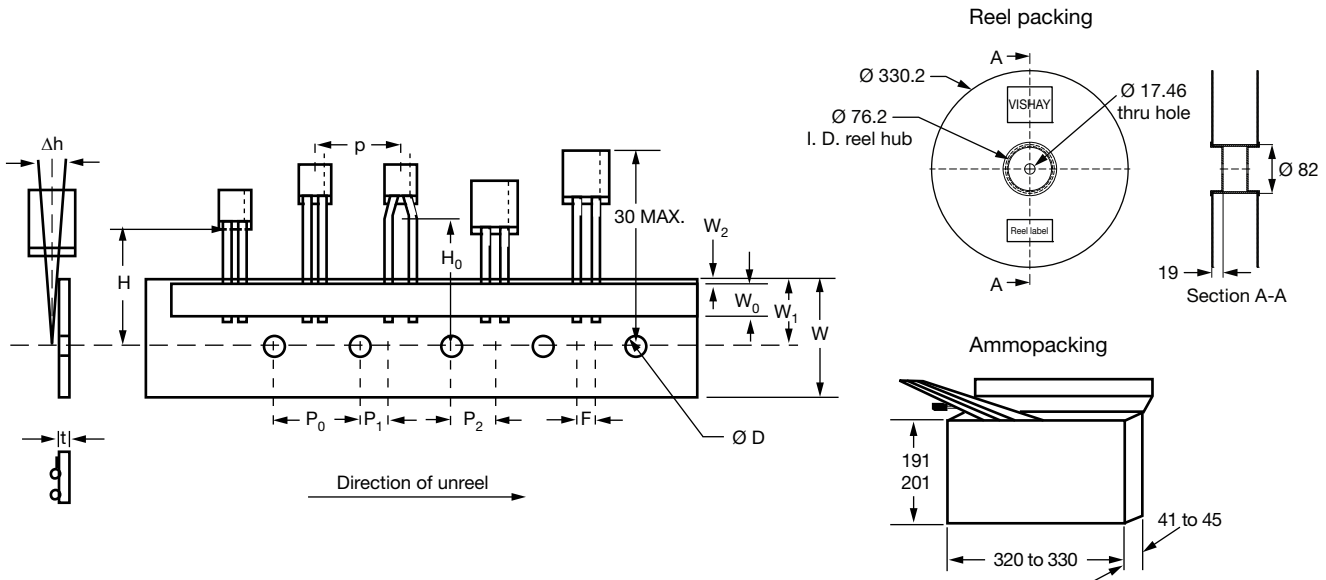**TAPE AND REEL PACKING (Case A and B - meets IEC 286-2)**


| DESIGNATIONS                    | SYMBOL         | DIMENSIONS (mm)                  |                                |                                |
|---------------------------------|----------------|----------------------------------|--------------------------------|--------------------------------|
| Pitch of component              | P              | 12.7 ± 1.0                       |                                |                                |
| Feed hole pitch                 | P <sub>0</sub> | 12.7 ± 0.3                       |                                |                                |
| Tape width                      | W              | 18 (+ 1/- 0.5)                   |                                |                                |
| Hold down tape width            | W <sub>0</sub> | 12                               |                                |                                |
| Hole position                   | W <sub>1</sub> | 9 (+ 0.75/-0.5)                  |                                |                                |
| Hold down tape position         | W <sub>2</sub> | 0 (+ 3/-0)                       |                                |                                |
| Feed hole diameter              | D <sub>0</sub> | 4.0 ± 0.3                        |                                |                                |
| Tape thickness                  | T              | 0.5 ± 0.2                        |                                |                                |
| Component alignment             | Δh             | 0 ± 2                            |                                |                                |
| Lead clinch height              | H <sub>0</sub> | 16.0 ± 0.5                       |                                |                                |
| Hole center to component center | P <sub>2</sub> | 6.35 ± 1.3                       |                                |                                |
| Lead wire spacing               | F              | <b>CASE A</b><br>2.5 + 0.6/- 0.1 | <b>CASE A</b><br>5 + 0.6/- 0.1 | <b>CASE B</b><br>5 + 0.6/- 0.1 |
| Feed hole center to wire center | P <sub>1</sub> | 5.1 ± 0.7                        | 3.85 ± 0.7                     | 3.85 ± 0.7                     |
| Reel pack options               | H = 16.5       | X                                | Z                              | X                              |
|                                 | H = 18.5       | Y                                |                                | Y                              |
| Ampmpack options                | H = 16.5       | G                                | I                              | G                              |
|                                 | H = 18.5       | H                                |                                | H                              |

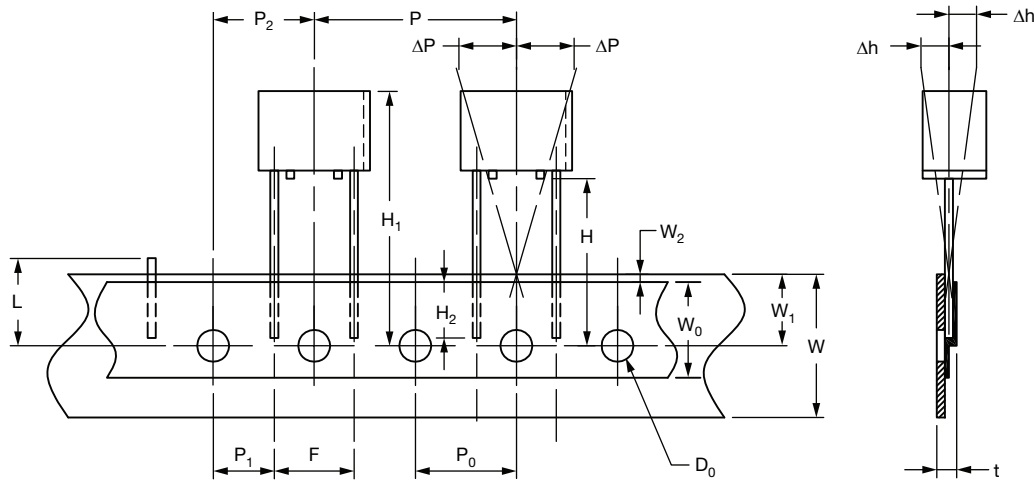**TAPE AND REEL PACKING (Case C and D)**


| DESIGNATIONS                            | SYMBOL         | DIMENSIONS (mm)      |                    |
|---|----------------|----------------------|--------------------|
| Pitch of component                      | P              | 25.4 ± 1.0           |                    |
| Feed hole pitch                         | P <sub>0</sub> | 12.7 ± 0.3           |                    |
| Tape width                              | W              | 18.0 (+ 1/- 0.5)     |                    |
| Hold down tape width                    | W <sub>0</sub> | 12                   |                    |
| Hole position                           | W <sub>1</sub> | 9.0 (+ 0.75/- 0.5)   |                    |
| Hold down tape position                 | W <sub>2</sub> | 0 (+ 3/- 0)          |                    |
| Maximum height of components            | H <sub>1</sub> | 32 max.              |                    |
| Tolerance of positioning parts sideways | ΔP             | 0 ± 1.0              |                    |
| Feed hole diameter                      | D <sub>0</sub> | 4.0 ± 0.3            |                    |
| Tape thickness                          | t              | 0.5 ± 0.2            |                    |
| Component alignment                     | Δh             | 0 ± 2                |                    |
| Cut out length                          | L              | 11 max.              |                    |
| Lead wire spacing                       | F              | 10.16 + 0.6/- 0.1    |                    |
| Feed hole center to wire center         | P <sub>1</sub> | 7.62 ± 0.7           |                    |
| Hole center to component center         | P <sub>2</sub> | 12.7 ± 1.0           |                    |
| Length of leads under adhesive tape     | H <sub>2</sub> | 5.0 min. to 9.0 max. |                    |
| Reel pack options                       | H = 16.5       | <b>CASE C</b><br>X   | <b>CASE D</b><br>X |
|   | H = 18.5       | Y                    | Y                  |
| Ammopack options                        | H = 16.5       | G                    | G                  |
|   | H = 18.5       | H                    | H                  |

| PRODUCT INFORMATION  |  |
|--|--|
| Quick Reference Guide  | <a href="http://www.vishay.com/doc?40037">www.vishay.com/doc?40037</a> |
| Selector Guide   | <a href="http://www.vishay.com/doc?49054">www.vishay.com/doc?49054</a> |
| Parameter Comparison Guide   | <a href="http://www.vishay.com/doc?40033">www.vishay.com/doc?40033</a> |
| Mounting of Through-Hole Components  | <a href="http://www.vishay.com/doc?40108">www.vishay.com/doc?40108</a> |
| Frequently Asked Questions   | <a href="http://www.vishay.com/doc?40110">www.vishay.com/doc?40110</a> |
| Solid Tantalum Capacitors (With MnO <sub>2</sub> Electrolyte) Voltage Derating | <a href="http://www.vishay.com/doc?40246">www.vishay.com/doc?40246</a> |





## **Disclaimer**

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.