


DESIGNED FOR USE WITH RG55/U, 142, 223, 400	
CABLE ENTRY DIAMETER MINIMUM	
CONTACT	.040
SLEEVE	.119
DIELECTRIC	.040

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
03 <sub>3</sub>	REVISED PER ECN 95-0115	3/15/95	<i>M.M.</i>

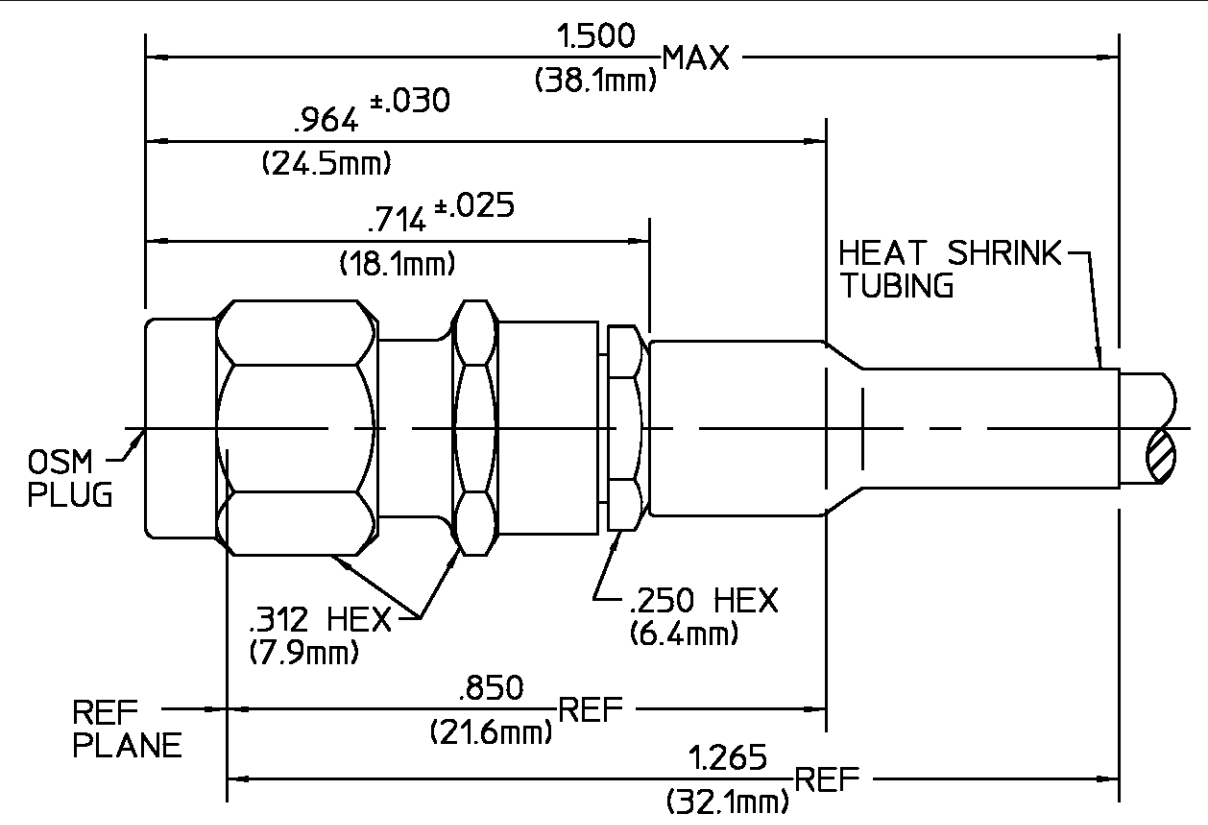

HOUSING	STAINLESS STEEL PER ASTM-A484 AND ASTM- A582, TYPE 303	PASSIVATED PER QQ-P-35
COUPLING NUT		
CLAMP NUT		
SLEEVE		
DIELECTRIC	NYLON	N/A
DIELECTRIC	TFE FLUOROCARBON PER ASTM-D-1457	N/A
CENTER CONTACT	BERYLLIUM COPPER PER ASTM B 196, ALLOY C17300, CONDITION H	GOLD PLATE PER MIL-G-45204
RETAINING RING	BERYLLIUM COPPER PER ASTM B 194, ALLOY C17200, CONDITION H	N/A
GASKET	SILICONE RUBBER PER ZZ-R-765	N/A
SHRINK TUBING	HEAT SHRINKABLE POLYOLEFIN COMPOUND MIL-I-23053/4	N/A
FERRULE	COPPER OR BRASS ALLOY ROCKWELL F65 MAXIMUM	GOLD PLATE PER MIL-G-45204

ELECTRICAL	MECHANICAL	ENVIRONMENTAL
Nominal Impedance (Ohms) <u>50</u>	Interface Dimensions MIL-STD-348A Fig. 310-1	Temperature Rating -65°C *
Frequency Range (GHz) <u>0 *</u>	Recommended Mating Torque <u>7-10 IN-Lbs</u>	Vibration MIL-STD-202, Method 204, Condition D
Volt Rating (VRMS MAX) <u>335</u>	Mating Characteristics: Insertion (MAX Lbs) <u>3.0</u>	Shock MIL-STD-202, Method 213, Condition I
VSWR <u>1.15 ±.01(f GHz)</u>	Withdrawal (MIN Oz) <u>1.0</u>	Thermal Cycling MIL-STD-202, Method 107, Condition B Except High Temp Shall Be 85°C (High Temp Shall Be 200°C When Used With 200°C Cables Per MIL-C-17)
Insertion Loss (dB MAX) <u>.06(f√GHz)</u>	Connector Engagement and Disengagement (In-Lbs MAX) <u>2.0</u>	Moisture Resistance MIL-STD-202, Method 106
RF Leakage (dB) <u>-60</u>	Center Contact Captivation: Axial <u>6.0</u>	Corrosion MIL-STD-202, Method 101, Condition B
Corona, 70 Ft (VRMS MIN) <u>250</u>	Radial <u>N/A</u>	
Dielectric Withstanding Voltage (VRMS MIN) <u>1,000</u>	Cable Retention Axial Lbs <u>40 Min</u>	
Contact Resistance (Milliohms MAX) Center Contact <u>3.0</u>	Torque <u>N/A</u>	
Outer Contact <u>2.0</u>	Weight (Grams) <u>5.0</u>	
Cable To Housing (Milliohms Max) <u>0.5</u>	Hermetic Seal <u>N/A</u>	
RF High Potential (VRMS MIN @ 5 MHz) <u>670</u>		
I.R. (Megohms) <u>5,000</u>		

COMPONENT	MATERIAL	FINISH
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCE ON		
FRAC.	DEC.	ANGLES
± 1/64	±.005	± °
DRAWN BY DRE DATE 10-15-76		
CHECKED BY RBJ 4-07-77		
APP'D BY RMF 4-07-77		
These drawings and specifications are the property of Omni Spectra Incorporated and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of item(s) without written permission.		
USE ASSY PROCEDURE  408-04814 NO. AP. (20-050)		TITLE OSM STRAIGHT CABLE PLUG CRIMP ATTACHMENT
SIZE B	CODE IDENT NO. 26805	2031-5011-02
SCALE 5:1		REV 03 <sub>3</sub>
		SHEET 1 OF 1