


COIL: @ 25°C	
RESISTANCE	9100 OHMS ± 20%
NOMINAL VOLTAGE	110 VDC
MUST OPERATE	51.0 VDC
MUST RELEASE	5.56 VDC

ENVIRONMENT:	
VIBRATION	10 CPS TO 2000 CPS @ 20 g's
SHOCK	100 g's 6 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C

NOTES: \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_

CUSTOMER DATA SHEET

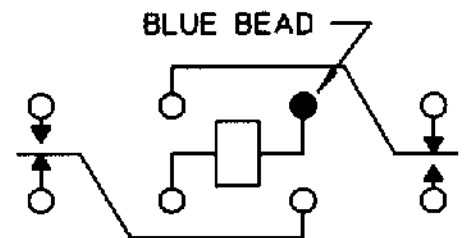

CONTACT RATING:	LOW LEVEL TO
	3 AMPS 28 VDC RESISTIVE
	100,000 OPERATIONS

DR. R.B. 8/29/94 CK. 3/29/94

**COMMUNICATIONS INSTRUMENTS, INC.**

CUST. C.I.I. STD.  
 CUST. NO. \_\_\_\_\_

TYPE 'FW' RELAY

RP7630G10