

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0039300060](#)

Status: **Active**

Overview: [Mini-Fit Jr. Power Connectors](#)

Description: Mini-Fit Jr. Header, Dual Row, Right-Angle, with Snap-in Plastic Peg PCB Lock, 6 Circuits, PA Polyamide Nylon 6/6 94V-0, 2.54µm Matte Tin (Sn) Plating

Documents:

[Drawing \(PDF\)](#)

[3D Model \(PDF\)](#)

[3D Model](#)

[Product Specification PS-45750-001-001 \(PDF\)](#)

[Product Specification PS-5556-001-001 \(PDF\)](#)

[Application Specification AS-5557-001-001 \(PDF\)](#)

[Packaging Specification PK-5569-002-001 \(PDF\)](#)

[Test Summary TS-5556-002-001 \(PDF\)](#)

[Datasheet \(PDF\)](#)

[Symbol Footprint Data SYM-39-30-1060-001 \(PDF\)](#)

[RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA LR19980

UL E29179

General

Product Family PCB Headers

Series [5569](#)

Application Power, Wire-to-Board

Comments Current = 13A max. per circuit when header is mated to a receptacle loaded with [45750](#) Mini-Fit Plus HCS Crimp Terminal Crimped to 16 AWG wire., See Molex Product specification PS-5556-001 for additional current de-rating information.

Overview [Mini-Fit Jr. Power Connectors](#)

Product Name Mini-Fit Jr.

UPC 800753580060

Physical

Breakaway No

Circuits (Loaded) 6

Circuits (maximum) 6

Color - Resin Natural

Durability (mating cycles max) 30

First Mate / Last Break No

Flammability 94V-0

Glow-Wire Capable No

Guide to Mating Part No

Keying to Mating Part None

Lock to Mating Part Yes

Material - Metal Brass

Material - Plating Mating Matte Tin

Material - Plating Termination Matte Tin

Material - Resin Nylon

Net Weight 2.286/g

Number of Rows 2

Orientation Right Angle

PCB Locator Yes

PCB Retention Yes


PCB Thickness - Recommended 1.78mm

Packaging Type Bag

Pitch - Mating Interface 4.20mm

Pitch - Termination Interface 4.20mm

Plating min - Mating 2.540µm

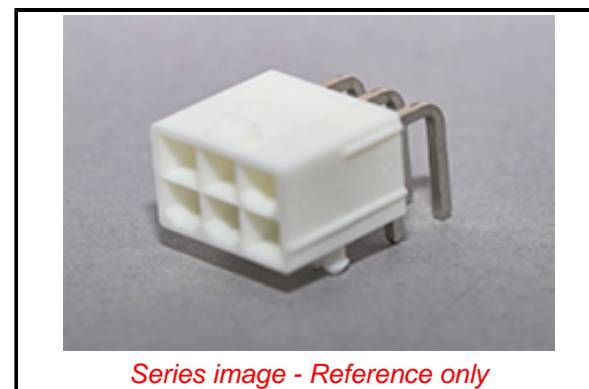

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -

D(2021)4569-DC (8

July 2021)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[5569](#) Series

Mates With

Mini-Fit Jr. Receptacle Housing [5557](#)

Mini-Fit Jr. TPA Cable Assembly [45135](#)

Mini-Fit Jr. Cable Assembly [245135](#) ,

Mini-Fit TPA2 Receptacle Housing [172708](#)

Plating min - Termination	2.540µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Shrouded	Fully
Stackable	No
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-40° to +105°C
Termination Interface: Style	Through Hole

Electrical

Current - Maximum per Contact	13.0A
Voltage - Maximum	600V

Solder Process Data

Duration at Max. Process Temperature (seconds)	005
Lead-free Process Capability	WAVE
Max. Cycles at Max. Process Temperature	001
Process Temperature max. C	240

Material Info

Engineering Number	5569-06A2-210
--------------------	---------------

Reference - Drawing Numbers

Application Specification	AS-5557-001-001
Packaging Specification	PK-5569-002-001
Product Specification	PS-45750-001-001, PS-5556-001-001
Sales Drawing	55690002-SD-000
Symbol/Footprint Data	SYM-39-30-1060-001
Test Summary	TS-5556-002-001

This document was generated on 08/13/2021

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION