




RQG-P | PG thread

Connectors FLEXAquick for ROHRflex corrugated plastic tubings

Plastic connector, quick-type, straight, PG outer thread, integrated snap-in sleeve with sealing, high density

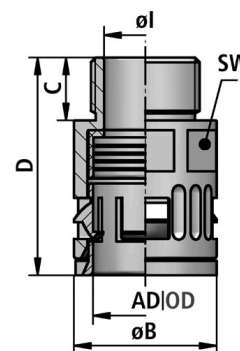

Temperature: -40°C ... +120°C

Material: PA plastics

Protection class [acc. to EN 60529] IP 68 | IP 69K



FLEXA No.	OD [mm]	Colour	Threadtype	ø I [mm]	ø B [mm]	C [mm]	D [mm]	WS [mm]	Weight [kg/100]	PU [pcs.]
5020.026.207	10,0	Black	PG7	7,0	17,0	10,0	32,5	16	0,400	50
5020.027.202	10,0	Black	PG9	7,0	17,0	10,0	32,5	16	0,420	50
5020.027.203	10,0	Black	PG11	7,0	21,0	10,0	32,5	16	0,480	50
5020.027.205	10,0	Black	PG13,5	7,0	23,0	10,0	32,5	16	0,520	25
5020.027.201	13,0	Black	PG7	8,0	20,0	10,0	35,0	18	0,500	50
5020.026.209	13,0	Black	PG9	10,0	20,0	10,0	35,0	18	0,500	50
5020.027.204	13,0	Black	PG11	10,0	21,0	10,0	35,0	18	0,540	50
5020.027.206	13,0	Black	PG13,5	10,0	23,0	10,0	35,0	18	0,600	25
5020.026.211	15,8	Black	PG11	12,5	23,0	10,0	37,0	21	0,700	50
5020.027.207	15,8	Black	PG13,5	12,5	23,0	10,0	37,0	21	0,700	50
5020.027.210	15,8	Black	PG16	12,5	26,5	10,0	37,0	21	0,760	25
5020.026.213	18,5	Black	PG13,5	13,5	26,0	13,0	43,0	24	0,860	50
5020.026.214	18,5	Black	PG16	17,0	25,5	11,0	42,0	24	0,960	25
5020.027.209	21,2	Black	PG13,5	15,5	29,5	10,0	43,5	27	1,200	10
5020.026.216	21,2	Black	PG16	17,0	29,5	13,0	46,0	27	1,200	50
5020.027.208	28,5	Black	PG16	17,0	37,0	12,0	48,5	34	1,800	10
5020.026.221	28,5	Black	PG21	23,5	37,0	12,5	48,5	34	1,680	25
5020.026.229	34,5	Black	PG29	30,0	44,0	14,5	51,0	40	2,360	25
5020.026.236	42,5	Black	PG36	36,0	63,0	17,0	76,0	60	6,000	25
5020.026.248	54,5	Black	PG48	47,5	64,0	17,0	88,0	70	9,200	10
5020.026.007	10,0	Grey	PG7	7,0	17,0	10,0	32,5	16	0,400	50
5020.027.002	10,0	Grey	PG9	7,0	18,5	10,0	32,5	16	0,420	50
5020.027.003	10,0	Grey	PG11	7,0	21,0	10,0	32,5	16	0,480	50
5020.027.005	10,0	Grey	PG13,5	7,0	23,0	10,0	32,5	16	0,520	25
5020.027.001	13,0	Grey	PG7	8,0	20,0	10,0	35,0	18	0,500	50
5020.026.009	13,0	Grey	PG9	10,0	20,0	10,0	35,0	18	0,500	50
5020.027.004	13,0	Grey	PG11	10,0	21,0	10,0	35,0	18	0,540	50
5020.027.006	13,0	Grey	PG13,5	10,0	23,0	10,0	35,0	18	0,600	25



FLEXA No.	OD [mm]	Colour	Threadtype	Ø I [mm]	Ø B [mm]	C [mm]	D [mm]	WS [mm]	Weight [kg/100]	PU [pcs.]
5020.026.011	15,8	Grey	PG11	12,5	23,0	10,0	37,0	21	0,700	50
5020.027.007	15,8	Grey	PG13,5	12,5	23,0	10,0	37,0	21	0,700	50
5020.027.010	15,8	Grey	PG16	12,5	26,5	10,0	37,0	21	0,760	25
5020.026.013	18,5	Grey	PG13,5	13,5	26,0	13,0	43,0	24	0,860	50
5020.026.014	18,5	Grey	PG16	17,0	25,5	11,0	42,0	24	0,960	25
5020.027.009	21,2	Grey	PG13,5	15,5	29,5	10,0	43,5	27	1,200	10
5020.026.016	21,2	Grey	PG16	17,0	29,5	13,0	46,0	27	1,200	50
5020.027.008	28,5	Grey	PG16	17,0	37,0	12,0	48,5	34	1,800	10
5020.026.021	28,5	Grey	PG21	23,5	37,0	12,5	48,5	34	1,680	25
5020.026.029	34,5	Grey	PG29	30,0	44,0	14,5	51,0	40	2,360	25
5020.026.036	42,5	Grey	PG36	36,0	53,0	17,0	76,0	60	6,000	25
5020.026.048	54,5	Grey	PG48	47,5	74,0	17,0	88,0	70	9,200	10

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.