

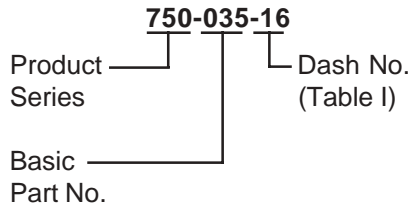


750-035 Type C Series 75 Flexible Metal-Core Conduit

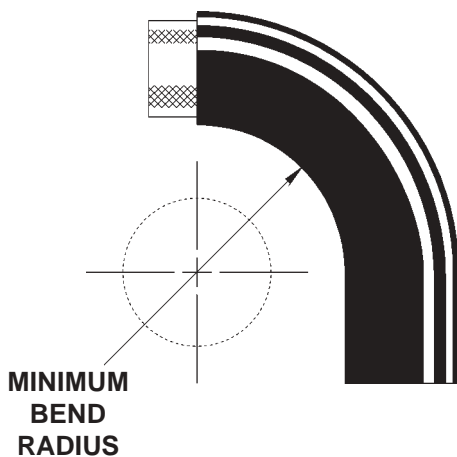

**TYPE
C**
**BRASS CONDUIT
INNER BRONZE BRAID
BRAIDED CENTER FERROUS
EMI SHIELD
BRAIDED OUTER TIN/COPPER
EMI SHIELD
NEOPRENE JACKET ***

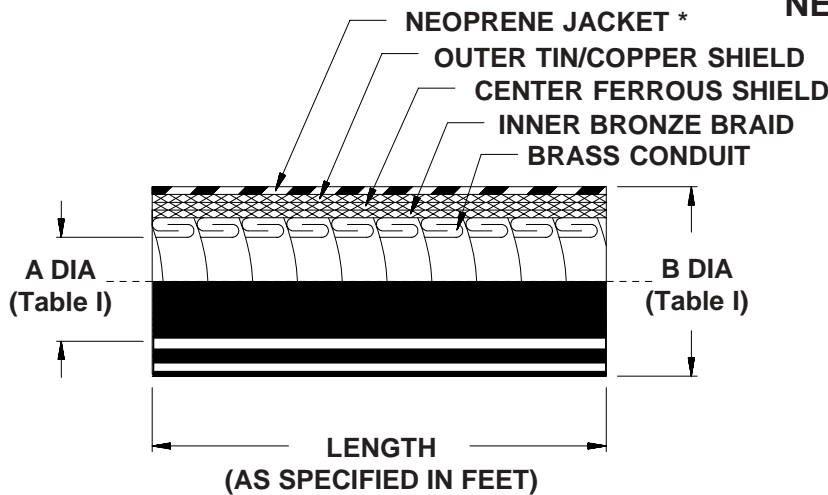

Metric dimensions (mm) are in parentheses.

* For other jacket materials or for conduit without the jacket, consult the factory.

| TABLE I | | | | |
|----------|--------------|--------------|-----------------------|---------|
| DASH NO. | A DIA | B DIA MAX | MINIMUM BEND RADIUS** | |
| 08 | .250 (6.4) | .688 (17.5) | 1.750 | (44.5) |
| 12 | .375 (9.5) | .812 (20.6) | 2.000 | (50.8) |
| 16 | .500 (12.7) | .937 (23.8) | 2.500 | (63.5) |
| 20 | .625 (15.9) | 1.062 (27.0) | 3.000 | (76.2) |
| 24 | .750 (19.1) | 1.203 (30.6) | 3.750 | (95.3) |
| 32 | 1.000 (25.4) | 1.562 (39.7) | 5.000 | (127.0) |
| 40 | 1.250 (31.8) | 1.812 (46.0) | 6.250 | (158.8) |
| 48 | 1.500 (38.1) | 2.062 (52.4) | 7.750 | (196.9) |
| 56 | 1.750 (44.5) | 2.312 (58.7) | 8.500 | (215.9) |
| 64 | 2.000 (50.8) | 2.593 (65.9) | 10.000 | (254.6) |
| 80 | 2.500 (63.5) | 3.093 (78.6) | 12.500 | (317.5) |
| 96 | 3.000 (76.2) | 3.630 (92.2) | 15.000 | (381.0) |

** The minimum bend radius shown for each size is based on Type A construction (see page C-5). For multiple-braided coverings, these minimum bend radii may be increased slightly.