


OGA DIAGONAL: 16.43 [417.43]  
 VA DIAGONAL: 15.75 [400.02]  
 PA DIAGONAL: 14.86 [377.32]





(USB R)  
 EXII-7760UC  
 98-0003-2814-0  
 USB CONTROLLER  
 SOLDER SIDE



ESD CLAMSHELL  
 CASE  
 IS USED WITH ALL  
 NOV. USB AND SER  
 TERMINATIONS.

US NUMBER	TYPE	DIM "A" (TOTAL GLASS TO CONNECTOR)	A/G FINISH	PROD SPEC
98-0003-3189-6	FFC	6.00" [152.40]	AG500	23655
98-0003-3190-4	USB R	6.00" [152.40]	AG500	23655

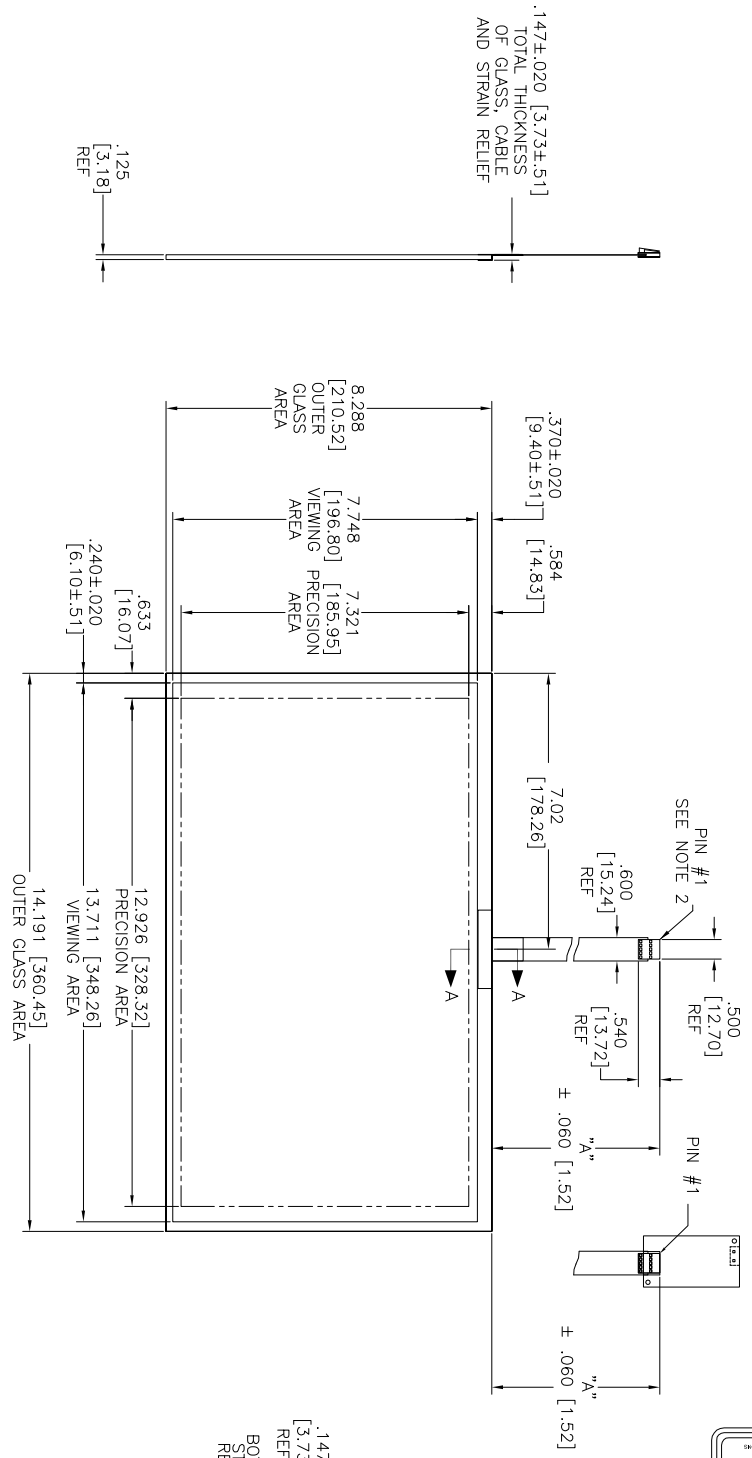

PINOUT	
1	LL
2	UL
3	SHLD
4	UR
5	LR

- NOTES:
1. WEIGHT OF GLASS IN GRAMS: 602±10%
  2. NICOMATIC HOUSING P/N: OLO5
  3. NICOMATIC RECEPTACLES (PINS) MATTE TIN PLATED P/N: 14106-12
  4. HOUSING ORIENTED WITH LATCH DOWN

UNITS	INCHES [MM]
TOLERANCES UNLESS OTHERWISE SPECIFIED	
X	±.03 [ .76]
.XX	±.015 [ .38]
.XXX	±.01 [ .25]
ANGLES	±1°

REV	DATE	BY	CHKD	APP'D
E	2/12	SB		
04	12/09	SB		
03	6/09	SB		

MARKETING DRAWING  
 SCT32NN 15.75" W

DO NOT SCALE DRAWING	SCALE 1 = 1	DRAWN AHJ	12/08	SIZE C	DOCUMENT NO. 36386-MKT	SHEET 1 OF 1	REV E
----------------------	-------------	-----------	-------	--------	------------------------	--------------	-------