

Register to Get **\$10** Shipping Coupon





LOGIN/SIGN UP


HOME COMMUNITY **NEW** FORUM WIKI BLOG PRODUCT LINES ▾

EDUCATION

\$USD

WISH LIST

Modules / LCDs/LEDs/E-ink/Displays / Screens & Displays / Fermion: 2.8" 320x240 IPS TFT LCD Resistive Touchscreen with MicroSD Card Slot (Breakout)

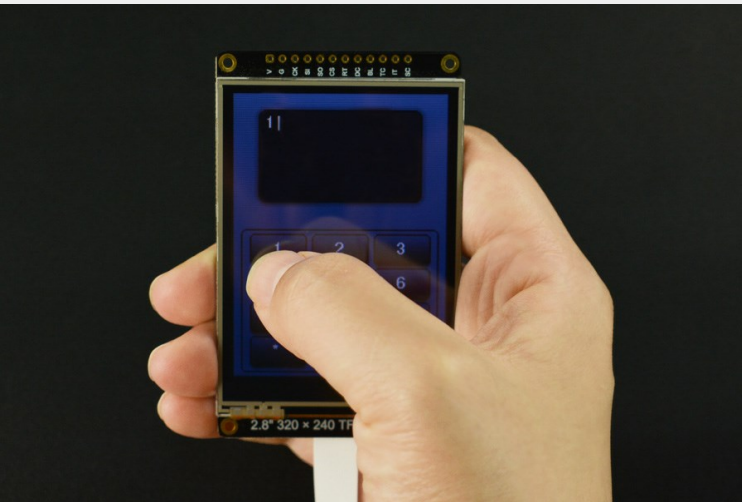

Fermion: 2.8" 320x240 IPS TFT LCD Resistive Touchscreen with MicroSD Card Slot (Breakout)

SKU:DFR0665 Brand:DFRobot Reward Points: 249

Quantity Based

QTY	DISCOUNT
3-4	
5-9	
10+	

* Model:

Quantity: - +

ADD TO CART



Frequently Bought Together

+

+

+

+

=

You have chosen: 0
Total amount:

BUY IT NOW

INTRODUCTION

With 320x240 color pixels, this 2.8" LCD display module adopts the ILI9341 driver chip and integrates XPT2046 that supports resistive touch. The IPS display module adopts SPI(4-line) communication mode, performing excellently in the angle of view(60/60/60/60). It also supports the GDI interface (the GDI interface should be used in conjunction with the main control board with GDI interface). Just plug it in, and you're good to go. The module, featuring high resolution, wide view angle, and simple wiring, can be applied in many display applications: sensor monitoring and warning, controller display, flash or 3D displays, Touch interface, etc.

The 2.8" LCD display module can be operated at 3.3V~5V, and is compatible with multiple main-controllers: UNO, [Leonardo](#), [ESP32](#), [ESP8266](#), [FireBeetle M0](#), etc. Use the GDI interface to work with M0, which could effectively reduce wiring steps. Besides, there is an onboard MicroSD card slot for displaying more pictures.

Note: The product doesn't contain a [MicroSD Card](#). You can click [here](#) to buy one.

FEATURES

- Wide-angle of view
- Resistive Touchscreen
- High Resolution
- GDI Interface, plug, and play
- Onboard MicroSD Card Slot

APPLICATIONS

- Sensor Monitoring and Warning
- Controller Display
- Flash or 3D Display
- Touch Interface

SPECIFICATION

- Operating Voltage: 3.3V-5.5V
- Display Color: 16-bit Color Depth (RGB565)
- Driver Chip: ILI9341
- Touch Chip: XPT2046
- Pixel: 320x240
- Communication Mode: SPI
- Brightness (cd/m2): 300 (TYP)
- Full-screen Consumption: 43.5mA*5V/3.3V
- Operating Temperature: -10°C~+60°C
- Display Area: 57.60x43.20mm/2.27x1.70"
- Module Dimension: 80.00x50.00mm/3.15x1.97"
- Mounting Hole Diameter: 2mm

DOCUMENTS

- [Product Wiki](#)

SHIPPING LIST

- 2.8"320x240 IPS TFT LCD Touchscreen with MicroSD x1
- 2.54-12P Black Single Row Pin Header x1
- FPC0.5-18PIN 10cm Reverse Connection Line x1

REVIEW

FAQ

0 Comments DFRobot Disqus' Privacy Policy Login ▾

Recommend Tweet Share Sort by Best ▾

Start the discussion...

Be the first to comment.

Subscribe Add Disqus to your site Do Not Sell My Data **DISQUS**

Sign up for exclusive offers!

Your email address

Like us on



INFORMATION

- [About Us](#)
- [Warranty](#)
- [Privacy Policy](#)
- [Shipping](#)
- [Payment](#)
- [FAQ](#)

CUSTOMER SERVICE

- [DFRobot Distributors](#)
- [Contact us](#)
- [Site Map](#)

MY ACCOUNT

- [Affiliates](#)
- [Specials](#)
- [Coupon](#)