


M39012/03-0012

REVISIONS	
ISSUE	CHANGES
0	ER 8378 WLA 6 MAR 70
1	CN 8509 A LR 1 MAY 70
2	CN 12437 A JL 18 JUL 73
3	CN 18314 C NM 8 MAY 78
4	CN 23169 E JEP 13 APR 82
5	CN 32243 A LNM 1 JUN 90

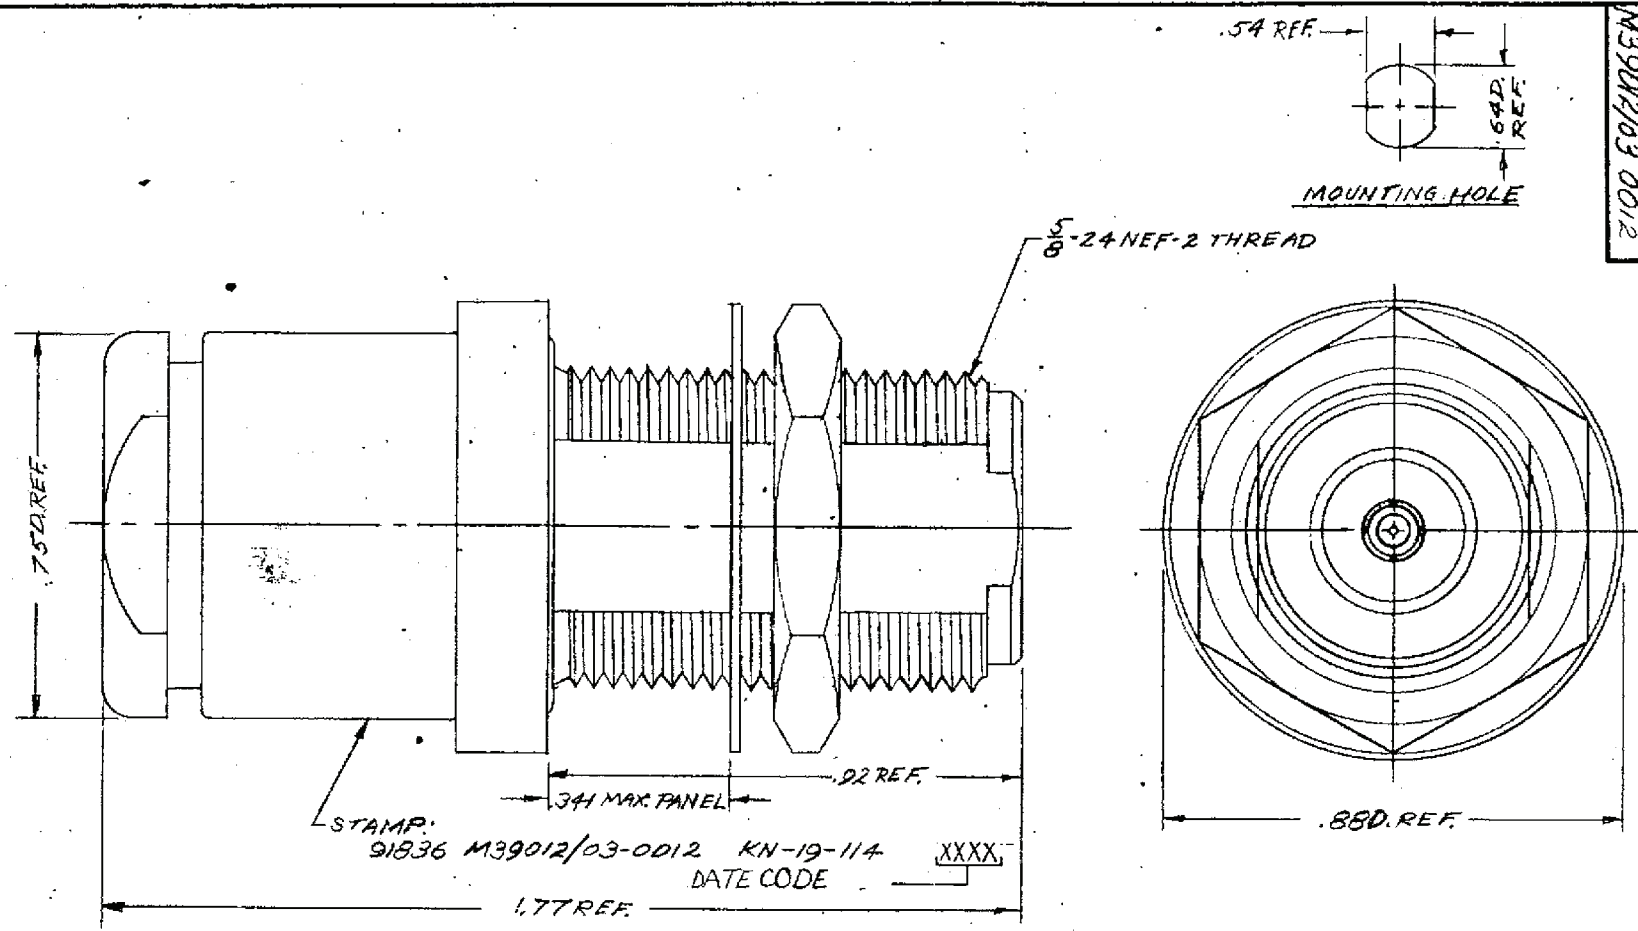

NOTES:
1. FOR USE WITH RG-213, 214, & 225/U CABLE.

KN-19-114	
REF:	SUPERSEDES UG153746
FINISH	
SPEC.	
MATL.	
SPEC.	
BULKHEAD JACK	
DRAWN ORS	DATE 9 APR 70
APPR.	DATE

UNLESS OTHERWISE SPECIFIED:

1. TOLERANCES: FRACTIONS & 2 PLACE DECIMALS ± .010	2. REMOVE ALL BURRS. BREAK SHARP EDGES .005 MAX.
3 PLACE DECIMALS ± .004	ANGLES ± 0° 30'
T. I. R. CONCENTRICITY OF ANY 2 DIAMETERS MAY NOT EXCEED THE SUM OF THEIR TOLERANCES.	3. NO FILLETS PERMITTED.
	4. SURFACE ROUGHNESS 63 MICROINCHES RMS MAX.
	5. ALL DIMENSIONS PRIOR TO PLATING.

ITEM	REQ'D	DESCRIPTION	DRAWING NO.
			M39012/03-0012

KINGS ELECTRONICS
40 MARBLEDALE ROAD
TUCKAHOE, N. Y. 10707