




| ⚠ WARNING | |
|---|---|
|  | <p>ELECTROCUTION HAZARD</p> <p>Disconnect electric power to system at main fuse or circuit breaker box before servicing. Failure to do so could result in death or serious injury.</p> |
|  | <p>FIRE HAZARD</p> <p>Do not exceed transformer ratings. Higher voltage may damage control and could cause personal injury or property damage.</p> |

SPECIFICATIONS:


| | |
|----------------------|---|
| INPUT: | 117 V, 50/60Hz |
| OUTPUT: | 28V CT. SEE SECONDARY CURRENT RATING & VA CAPACITY IN TABLE |
| INSULATION RATING: | CLASS A (105°C) |
| TEMPERATURE RISE: | 65°C RISE ABOVE 40°C AMBIENT |
| DIELECTRIC STRENGTH: | 1500 VRMS |

NOTE:


1. Primary leads Black, #22 AWG.
2. All leads 8" long minimum.

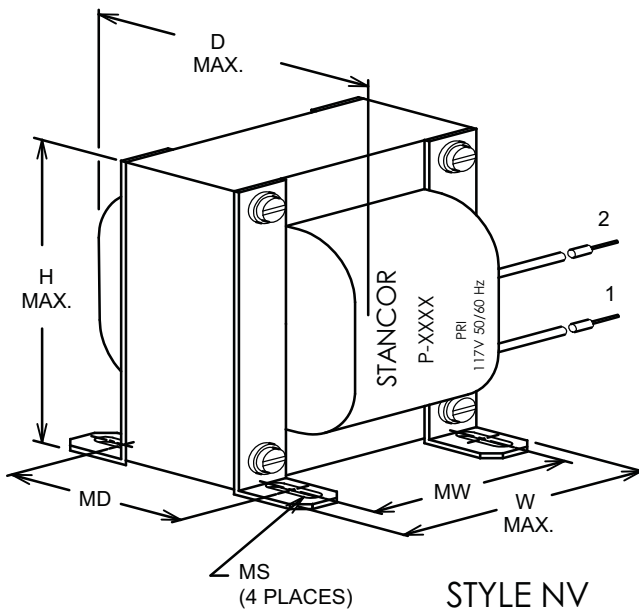

STYLE NV

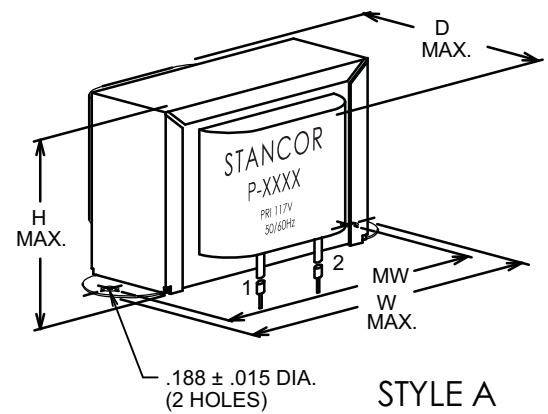

STYLE A

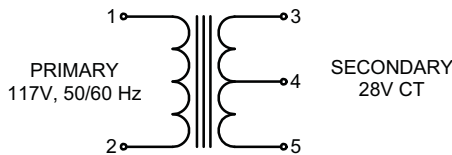

SCHEMATIC DIAGRAM

| STANCOR Part No. | Sec. Curr. | VA Cap. | Sec. Lead Wires | | | | Mtg. Style | Dimensions - Inches | | | | | | Wt. Lbs. |
|------------------|------------|---------|-----------------|-----------|-----|-----|------------|---------------------|------|------|------|------|-------------|----------|
| | | | Color | | | Awg | | H | W | D | MW | MD | MS± .031 | |
| | | | #3 | #4 (C.T.) | #5 | | | | | | | | | |
| P-8601 | .175A | 4.9 | BLU | YEL | BLU | #22 | A | 1.44 | 2.44 | 1.62 | 2.00 | - | - | 0.35 |
| P-8602 | .30A | 8.4 | GRN | YEL | GRN | #22 | A | 1.75 | 2.88 | 1.62 | 2.38 | - | - | 0.60 |
| P-8667 | 1.0A | 28.0 | GRN | YEL | GRN | #22 | A | 2.06 | 3.31 | 2.25 | 2.81 | - | - | 1.40 |
| P-8668 | 2.0A | 56.0 | BLU | YEL | BLU | #22 | NV | 3.13 | 2.56 | 2.50 | 2.00 | 2.19 | .188 X .375 | 2.90 |
| P-8669 | 4.0A | 112.0 | GRN | YEL | GRN | #18 | NV | 4.00 | 3.25 | 3.38 | 2.50 | 2.50 | .188 X .375 | 5.30 |
| P-8670 | 6.0A | 168.0 | GRN | YEL | GRN | #18 | NV | 4.31 | 3.50 | 3.56 | 2.75 | 2.69 | .203 X .500 | 7.00 |