



3x4 Phone-style Matrix Keypad

PRODUCT ID: 1824

OUT OF STOCK

Please enter your details below and we will send you an email when this item is back in stock. You will only be emailed about this product!

YOUR NAME




YOUR EMAIL

NOTIFY ME

ADD TO WISHLIST

DESCRIPTION

TECHNICAL DETAILS




DESCRIPTION

Hey, Jenny, I've got your number! And I'm going to dial 867-5309 into this very nice phone-style matrix keypad. This keypad has 12 buttons, arranged in a telephone-line 3x4 grid. It's made of


Downloaded from Arrow.com, connected to a matrix so you only need 7

microcontroller pins (3-columns and 4-rows) to scan through the pad.

There's a great [Matrix Keypad Arduino library](#) that should work great with this item with minor adjustments. It's basically a sturdier version of our [Membrane 3x4 Matrix Keypad](#) and comes with 7 or 8 header pins pre-soldered on for easy plugging. Starting from the left there are three column pins, and then to the right are the four row pins. If yours has an 8th pin, its not used and you can just leave it disconnected

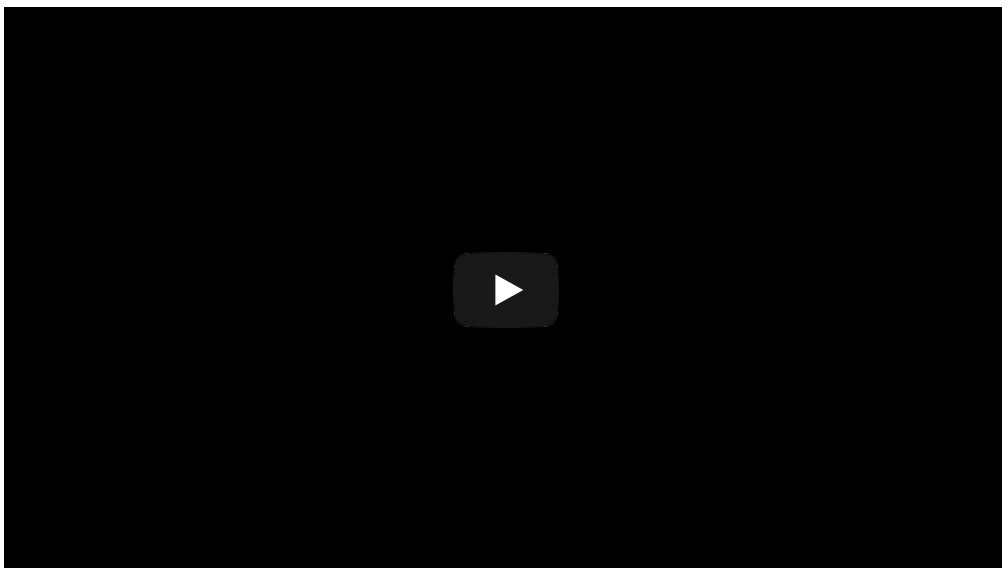

TECHNICAL DETAILS

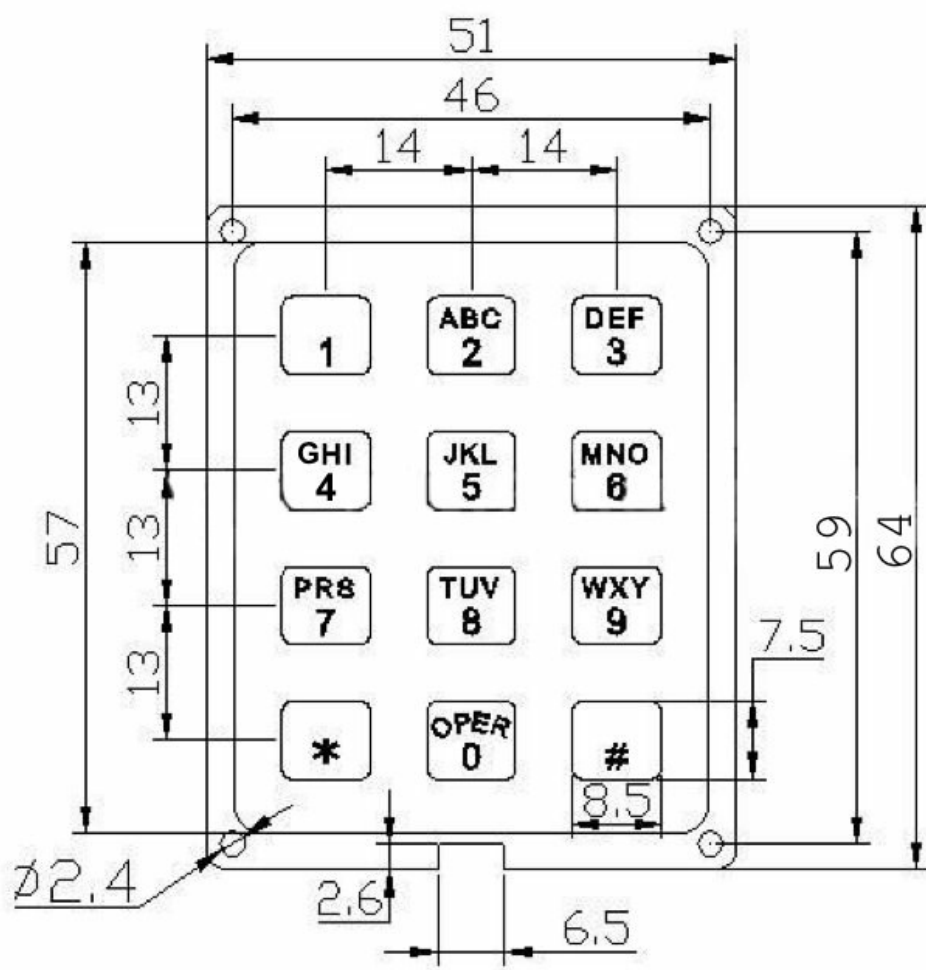

- Force: 160-180g
- Contact Resistance: <100 Ω
- Weight: 23g

we suggest is to change the initialization code in the examples to this:

```
#include "Arduino.h"
#include "Keypad.h"

const byte ROWS = 4; //four rows
const byte COLS = 3; //three columns
char keys[ROWS][COLS] = {
  {'1','2','3'},
  {'4','5','6'},
  {'7','8','9'},
  {'*','0','#'}
};

byte rowPins[ROWS] = {5, 6, 7, 8}; //connect to the row pinouts of the keypad
byte colPins[COLS] = {2, 3, 4}; //connect to the column pinouts of the keypad

Keypad keypad = Keypad( makeKeymap(keys), rowPins, colPins, ROWS, COLS );

void setup(){
  Serial.begin(9600);
}

void loop(){
  char key = keypad.getKey();

  if (key != NO_KEY){
    Serial.println(key);
  }
}
```


This will swap the * and # keys and also let you connect to the Arduino with all the pins in order/in a row starting from digital 2 thru digital 9

LEARN



Mystery Box: NeoMatrix Mk I
Interface of Infinite
Possibilities: Matrix keypad
and NeoSegment display

MAY WE ALSO SUGGEST...



Adafruit Trellis Monochrome




Silicone Elastomer 4x4



Membrane 1x4 Keypad +




Membrane 3x4 Matrix



Membrane LED Keypad +



4x4 Matrix Keypad



3x4 Matrix Keypad

DISTRIBUTORS [EXPAND TO SEE DISTRIBUTORS](#)

- [CONTACT](#)
- [SUPPORT](#)
- [DISTRIBUTORS](#)
- [EDUCATORS](#)
- [JOBS](#)
- [FAQ](#)
- [SHIPPING & RETURNS](#)
- [TERMS OF SERVICE](#)
- [PRIVACY & LEGAL](#)
- [ABOUT US](#)

"Art is I; science is we" - Claude Bernard

ENGINEERED IN NYC Adafruit®



4.9 ★★★★★
Google
Customer Reviews