Dual retriggerable monostable multivibrator with resetRev. 5 — 17 June 2020Product data sheet

1. General description

The 74AHC123A; 74AHCT123A is a dual retriggerable monostable multivibrator with reset. The basic output pulse width is programmed by selection of external components (R_{EXT} and C_{EXT}). Once triggered this basic pulse width may be extended by retriggering either of the edge triggered inputs ($n\overline{A}$ or (nB). By repeating this process, the output pulse period (nQ = HIGH, $n\overline{Q} = LOW$) can be made as long as desired. Alternatively, an output delay can be terminated at any time by a LOW-going edge on input $n\overline{R}D$. Inputs are overvoltage tolerant. This feature allows the use of these devices as translators in mixed voltage environments.

2. Features and benefits

- Wide supply voltage range from 2.0 V to 5.5 V
- · DC triggered from active HIGH or active LOW inputs
- Retriggerable for very long pulses up to 100 % duty factor
- Direct reset terminates output pulse
- Overvoltage tolerant inputs to 5.5 V
- All inputs have a Schmitt-trigger action
- High noise immunity
- Input levels:
 - For 74AHC123A: CMOS level
 - For 74AHCT123A: TTL level
- ESD protection:
 - HBM JESD22-A114E exceeds 2000 V
 - MM JESD22-A115-A exceeds 200 V
 - CDM JESD22-C101C exceeds 1000 V
- Latch-up performance exceeds 100 mA per JESD 78 Class II Level A
- Multiple package options
- Specified from -40 °C to +85 °C and from -40 °C to +125 °C


3. Ordering information

Table 1. Ordering information

Type number	Package			
	Temperature range	Name	Description	Version
74AHC123AD	-40 °C to +125 °C	SO16	plastic small outline package; 16 leads;	SOT109-1
74AHCT123AD			body width 3.9 mm	
74AHC123APW	AHC123APW -40 °C to +125 °C TS		plastic thin shrink small outline package; 16 leads;	SOT403-1
74AHCT123APW			body width 4.4 mm	
74AHC123ABQ	-40 °C to +125 °C	DHVQFN16	plastic dual in-line compatible thermal enhanced	SOT763-1
74AHCT123ABQ			very thin quad flat package; no leads; 16 terminals; body 2.5 × 3.5 × 0.85 mm	


nexperia

4. Functional diagram

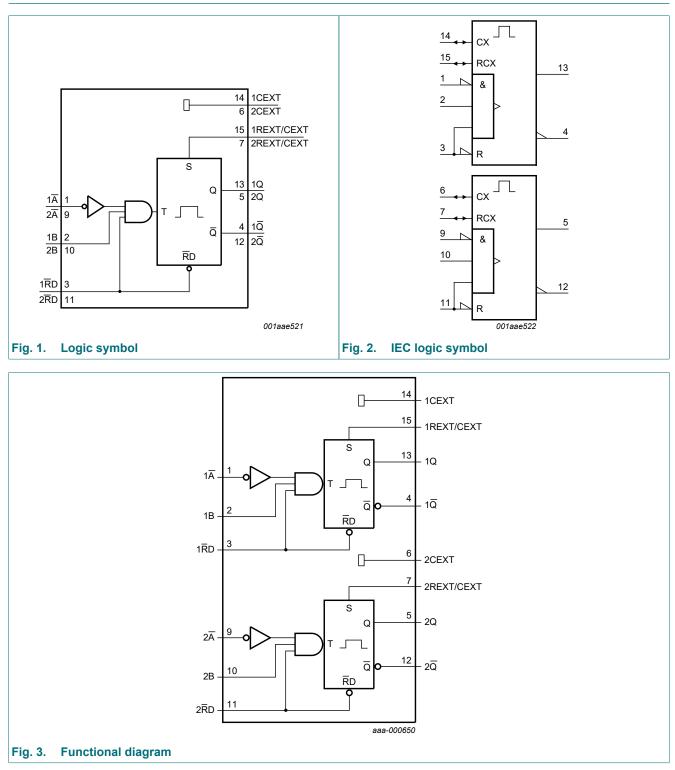


74AHC_AHCT123A

Dual retriggerable monostable multivibrator with reset

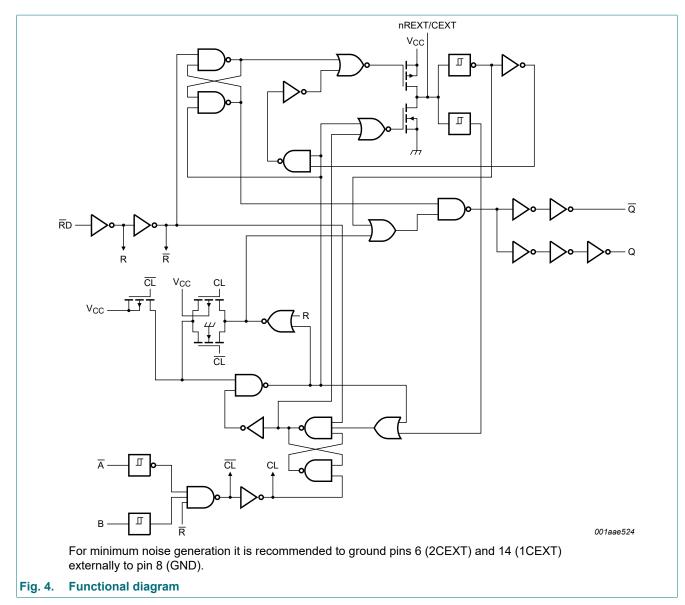

5. Pinning information

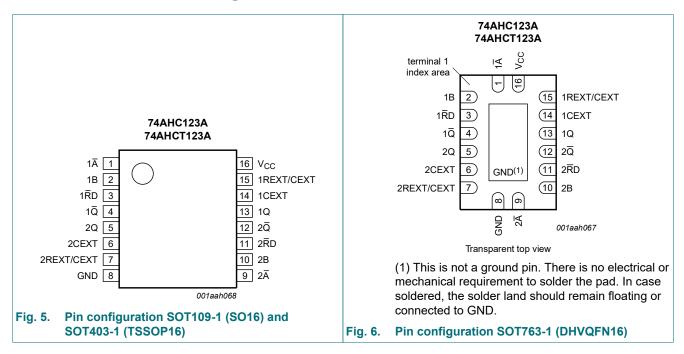

5.1. Pinning

5.2. Pin description

Symbol	Pin	Description
1Ā	1	negative-edge triggered input 1
1B	2	positive-edge triggered input 1
1RD	3	direct reset LOW and positive-edge triggered input 1
1 Q	4	active LOW output 1
2Q	5	active HIGH output 2
2CEXT	6	external capacitor connection 2
2REXT/CEXT	7	external resistor and capacitor connection 2
GND	8	ground (0 V)
2 A	9	negative-edge triggered input 2
2B	10	positive-edge triggered input 2
2RD	11	direct reset LOW and positive-edge triggered input 2
2 Q	12	active LOW output 2
1Q	13	active HIGH output 1
1CEXT	14	external capacitor connection 1
1REXT/CEXT	15	external resistor and capacitor connection 1
V _{CC}	16	supply voltage

ble 2 Pin descriptio

74AHC_AHCT123A

6. Functional description

Table 3. Function table

H = HIGH voltage level; L = LOW voltage level; X = don't care;

 \uparrow = LOW-to-HIGH transition;

↓ = HIGH-to-LOW transition;

 Π = one HIGH level output pulse;

└ = one LOW level output pulse.

Input			Output					
nRD	nĀ	nB	nQ	nQ				
L	Х	Х	L	Н				
Х	Н	Х	L [1]	H [1]				
Х	Х	L	L [1]	H [1]				
Н	L	1	Л	U				
Н	Ļ	Н	Л	U				
1	L	Н	Л	U				

[1] If the monostable multivibrator was triggered before this condition was established, the pulse will continue as programmed.

7. Limiting values

Table 4. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134). Voltages are referenced to GND (ground = 0 V).

Symbol	Parameter	Conditions		Min	Max	Unit
V _{CC}	supply voltage			-0.5	+7.0	V
VI	input voltage			-0.5	+7.0	V
I _{IK}	input clamping current	V ₁ < -0.5 V	[1]	-20	-	mA
Ι _{ΟΚ}	output clamping current	$V_{\rm O}$ < -0.5 V or $V_{\rm O}$ > $V_{\rm CC}$ + 0.5 V	[1]	-	±20	mA
I _O	output current	$V_{O} = -0.5 \text{ V to} (V_{CC} + 0.5 \text{ V})$		-	±25	mA
I _{CC}	supply current			-	75	mA
I _{GND}	ground current			-75	-	mA
T _{stg}	storage temperature			-65	+150	°C
P _{tot}	total power dissipation	T _{amb} = -40 °C to +125 °C	[2]	-	500	mW

[1] The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

[2] For SOT109-1 (SO16) package: P_{tot} derates linearly with 12.4 mW/K above 110 °C.

For SOT403-1 (TSSOP16) package: Ptot derates linearly with 8.5 mW/K above 91 °C.

For SOT763-1 (DHVQFN16) package: Ptot derates linearly with 11.2 mW/K above 106 °C.

8. Recommended operating conditions

Table 5. Recommended operating conditions

Voltages are referenced to GND (ground = 0 V).

Symbol	Parameter	Conditions	7	4AHC123	BA	74	Unit		
			Min	Тур	Max	Min	Тур	Max	
V _{CC}	supply voltage		2.0	5.0	5.5	4.5	5.0	5.5	V
VI	input voltage		0	-	5.5	0	-	5.5	V
Vo	output voltage		0	-	V _{CC}	0	-	V _{CC}	V
T _{amb}	ambient temperature		-40	+25	+125	-40	+25	+125	°C
Δt/ΔV	input transition rise and	V _{CC} = 3.3 V ± 0.3 V	-	-	100	-	-	-	ns/V
	fall rate	$V_{CC} = 5.0 V \pm 0.5 V$	-	-	20	-	-	20	ns/V

9. Static characteristics

Table 6. Static characteristics

Voltages are referenced to GND (ground = 0 V).

Symbol	Parameter	Conditions		25 °C			°C to 5 °C		°C to 5 °C	Unit
				Тур	Max	Min	Max	Min	Max	
74AHC1	23A								1	_
V _{IH}	HIGH-level	V _{CC} = 2.0 V		-	-	1.5	-	1.5	-	V
	input voltage	V _{CC} = 3.0 V	2.1	-	-	2.1	-	2.1	-	V
		V _{CC} = 5.5 V	3.85	-	-	3.85	-	3.85	-	V
VIL	LOW-level	V _{CC} = 2.0 V	-	-	0.5	-	0.5	-	0.5	V
	input voltage	V _{CC} = 3.0 V	-	-	0.9	-	0.9	-	0.9	V
		V _{CC} = 5.5 V	-	-	1.65	-	1.65	-	1.65	V
V _{OH}	HIGH-level	$V_{I} = V_{IH} \text{ or } V_{IL}$								
	output voltage	I _O = -50 μA; V _{CC} = 2.0 V	1.9	2.0	-	1.9	-	1.9	-	V
		I _O = -50 μA; V _{CC} = 3.0 V	2.9	3.0	-	2.9	-	2.9	-	V
		I _O = -50 μA; V _{CC} = 4.5 V	4.4	4.5	-	4.4	-	4.4	-	V
		I_{O} = -4.0 mA; V_{CC} = 3.0 V	2.58	-	-	2.48	-	2.40	-	V
		I _O = -8.0 mA; V _{CC} = 4.5 V	3.94	-	-	3.8	-	3.70	-	V
V _{OL}	LOW-level	V _I = V _{IH} or V _{IL}								
	output voltage	$I_{O} = 50 \ \mu A; V_{CC} = 2.0 \ V$	-	0	0.1	-	0.1	-	0.1	V
		$I_{O} = 50 \ \mu A; V_{CC} = 3.0 \ V$	-	0	0.1	-	0.1	-	0.1	V
		I _O = 50 μA; V _{CC} = 4.5 V	-	0	0.1	-	0.1	-	0.1	V
		I _O = 4.0 mA; V _{CC} = 3.0 V		-	0.36	-	0.44	-	0.55	V
		I _O = 8.0 mA; V _{CC} = 4.5 V	-	-	0.36	-	0.44	-	0.55	V

Dual retriggerable monostable multivibrator with reset

Symbol	Parameter	Conditions			25 °C			°C to 5 °C		°C to 25 °C	Unit
			м	lin	Тур	Max	Min	Max	Min	Max	
lı	input leakage current	V _I = 5.5 V or GND; V _{CC} = 0 V to 5.5 V									
		nREXT/CEXT	[1]	-	-	±0.25	-	±2.5	-	±10.0	μA
		pins nĀ, nB, nRD		-	-	±0.1	-	±1.0	-	±2.0	μA
I _{CC}	supply current	$V_I = V_{CC}$ or GND; $I_O = 0$ A; $V_{CC} = 5.5$ V		-	-	4.0	-	40	-	80	μA
		active state (per circuit); V _I = V _{CC} or GND	[1]								
		V _{CC} = 3.0 V		-	160	250	-	280	-	280	μA
		V _{CC} = 4.5 V		-	380	500	-	650	-	650	μA
		V _{CC} = 5.5 V		-	560	750	-	975	-	975	μA
CI	input capacitance			-	5.0	10	-	10	-	10	pF
Co	output capacitance			-	4.0	-	-	-	-	-	pF
74AHCT	123A	1								1	
V _{IH}	HIGH-level input voltage	V _{CC} = 4.5 V to 5.5 V	2	2.0	-	-	2.0	-	2.0	-	V
V _{IL}	LOW-level input voltage	V_{CC} = 4.5 V to 5.5 V		-	-	0.8	-	0.8	-	0.8	V
V _{OH}	HIGH-level	$V_{I} = V_{IH} \text{ or } V_{IL}; V_{CC} = 4.5 \text{ V}$									
	output voltage	I _O = -50 μA	4	.4	4.5	-	4.4	-	4.4	-	V
		I _O = -8.0 mA	3.	.94	-	-	3.8	-	3.70	-	V
V _{OL}	LOW-level	$V_{I} = V_{IH} \text{ or } V_{IL}; V_{CC} = 4.5 \text{ V}$									
	output voltage	I _O = 50 μA		-	0	0.1	-	0.1	-	0.1	V
		I _O = 8.0 mA		-	-	0.36	-	0.44	-	0.55	V
l _l	input leakage current	nREXT/CEXT; V _I = 5.5 V or GND; V _{CC} = 0 V to 5.5 V	[1]	-	-	±0.25	-	±2.5	-	±10.0	μA
		pins n \overline{A} , nB, n \overline{R} D; V _I = V _{CC} or GND; V _{CC} = 5.5 V		-	-	±0.1	-	±1.0	-	±2.0	μA
I _{CC}	supply current	$V_I = V_{CC}$ or GND; $I_O = 0$ A; $V_{CC} = 5.5$ V		-	-	4.0	-	40	-	80	μA
		active state (per circuit); $V_I = V_{CC}$ or GND	[1]								
		V _{CC} = 4.5 V		-	380	500	-	650	-	650	μA
		V _{CC} = 5.5 V		-	560	750	-	975	-	975	μA
CI	input capacitance			-	3	10	-	10	-	10	pF
C _O	output capacitance			-	4.0	-	-	-	-	-	pF

[1] Voltage on nREXT/CEXT = $0.5 \times V_{CC}$ and pin nREXT/CEXT in OFF-state during test.

Product data sheet

10. Dynamic characteristics

Table 7. Dynamic characteristics

GND = 0 V; For test circuit see Fig. 12.

Symbol	Parameter	Conditions		25 °C			°C to 5 °C		°C to 5 °C	Unit
			Min	Typ[1]	Мах	Min	Max	Min	Мах	
74AHC1	23A									
t _{pd}	propagation	$n\overline{A}$ and $n\overline{B}$ to $n\overline{Q}$ and $n\overline{Q}$; see Fig. 7 [2]								
	delay	V _{CC} = 3.0 V to 3.6 V; C _L = 15 pF	-	7.4	20.6	1.0	24.0	1.0	26.0	ns
		V _{CC} = 3.0 V to 3.6 V; C _L = 50 pF	-	10.5	24.1	1.0	27.5	1.0	30.0	ns
		V_{CC} = 4.5 V to 5.5 V; C _L = 15 pF	-	5.1	12.0	1.0	14.0	1.0	15.5	ns
		V_{CC} = 4.5 V to 5.5 V; C _L = 50 pF	-	7.3	14.0	1.0	16.0	1.0	17.5	ns
		$n\overline{R}D$ to nQ and $n\overline{Q}$; see <u>Fig. 7</u> [2]								
		V _{CC} = 3.0 V to 3.6 V; C _L = 15 pF	-	8.2	22.4	1.0	26.0	1.0	28.0	ns
		V _{CC} = 3.0 V to 3.6 V; C _L = 50 pF	-	11.7	25.9	1.0	29.5	1.0	32.0	ns
		V _{CC} = 4.5 V to 5.5 V; C _L = 15 pF	-	5.6	12.9	1.0	15.0	1.0	16.5	ns
		V _{CC} = 4.5 V to 5.5 V; C _L = 50 pF	-	8.1	14.9	1.0	17.0	1.0	19.0	ns
		\overline{nRD} to nQ and \overline{nQ} (reset); see <u>Fig. 7</u> [2]								
		V _{CC} = 3.0 V to 3.6 V; C _L = 15 pF	-	6.4	15.8	1.0	18.5	1.0	20.0	ns
		V _{CC} = 3.0 V to 3.6 V; C _L = 50 pF	-	9.2	19.3	1.0	22.0	1.0	24.5	ns
		V _{CC} = 4.5 V to 5.5 V; C _L = 15 pF	-	4.4	9.4	1.0	11.0	1.0	12.0	ns
		$V_{CC} = 4.5 \text{ V to } 5.5 \text{ V; } C_{L} = 50 \text{ pF}$	-	6.3	11.4	1.0	13.0	1.0	14.5	ns
t _W	pulse width	inputs; $n\overline{A}$ = LOW; see Fig. 7								
		V _{CC} = 3.0 V to 3.6 V	5.0	-	-	5.0	-	5.0	-	ns
		V _{CC} = 4.5 V to 5.5 V	5.0	-	-	5.0	-	5.0	-	ns
		inputs; nB = HIGH; see <u>Fig. 7</u>								+
		V _{CC} = 3.0 V to 3.6 V	5.0	-	-	5.0	-	5.0	-	ns
		V _{CC} = 4.5 V to 5.5 V	5.0	-	-	5.0	-	5.0	-	ns
		inputs; $\overline{nRD} = LOW$; see Fig. 7								-
		V _{CC} = 3.0 V to 3.6 V	5.0	-	-	5.0	-	5.0	-	ns
		V _{CC} = 4.5 V to 5.5 V	5.0	-	-	5.0	-	5.0	-	ns
		outputs; $n\overline{Q}$ = LOW and[3] nQ = HIGH; C_L = 50 pF;see Fig. 7, Fig. 8, Fig. 9 and Fig. 10								
		C _{EXT} = 28 pF; R _{EXT} = 2 kΩ								
		V _{CC} = 3.0 V to 3.6 V	-	115	240	-	300	-	300	ns
		V _{CC} = 4.5 V to 5.5 V	-	100	200	-	240	-	240	ns
		C _{EXT} = 0.01 μF; R _{EXT} = 10 kΩ								
		V _{CC} = 3.0 V to 3.6 V	90	100	110	90	110	85	115	μs
		V _{CC} = 4.5 V to 5.5 V	90	100	110	90	110	85	115	μs
		C _{EXT} = 0.1 μF; R _{EXT} = 10 kΩ;								<u> </u>
		V _{CC} = 3.0 V to 3.6 V	0.9	1	1.1	0.9	1.1	0.85	1.15	ms
		V _{CC} = 4.5 V to 5.5 V	0.9	1	1.1	0.9	1.1	0.85	1.15	ms

74AHC_AHCT123A

Dual retriggerable monostable multivibrator with reset

Symbol	Parameter	Conditions		25 °C			°C to 5 °C	-	°C to 5 °C	Unit
			Min	Typ[1]	Max	Min	Max	Min	Max	-
t _{rtrig}	retrigger time	$n\overline{A}$ to nB; C _{EXT} = 100 pF; R _{EXT} = 1 kΩ; C _L = 50 pF; see Fig. 8 and Fig. 10								
		V _{CC} = 3.0 V to 3.6 V	-	60	-	-	-	-	-	ns
		V _{CC} = 4.5 V to 5.5 V	-	39	-	-	-	-	-	ns
		$n\overline{A}$ to nB; C _{EXT} = 0.01 µF; R _{EXT} = 1 kΩ; C _L = 50 pF; see Fig. 8 and Fig. 10								
		V _{CC} = 3.0 V to 3.6 V	-	1.5	-	-	-	-	-	μs
		V _{CC} = 4.5 V to 5.5 V	-	1.2	-	-	-	-	-	μs
C _{PD}	power dissipation capacitance	$C_{L} = 50 \text{ pF; } f_{i} = 1 \text{ MHz;} $ $V_{I} = \text{GND to } V_{CC} $ [4]	-	57	-	-	-	-	-	pF
74AHCT	123A			1			1	1	1	
t _{pd}	propagation	$n\overline{A}$ and nB to nQ and $n\overline{Q}$; see <u>Fig. 7</u> [2]								
	delay	V _{CC} = 4.5 V to 5.5 V; C _L = 15 pF	-	5.0	12.0	1.0	14.0	1.0	15.5	ns
		V _{CC} = 4.5 V to 5.5 V; C _L = 50 pF	-	7.1	14.0	1.0	16.0	1.0	17.5	ns
		nRD to nQ and nQ; see Fig. 7 [2]								-
		V_{CC} = 4.5 V to 5.5 V; C _L = 15 pF	-	5.2	12.9	1.0	15.0	1.0	16.5	ns
		V_{CC} = 4.5 V to 5.5 V; C _L = 50 pF	-	7.5	14.9	1.0	17.0	1.0	18.5	ns
		\overline{nRD} to nQ and \overline{nQ} (reset); see Fig. 7 [2]								
		V _{CC} = 4.5 V to 5.5 V; C _L = 15 pF	-	4.7	9.4	1.0	11.0	1.0	12.0	ns
		V_{CC} = 4.5 V to 5.5 V; C _L = 50 pF	-	6.7	11.4	1.0	13.0	1.0	14.5	ns
t _W	pulse width	inputs; $n\overline{A}$ = LOW; C _L = 50 pF; see Fig. 7								
		V _{CC} = 4.5 V to 5.5 V	5.0	-	-	5.0	-	5.0	-	ns
		inputs; nB = HIGH; C _L = 50 pF; see <u>Fig. 7</u>								
		V _{CC} = 4.5 V to 5.5 V	5.0	-	-	5.0	-	5.0	-	ns
		inputs; $n\overline{R}D = LOW$; $C_L = 50 pF$; see <u>Fig. 7</u>								
		V _{CC} = 4.5 V to 5.5 V	5.0	-	-	5.0	-	5.0	-	ns
		outputs; $n\overline{Q}$ = LOW and [3] nQ = HIGH; C_L = 50 pF; C_{EXT} = 28 pF; R_{EXT} = 2 k Ω ; see Fig. 7, Fig. 8, Fig. 9 and Fig. 10								
		V _{CC} = 4.5 V to 5.5 V	-	100	200	-	240	-	240	ns
		C _{EXT} = 0.01 μF; R _{EXT} = 10 kΩ								
		V _{CC} = 4.5 V to 5.5 V	90	100	110	90	110	85	115	μs
		C _{EXT} = 0.1 μF; R _{EXT} = 10 kΩ								
		V _{CC} = 4.5 V to 5.5 V	0.9	1	1.1	0.9	1.1	0.85	1.15	ms

Product data sheet

Dual retriggerable monostable multivibrator with reset

Symbol	Parameter	Conditions		25 °C			°C to 5 °C	-40 °C to +125 °C		Unit
			Min	Typ[1]	Max	Min	Max	Min	Max	1
t _{rtrig}	retrigger time	$n\overline{A}$ to nB; C _{EXT} = 100 pF; R _{EXT} = 1 k Ω ; C _L = 50 pF; see <u>Fig. 8</u> and <u>Fig. 10</u>								
		V _{CC} = 4.5 V to 5.5 V	-	60	-	-	-	-	-	ns
		$n\overline{A}$ to nB; C _{EXT} = 0.01 µF; R _{EXT} = 1 k Ω ; C _L = 50 pF; see <u>Fig. 8</u> and <u>Fig. 10</u>								
		V _{CC} = 4.5 V to 5.5 V	-	1.5	-	-	-	-	-	μs
C _{PD}	power dissipation capacitance	$\label{eq:CL} \begin{array}{l} C_L = 50 \text{ pF}; \text{f}_\text{i} = 1 \text{ MHz}; \\ \text{V}_\text{I} = \text{GND to } \text{V}_\text{CC} \end{array} \tag{4}$	-	58	-	-	-	-	-	pF
Externa	l components									
R _{EXT}	external	V _{CC} = 2.0 V	5	-	-	-	-	-	-	kΩ
	resistance	V _{CC} > 3.0 V	1	-	-	-	-	-	-	kΩ
C _{EXT}	external	V _{CC} = 2.0 V [5	-	-	-	-	-	-	-	pF
	capacitance	V _{CC} > 3.0 V [5]	-	-	-	-	-	-	-	pF

Typical values are measured at nominal supply voltage (V_{CC} = 3.3 V and V_{CC} = 5.0 V). [1]

[1] Typical values are inclusived at nominal suppry voltage (v_{CC} = 0.0 v and v_{CC} = 0.0 v)
[2] t_{pd} is the same as t_{PLH} and t_{PHL}; C_{EXT} = 0 pF; R_{EXT} = 5 kΩ.
[3] For C_{EXT} ≥ 10 nF the typical value of the pulse width t_W (µs) = C_{EXT} (nF) × R_{EXT} (kΩ).
[4] C_{PD} is used to determine the dynamic power dissipation P_D (µW). P_D = C_{PD} × V_{CC}² × f_i + Σ(C_L × V_{CC}² × f_o) where:
(4) f = insut ferrometermine Mulex

- - f_i = input frequency in MHz;


fo = output frequency in MHz;

 C_L = output load capacitance in pF;

V_{CC} = supply voltage in V.

[5] C_{EXT} has no limits.


74AHC_AHCT123A **Product data sheet**

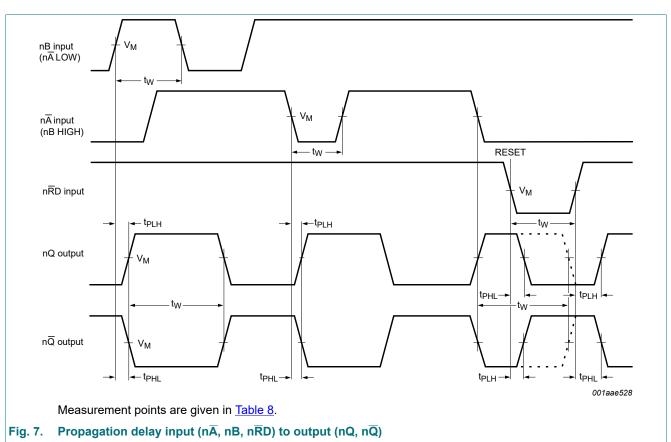

10.1. Waveforms


 Table 8. Measurement points

Туре	Input	Output
	V _M	V _M
74AHC123A	0.5V _{CC}	0.5V _{CC}
74AHCT123A	1.5 V	0.5V _{CC}

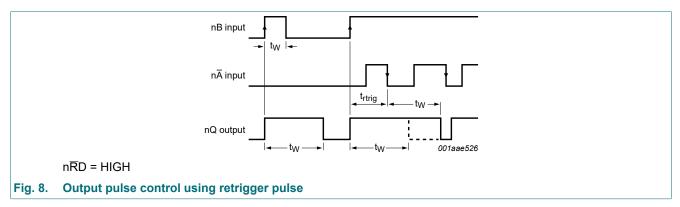


Product data sheet


Dual retriggerable monostable multivibrator with reset

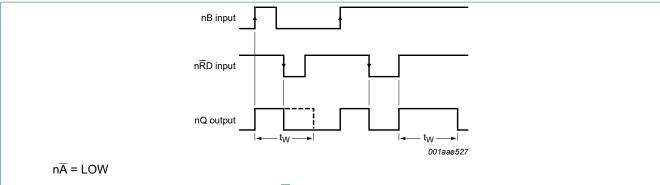



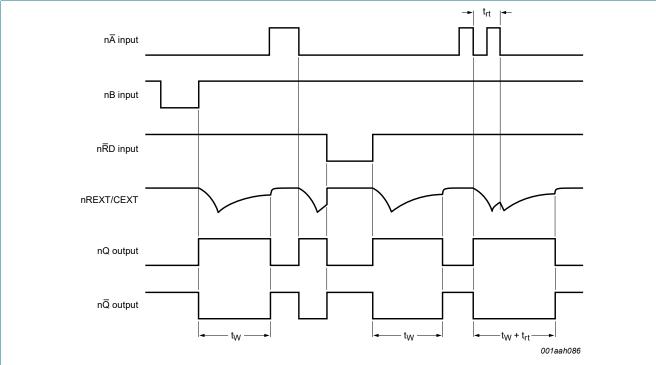



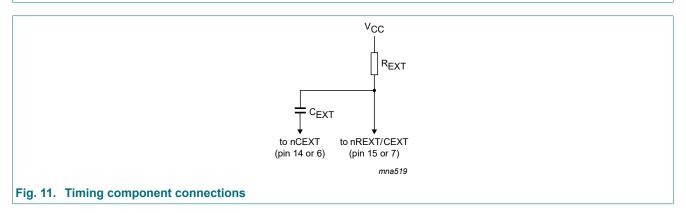

Product data sheet

Dual retriggerable monostable multivibrator with reset

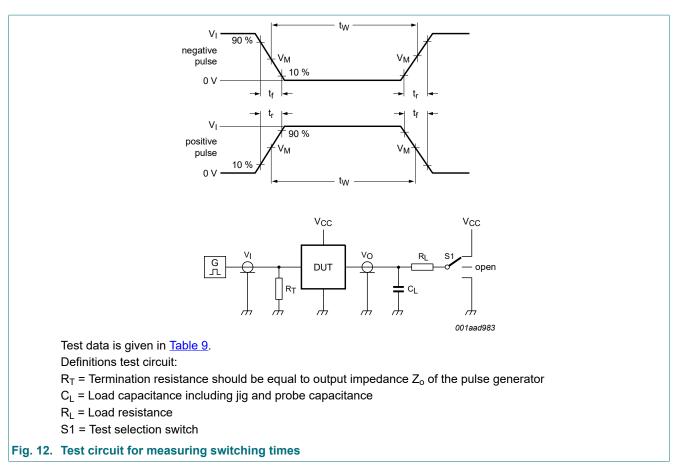


Table 9. Test data

Туре	Input		Load		S1 position			
	VI	t _r , t _f	CL	L R _L t _P		t _{PZH} , t _{PHZ}	t _{PZL} , t _{PLZ}	
74AHC123A	V _{CC}	3.0 ns	15 pF, 50 pF	1 kΩ	open	GND	V _{CC}	
74AHCT123A	3.0 V	3.0 ns	15 pF, 50 pF	1 kΩ	open	GND	V _{CC}	

11. Package outline

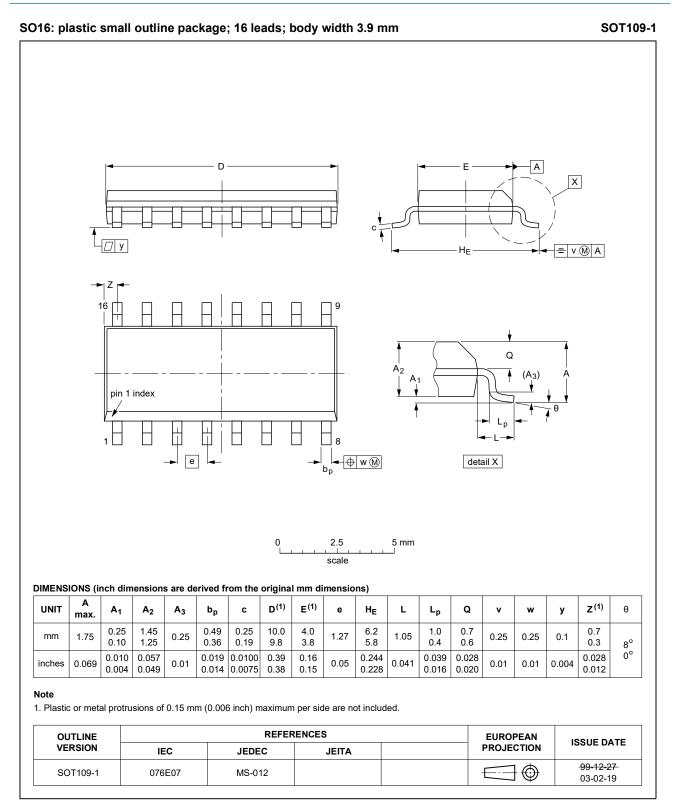


Fig. 13. Package outline SOT109-1 (SO16)

74AHC_AHCT123A

Dual retriggerable monostable multivibrator with reset


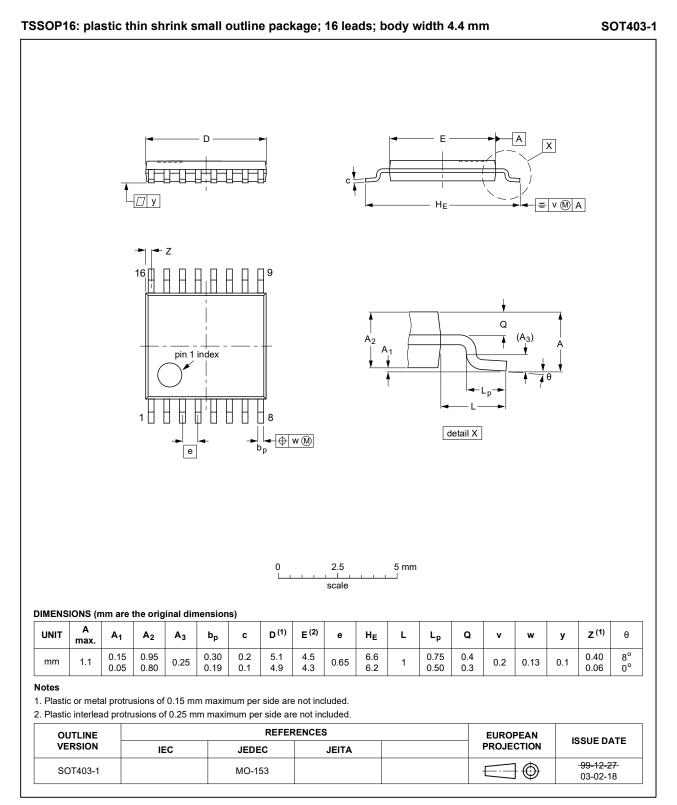


Fig. 14. Package outline SOT403-1 (TSSOP16)

Downloaded from Arrow.com.

Dual retriggerable monostable multivibrator with reset



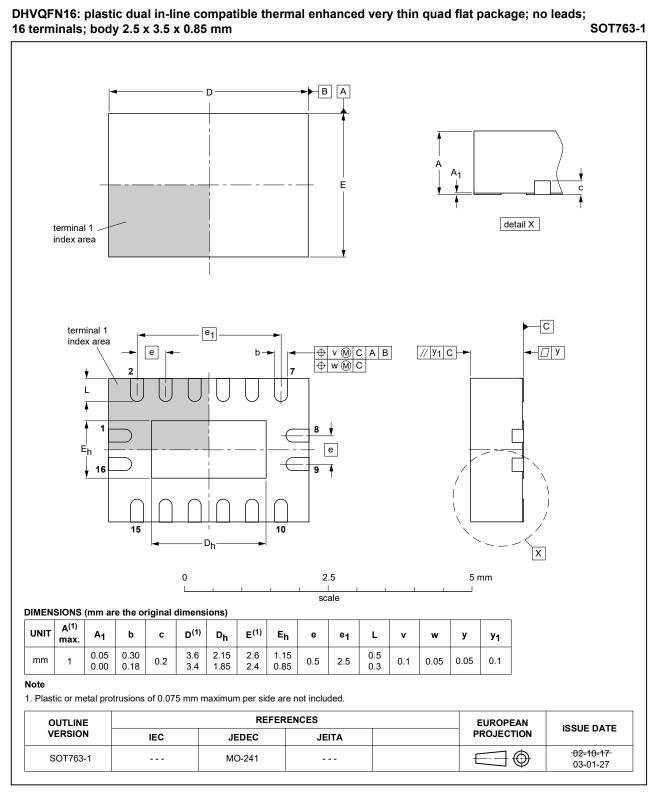

Product data sheet

12. Abbreviations

Acronym	Description
CDM	Charged-Device Model
CMOS	Complementary Metal Oxide Semiconductor
DUT	Device Under Test
ESD	ElectroStatic Discharge
НВМ	Human Body Model
MM	Machine Model
TTL	Transistor-Transistor Logic

13. Revision history

Table 11. Revision history

Document ID	Release date	Data sheet status	Change notice	Supersedes	
74AHC_AHCT123A v.5	20200617	Product data sheet	-	74AHC_AHCT123A v.4	
Modifications:	 The format of this data sheet has been redesigned to comply with the identity guidelines of Nexperia. Legal texts have been adapted to the new company name where appropriate. <u>Section 1</u> and <u>Section 2</u> updated. <u>Table 4</u>: Derating values for P_{tot} total power dissipation updated. 				
74AHC_AHCT123A v.4	20111108	Product data sheet	-	74AHC_AHCT123A v.3	
Modifications:	Legal pages updated.				
74AHC_AHCT123A v.3	20110908	Product data sheet	-	74AHC_AHCT123A v.2	
74AHC_AHCT123A v.2	20080118	Product data sheet	-	74AHC_AHCT123A v.1	
74AHC_AHCT123A v.1	20000315	Product specification	-	-	

14. Legal information

Data sheet status

Document status [1][2]	Product status [3]	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

 Please consult the most recently issued document before initiating or completing a design.

[2] The term 'short data sheet' is explained in section "Definitions".

[3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the internet at <u>https://www.nexperia.com</u>.

Definitions

Draft — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. Nexperia does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local Nexperia sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

Product specification — The information and data provided in a Product data sheet shall define the specification of the product as agreed between Nexperia and its customer, unless Nexperia and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the Nexperia product is deemed to offer functions and qualities beyond those described in the Product data sheet.

Disclaimers

Limited warranty and liability — Information in this document is believed to be accurate and reliable. However, Nexperia does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. Nexperia takes no responsibility for the content in this document if provided by an information source outside of Nexperia.

In no event shall Nexperia be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, Nexperia's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the Terms and conditions of commercial sale of Nexperia.

Right to make changes — Nexperia reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use — Nexperia products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an Nexperia product can reasonably be expected to result in personal

Dual retriggerable monostable multivibrator with reset

injury, death or severe property or environmental damage. Nexperia and its suppliers accept no liability for inclusion and/or use of Nexperia products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

Quick reference data — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

Applications — Applications that are described herein for any of these products are for illustrative purposes only. Nexperia makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using Nexperia products, and Nexperia accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the Nexperia product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

Nexperia does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using Nexperia products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). Nexperia does not accept any liability in this respect.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

Terms and conditions of commercial sale — Nexperia products are sold subject to the general terms and conditions of commercial sale, as published at <u>http://www.nexperia.com/profile/terms</u>, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Nexperia hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of Nexperia products by customer.

No offer to sell or license — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

Export control — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

Non-automotive qualified products — Unless this data sheet expressly states that this specific Nexperia product is automotive qualified, the product is not suitable for automotive use. It is neither qualified nor tested in accordance with automotive testing or application requirements. Nexperia accepts no liability for inclusion and/or use of non-automotive qualified products in automotive equipment or applications.

In the event that customer uses the product for design-in and use in automotive applications to automotive specifications and standards, customer (a) shall use the product without Nexperia's warranty of the product for such automotive applications, use and specifications, and (b) whenever customer uses the product for automotive applications beyond Nexperia's specifications such use shall be solely at customer's own risk, and (c) customer fully indemnifies Nexperia for any liability, damages or failed product claims resulting from customer design and use of the product for automotive applications beyond Nexperia's standard warranty and Nexperia's product specifications.

Translations — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

Contents

1. General description	1
2. Features and benefits	1
3. Ordering information	1
4. Functional diagram	2
5. Pinning information	4
5.1. Pinning	4
5.2. Pin description	4
6. Functional description	5
7. Limiting values	
8. Recommended operating conditions	6
9. Static characteristics	6
10. Dynamic characteristics	8
10.1. Waveforms	11
11. Package outline	14
12. Abbreviations	17
13. Revision history	17
14. Legal information	18

© Nexperia B.V. 2020. All rights reserved

For more information, please visit: http://www.nexperia.com For sales office addresses, please send an email to: salesaddresses@nexperia.com Date of release: 17 June 2020

74AHC_AHCT123A