

## THIS SPEC IS OBSOLETE

Spec No: 38-03027

Spec Title: PALCE22V10 FLASH-ERASABLE

REPROGRAMMABLE CMOS PAL(R)

**DEVICE** 

Sunset Owner: Adrian Mendes (AMV)

Replaced by: None




PALCE22V10

# Flash-erasable Reprogrammable CMOS PAL® Device

### **Features**

- · Low power
  - 90 mA max. commercial (10 ns)
  - 130 mA max. commercial (5 ns)
- CMOS Flash EPROM technology for electrical erasability and reprogrammability
- Variable product terms
  - 2 × (8 through 16) product terms
- User-programmable macrocell
  - Output polarity control
  - Individually selectable for registered or combinatorial operation
- Up to 22 input terms and 10 outputs

- DIP, LCC, and PLCC available
- 5 ns commercial version
  - 4 ns t<sub>CO</sub>
  - 3 ns t<sub>S</sub>
  - 5 ns t<sub>PD</sub>
  - 181-MHz state machine
- 10 ns military and industrial versions
  - 7 ns  $t_{CO}$
  - 6 ns t<sub>S</sub>
  - 10 ns t<sub>PD</sub>
  - 110-MHz state machine
- 15-ns commercial, industrial, and military versions
- 25-ns commercial, industrial, and military versions
- · High reliability
  - Proven Flash EPROM technology
  - 100% programming and functional testing

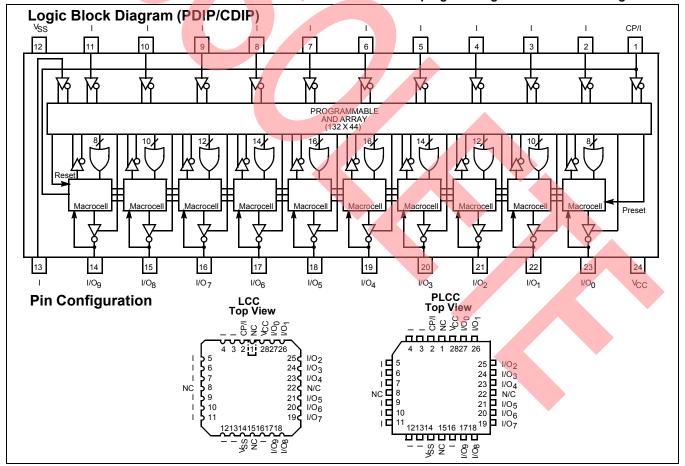

### **Selection Guide**

Generic Part Number	t <sub>PD</sub> ns		t <sub>S</sub> ns		t <sub>co</sub>	ns	I <sub>CC</sub> mA	
	Com'l	Mil/Ind	Com'l	Mil/Ind	Com'l	Mil/Ind	Com'l	Mil/Ind
PALCE22V10-5	5		3		4		130	
PALCE22V10-7	7.5		5		5		130	
PALCE22V10-10	10	10	6	6	7	7	90	150
PALCE22V10-15	15	15	10	10	8	8	90	120
PALCE22V10-25	25	25	15	15	15	15	90	120

### **Functional Description**

The Cypress PALCE22V10 is a CMOS Flash-erasable second-generation programmable array logic device. It is implemented with the familiar sum-of-products (AND-OR) logic structure and the programmable macrocell.

The PALCE22V10 is executed in a 24-pin 300-mil molded DIP, a 300-mil cerDIP, a 28-lead square ceramic leadless chip carrier, a 28-lead square plastic leaded chip carrier, and provides up to 22 inputs and 10 outputs. The PALCE22V10 can be electrically erased and reprogrammed. The programmable macrocell provides the capability of defining the architecture of each output individually. Each of the ten potential outputs may be specified as "registered" or "combinatorial." Polarity of each output may also be individually selected, allowing complete flexibility of output configuration. Further configurability is provided through "array" configurable "output enable" for each potential output. This feature allows the 10 outputs to be reconfigured as inputs on an individual basis, or alternately used as a combination I/O controlled by the programmable array.

PALCE22V10 features a variable product term architecture. There are 5 pairs of product term sums beginning at 8 product terms per output and incrementing by 2 to 16 product terms per output. By providing this variable structure, the PALCE22V10 is optimized to the configurations found in a majority of applications without creating devices that burden the product term structures with unusable product terms and lower performance.

Additional features of the Cypress PALCE22V10 include a synchronous preset and an asynchronous reset product term. These product terms are common to all macrocells, eliminating the need to dedicate standard product terms for initialization functions. The device automatically resets upon power-up.

The PALCE22V10, featuring programmable macrocells and variable product terms, provides a device with the flexibility to

implement logic functions in the 500- to 800-gate-array complexity. Since each of the ten output pins may be individually configured as inputs on a temporary or permanent basis, functions requiring up to 21 inputs and only a single output and down to twelve inputs and ten outputs are possible. The ten potential outputs are enabled using product terms. Any output pin may be permanently selected as an output or arbitrarily enabled as an output and an input through the selective use of individual product terms associated with each output. Each of these outputs is achieved through an individual programmable macrocell. These macrocells are programmable to provide a combinatorial or registered inverting or non-inverting output. In a registered mode of operation, the output of the register is fed back into the array, providing current status information to the array. This information is available for establishing the next result in applications such as control state machines. In a combinatorial configuration, the combinatorial output or, if the output is disabled, the signal present on the I/O pin is made available to the array. The flexibility provided by both programmable product term control of the outputs and variable product terms allows a significant gain in functional density through the use of programmable logic.


Along with this increase in functional density, the Cypress PALCE22V10 provides lower-power operation through the use of CMOS technology, and increased testability with Flash reprogrammability.

### **Configuration Table**

	Registered/Combinatorial									
C <sub>1</sub>	Configuration									
0	0	Registered/Active LOW								
0	1	Registered/Active HIGH								
1	0	Combinatorial/Active LOW								
1	1	Combinatorial/Active HIGH								

Document #: 38-03027 Rev. \*C

### Macrocell

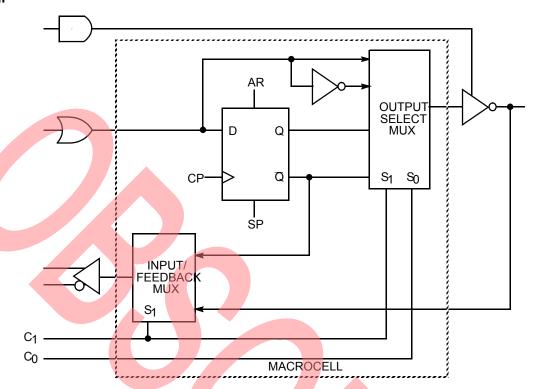

### PALCE22V10

### **Maximum Ratings**

(Above which the useful life may be impaired. For user guide-lines, not tested.)

Storage Temperature .....-65°C to +150°C

Ambient Temperature with

Power Applied .....-55°C to +125°C

Supply Voltage to Ground Potential

(Pin 24 to Pin 12) ....-0.5V to +7.0V

DC Voltage Applied to Outputs in High-Z State ....-0.5V to +7.0V

DC Input Voltage ....-0.5V to +7.0V

Output Current into Outputs (LOW)	16 mA
DC Programming Voltage	12.5V
Latch-up Current	> 200 mA
Static Discharge Voltage (per MIL-STD-883, Method 3015)	>2001V
Operating Range	

Range	Ambient Temperature	V <sub>cc</sub>
Commercial	0°C to +75°C	5V ±5%
Industrial	–40°C to +85°C	5V ±10%
Military <sup>[1]</sup>	–55°C to +125°C	5V ±10%

### Electrical Characteristics Over the Operating Range<sup>[2]</sup>

Parameter	Description	Test Condi	tions		Min.	Max.	Unit
V <sub>OH</sub>	Output HIGH Voltage	V <sub>CC</sub> = Min.,	$I_{OH} = -3.2 \text{ mA}$	Com'l	2.4		V
		$V_{IN} = V_{IH} \text{ or } V_{IL}$	I <sub>OH</sub> = -2 mA	Mil/Ind			
$V_{OL}$	Output LOW Voltage	V <sub>CC</sub> = Min.,	I <sub>OL</sub> = 16 mA	Com'l		0.5	٧
		$V_{IN} = V_{IH} \text{ or } V_{IL}$	I <sub>OL</sub> = 12 mA	Mil/Ind			
V <sub>IH</sub>	Input HIGH Level	Guaranteed Input Logical HIGH Vo	Itage for All Inputs <sup>[3]</sup>		2.0		٧
V <sub>IL</sub> <sup>[4]</sup>	Input LOW Level	Guaranteed Input Logical LOW Vol	tage for All Inputs <sup>[3]</sup>		-0.5	8.0	V
I <sub>IX</sub>	Input Leakage Current	$V_{SS} \le V_{IN} \le V_{CC}$ , $V_{CC} = Max$ .			-10	10	μА
I <sub>OZ</sub>	Output Leakage Current	$V_{CC} = Max., V_{SS} \le V_{OUT} \le V_{CC}$	•		<del>-4</del> 0	40	μА
I <sub>SC</sub>	Output Short Circuit Current	$V_{CC} = Max., V_{OUT} = 0.5V^{[5,6]}$			-30	-130	mΑ
I <sub>CC1</sub>	Standby Power Supply	$V_{CC} = Max.,$	10, 15, 25 ns	Com'l		90	mA
	Current	V <sub>IN</sub> = GND, Outputs Open in Unprogrammed	5, 7.5 ns			130	mΑ
		Device	15, 25 ns	Mil/Ind		120	mΑ
			10 ns			120	mA
I <sub>CC2</sub> <sup>[6]</sup>	Operating Power Supply	$V_{CC} = Max., V_{IL} = 0V, V_{IH} = 3V,$	10, 15, 25 ns	Com'l		110	mA
	Current	Output Open, Device Programmed as a 10-bit Counter,	5, 7.5 ns	Com'l		140	mA
		f = 25 MHz	15, 25 ns	Mil/Ind		130	mA
			10 ns	Mil/Ind		130	mA

### Capacitance<sup>[6]</sup>

Parameter	Description	Test Conditions	Min.	Max.	Unit
C <sub>IN</sub>	Input Capacitance	V <sub>IN</sub> = 2.0V @ f = 1 MHz		10	pF
C <sub>OUT</sub>	Output Capacitance	V <sub>OUT</sub> = 2.0V @ f = 1 MHz		10	pF


### Endurance Characteristics<sup>[6]</sup>

Parameter	Description	Test Conditions	Min.	Max.	Unit
N	Minimum Reprogramming Cycles	Normal Programming Conditions	100		Cycles

### Notes:

- 1. T<sub>A</sub> is the "instant on" case temperature.
- 2. See the last page of this specification for Group A subgroup testing information.
- 3. These are absolute values with respect to device ground. All overshoots due to system or tester noise are included.
- 4.  $V_{IL}$  (Min.) is equal to -3.0V for pulse durations less than 20 ns.
- 5. Not more than one output should be tested at a time. Duration of the short circuit should not be more than one second. V<sub>OUT</sub> = 0.5V has been chosen to avoid test problems caused by tester ground degradation.
- 6. Tested initially and after any design or process changes that may affect these parameters.

### **AC Test Loads and Waveforms**

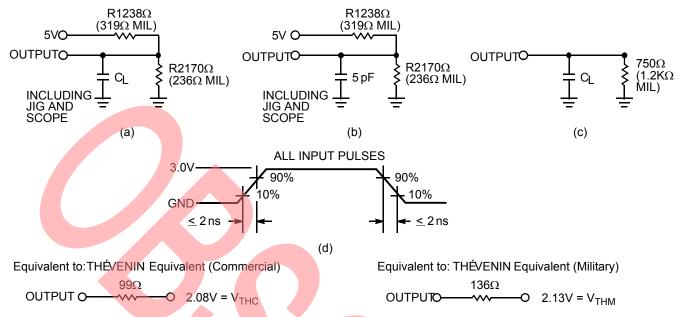

Load Speed	C <sub>L</sub>	Package
5, 7.5, 10, 15, 25 ns		PDIP, CDIP, PLCC, LCC

Parameter	V <sub>X</sub>	Output Waveform Measurement Level
t <sub>ER (- )</sub>	1.5V	V <sub>OH</sub> 0.5V V <sub>X</sub>
t <sub>ER (+)</sub>	2.6V	V <sub>OL</sub> 0.5V V <sub>X</sub>
t <sub>EA (+)</sub>	0V	V <sub>X</sub> 1.5V V <sub>OH</sub>
t <sub>EA (- )</sub>	V <sub>thc</sub>	V <sub>X</sub> 0.5V V <sub>OL</sub>

(e) Test Waveforms

### Commercial Switching Characteristics PALCE22V10 [2,7]

		22V10-5		22V10-7		22V10-10		22V10-15		22V10-25		
Parameter	Description	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Unit
t <sub>PD</sub>	Input to Output Propagation Delay <sup>[8]</sup>	3	5	3	7.5	3	10	3	15	3	25	ns
t <sub>EA</sub>	Input to Output Enable Delay <sup>[9]</sup>		6		8		10		15		25	ns
t <sub>ER</sub>	Input to Output Disable Delay <sup>[10]</sup>		6		8		10	1	15		25	ns
t <sub>CO</sub>	Clock to Output Delay <sup>[8]</sup>	2	4	2	5	2	7	2	8	2	15	ns

### Notes:

- 7. Part (a) of AC Test Loads and Waveforms is used for all parameters except t<sub>ER</sub> and t<sub>EA(+)</sub>. Part (b) of AC Test Loads and Waveforms is used for t<sub>ER</sub>. Part (c) of AC Test Loads and Waveforms is used for t<sub>EA(+)</sub>.
   8. Min. times are tested initially and after any design or process changes that may affect these parameters.
- The test load of (a) of AC Test Loads and Waveforms is used for measuring t<sub>EA(+)</sub> only. Please see (e) of AC Test Loads and Waveforms for enable and disable test waveforms and measurement reference levels.
- 10. This parameter is measured as the time after output disable input that the previous output data state remains stable on the output. This delay is measured to the point at which a previous HIGH level has fallen to 0.5V below V<sub>OH</sub> min. or a previous LOW level has risen to 0.5V above V<sub>OL</sub> max. Please see (e) of AC Test Loads and Waveforms for enable and disable test waveforms and measurement reference levels.

### Commercial Switching Characteristics PALCE22V10 (continued)[2,7]

		22V	10-5	22V	10-7	22V	10-10	22V10-15		22V10-25		
Parameter	Description	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Unit
t <sub>S1</sub>	Input or Feedback Set-Up Time	3		5		6		10		15		ns
t <sub>S2</sub>	Synchronous Preset Set-Up Time	4		6		7		10		15		ns
t <sub>H</sub>	Input Hold Time	0		0		0		0		0		ns
t <sub>P</sub>	External Clock Period (t <sub>CO</sub> + t <sub>S</sub> )	7		10		12		20		30		ns
t <sub>WH</sub>	Clock Width HIGH <sup>[6]</sup>	2.5		3		3		6		13		ns
t <sub>WL</sub>	Clock Width LOW[6]	2.5		3		3		6		13		ns
f <sub>MAX1</sub>	External Maximum Frequency (1/(t <sub>CO</sub> + t <sub>S</sub> )) <sup>[11]</sup>	143		100		76.9		55.5		33.3		MHz
f <sub>MAX2</sub>	Data Path Maximum Frequency (1/(t <sub>WH</sub> + t <sub>WL</sub> )) <sup>[6, 12]</sup>	200		166		142		83.3		35.7		MHz
f <sub>MAX3</sub>	Internal Feedback Maximum Frequency (1/(t <sub>CF</sub> + t <sub>S</sub> )) <sup>[6,13]</sup>	181		133		111		68.9		38.5		MHz
t <sub>CF</sub>	Register Clock to Feedback Input <sup>[6,14]</sup>		2.5		2.5		3		4.5		13	ns
t <sub>AW</sub>	Asynchronous Reset Width	8	7	8		10		15		25		ns
t <sub>AR</sub>	Asynchronous Reset Recovery Time	4		5		6		10		25		ns
t <sub>AP</sub>	Asynchronous Reset to Registered Output Delay		7.5		12		13		20		25	ns
t <sub>SPR</sub>	Synchronous Preset Recovery Time	4		6		8		10		15		ns
t <sub>PR</sub>	Power-up Reset Time <sup>[6,15]</sup>	1		1		1		1		1		μS

### Military and Industrial Switching Characteristics PALCE22V10 [2,7]


		22V	10-10	22V	10-15	22V	10-25	
Parameter	Description	Min.	Max.	Min.	Max.	Min.	Max.	Unit
t <sub>PD</sub>	Input to Output Propagation Delay <sup>[8]</sup>	3	10	3	15	3	25	ns
t <sub>EA</sub>	Input to Output Enable Delay <sup>[9]</sup>		10		15		25	ns
t <sub>ER</sub>	Input to Output Disable Delay <sup>[10]</sup>		10		15		25	ns
t <sub>co</sub>	Clock to Output Delay <sup>[8]</sup>	2	7	2	8	2	15	ns
t <sub>S1</sub>	Input or Feedback Set-up Time	6		10		18		ns
t <sub>S2</sub>	Synchronous Preset Set-up Time	7		10		18		ns
t <sub>H</sub>	Input Hold Time	0		0		0		ns
t <sub>P</sub>	External Clock Period (t <sub>CO</sub> + t <sub>S</sub> )	12		20		33		ns
t <sub>WH</sub>	Clock Width HIGH <sup>[6]</sup>	3		6		14		ns
t <sub>WL</sub>	Clock Width LOW <sup>[6]</sup>	3		6		14		ns
f <sub>MAX1</sub>	External Maximum Frequency (1/(t <sub>CO</sub> + t <sub>S</sub> )) <sup>[11]</sup>	76.9		50.0		30.3		MHz
f <sub>MAX2</sub>	Data Path Maximum Frequency (1/(t <sub>WH</sub> + t <sub>WL</sub> )) <sup>[6, 12]</sup>	142		83.3		35.7		MHz

- Notes:
   This specification indicates the guaranteed maximum frequency at which a state machine configuration with external feedback can operate.
   This specification indicates the guaranteed maximum frequency at which the device can operate in data path mode.
   This specification indicates the guaranteed maximum frequency at which a state machine configuration with internal only feedback can operate.
   This parameter is calculated from the clock period at f<sub>MAX</sub> internal (1f<sub>MAX3</sub>) as measured (see Note above) minus t<sub>S</sub>.
   The registers in the PALCE22V10 have been designed with the capability to reset during system power-up. Following power-up, all registers will be reset to a logic LOW state. The output state will depend on the polarity of the output buffer. This feature is useful in establishing state machine initialization. To insure proper operation, the rise in V<sub>CC</sub> must be monotonic and the timing constraints depicted in Power-Up Reset Waveform must be satisfied.


### Military and Industrial Switching Characteristics PALCE22V10 (continued)[2,7]

		22V10-10		22V10-15		22V10-25		
Parameter	r Description M		Max.	Min.	Max.	Min.	Max.	Unit
f <sub>MAX3</sub>	Internal Feedback Maximum Frequency (1/(t <sub>CF</sub> + t <sub>S</sub> )) <sup>[6, 13]</sup>	111		68.9		32.2		MHz
t <sub>CF</sub>	Register Clock to Feedback Input <sup>[6, 14]</sup>		3		4.5		13	ns
t <sub>AW</sub>	Asynchronous Reset Width	10		15		25		ns
t <sub>AR</sub>	Asynchronous Reset Recovery Time	6		12		25		ns
t <sub>AP</sub>	Asynchronous Reset to Registered Output Delay		12		20		25	ns
t <sub>SPR</sub>	Synchronous Preset Recovery Time	8		20		25		ns
t <sub>PR</sub>	Power-up Reset Time <sup>[6, 15]</sup>	1		1		1		μS


### **Switching Waveforms**

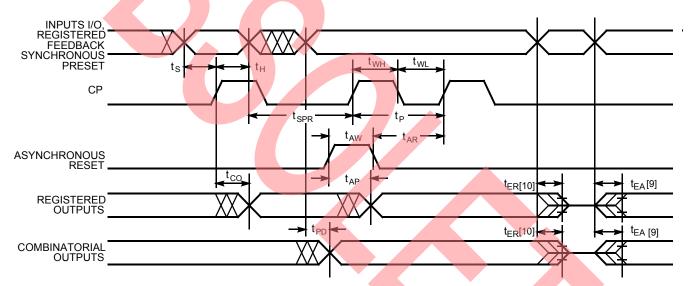

### Power-Up Reset Waveform<sup>[15]</sup>

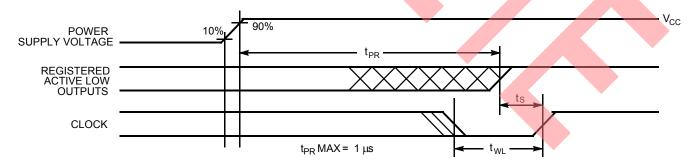

### **Functional Logic Diagram for PALCE22V10**

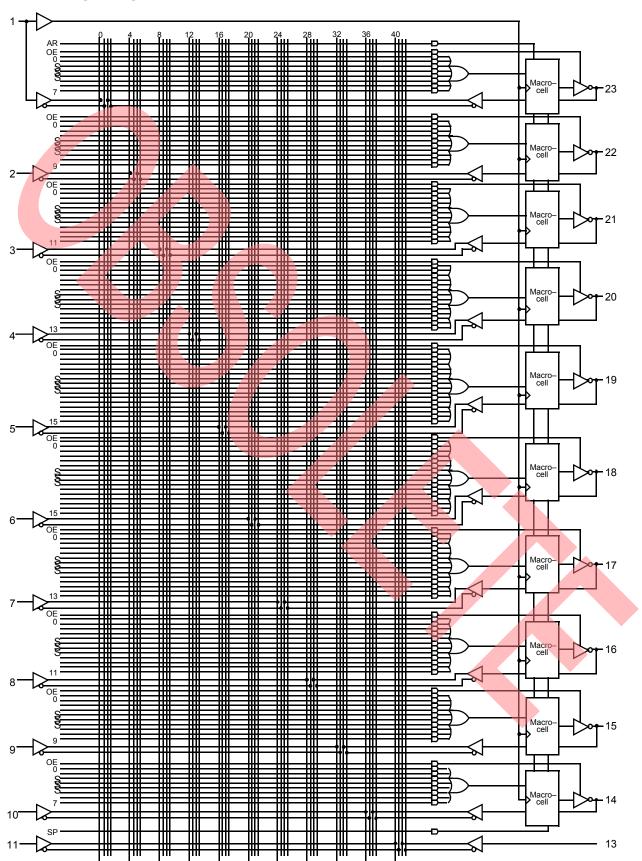

### **Ordering Information**

t <sub>PD</sub> (ns)	t <sub>S</sub> (ns)	t <sub>CO</sub> (ns)	Ordering Code	Package Name	Package Type	Operating Range
5	3	4	PALCE22V10-5PC	P13	24-lead (300 MIL) Molded DIP	Commercial
			PALCE22V10-5JC	J64	28-lead Plastic Leaded Chip Carrier	
7.5	5	5	PALCE22V10-7JC	J64	28-lead Plastic Leaded Chip Carrier	Commercial
			PALCE22V10-7PC	P13	24-lead (300-Mil) Molded DIP	
10	6	7	PALCE22V10-10JC	J64	28-lead Plastic Leaded Chip Carrier	Commercial
			PALCE22V10-10PC	P13	24-lead (300-Mil) Molded DIP	
10	6	7	PALCE22V10-10JI	J64	28-lead Plastic Leaded Chip Carrier	Industrial
			PALCE22V10-10PI	P13	24-lead (300-Mil) Molded DIP	
			PALCE22V10-10LMB 5962-89841063X	L64	28-Square Leadless Chip Carrier	Military
			PALCE22V10-10KMB 5962-8984106KX	K73	24-lead Rectangular Cerpack	
			PALCE22V10-10DMB 5962-8984106LX	D14	24-lead (300 MIL) CerDIP	
15	10	8	PALCE22V10-15JC	J64	28-lead Plastic Leaded Chip Carrier	Commercial
			PALCE22V10-15PC	P13	24-lead (300-Mil) Molded DIP	
15	10	8	PALCE22V10-15KMB 5962-8984102KX	K73	24-lead Rectangular Cerpack	Military
			PALCE22V10-15KMB 5962-8984103KX	K73	24-lead Rectangular Cerpack	
			PALCE22V10-15KMB 5962-8984105KX	K73	24-lead Rectangular Cerpack	
			PALCE22V10-15DMB 5962-8984102LX	D14	24-lead (300 MIL) CerDIP	
			PALCE22V10-15DMB 5962-8984103LX	D14	24-lead (300 MIL) CerDIP	
			PALCE22V10-15LMB 5962-89841033X	L64	28-Square Leadless Chip Carrier	
			PALCE22V10-15LMB 5962-89841053X	L64	28-Square Leadless Chip Carrier	
25	15	15	PALCE22V10-25JC	J64	28-lead Plastic Leaded Chip Carrier	Commercial
			PALCE22V10-25PC	P13	24-lead (300-Mil) Molded DIP	
25	15	15	PALCE22V10-25LMB 5962-89841043X	L64	28-square Leadless Chip Carrier	Military
	7.5 10 15 15 25	(ns) (ns) 5 3 7.5 5 10 6 10 6 10 15 10 15 10	(ns) (ns) (ns) 5 3 4  7.5 5 5  10 6 7  10 6 7  15 10 8  15 10 8	(ns)         (ns)         Ordering Code           5         3         4         PALCE22V10-5PC           PALCE22V10-5JC         PALCE22V10-7JC           PALCE22V10-7PC         PALCE22V10-10JC           10         6         7         PALCE22V10-10JC           PALCE22V10-10PC         PALCE22V10-10JI           PALCE22V10-10PI         PALCE22V10-10LMB         5962-89841063X           PALCE22V10-10LMB         5962-8984106LX           PALCE22V10-10DMB         5962-8984106LX           15         10         8         PALCE22V10-15JC           PALCE22V10-15FC         PALCE22V10-15KMB         5962-8984102KX           PALCE22V10-15KMB         5962-8984103KX           PALCE22V10-15DMB         5962-8984102LX           PALCE22V10-15DMB         5962-8984103XX           PALCE22V10-15LMB         5962-89841033X           PALCE22V10-15LMB         5962-89841033X           PALCE22V10-15LMB         5962-89841053X           25         15         15         PALCE22V10-25JC           PALCE22V10-25LMB	(nš)         (nš)         Ordering Code         Name           5         3         4         PALCE22V10-5PC         P13           PALCE22V10-5JC         J64           7.5         5         PALCE22V10-7JC         J64           PALCE22V10-7PC         P13           10         6         7         PALCE22V10-10JC         J64           PALCE22V10-10PC         P13         J64         PALCE22V10-10JI         J64           PALCE22V10-10PI         P13         PALCE22V10-10LMB         L64         5962-8984106XX           PALCE22V10-10LMB         S962-8984106KX         PALCE22V10-15DC         J64         PALCE22V10-15DC         J64           PALCE22V10-15PC         P13         K73         5962-8984102KX         PALCE22V10-15KMB         K73           S962-8984103KX         PALCE22V10-15KMB         K73         5962-8984103KX         PALCE22V10-15DMB         D14           S962-8984103LX         PALCE22V10-15LMB         D14         5962-8984103LX         PALCE22V10-15LMB         L64           S962-89841053X         PALCE22V10-15LMB         L64         5962-89841053X         L64           25         15         15         PALCE22V10-25JC         P13           25         15	(nis)         (nis)         Ordering Code         Name         Package Type           5         3         4         PALCE22V10-5PC         P13         24-lead (300 MIL) Molded DIP           7.5         5         5         PALCE22V10-7JC         J64         28-lead Plastic Leaded Chip Carrier           PALCE22V10-7PC         P13         24-lead (300-Mil) Molded DIP           10         6         7         PALCE22V10-10JC         J64         28-lead Plastic Leaded Chip Carrier           PALCE22V10-10PC         P13         24-lead (300-Mil) Molded DIP           PALCE22V10-10UJI         J64         28-lead Plastic Leaded Chip Carrier           PALCE22V10-10UMB         S662-8984106XX         PALCE22V10-10LMB         S662-8984106XX           PALCE22V10-10DMB         K73         24-lead Rectangular Cerpack           5962-8984106XX         PALCE22V10-15JC         J64         28-lead Plastic Leaded Chip Carrier           15         10         8         PALCE22V10-15JC         J64         28-lead Plastic Leaded Chip Carrier           15         10         8         PALCE22V10-15KMB         K73         24-lead Rectangular Cerpack           8         PALCE22V10-15KMB         K73         24-lead Rectangular Cerpack           962-8984103KX         PALCE22V

# MILITARY SPECIFICATIONS Group A Subgroup Testing

### **DC Characteristics**

Parameter	Subgroups
V <sub>OH</sub>	1, 2, 3
V <sub>OL</sub>	1, 2, 3
V <sub>IH</sub>	1, 2, 3
V <sub>IL</sub>	1, 2, 3
I <sub>IX</sub>	1, 2, 3
I <sub>OZ</sub>	1, 2, 3


### **DC Characteristics**

Parameter	45	Subgroups
I <sub>CC</sub>		1, 2, 3


### **Switching Characteristics**

Parameter	Subgroups
t <sub>PD</sub>	9, 10, 11
t <sub>co</sub>	9, 10, 11
t <sub>S</sub>	9, 10, 11
t <sub>H</sub>	9, 10, 11

### **Package Diagrams**

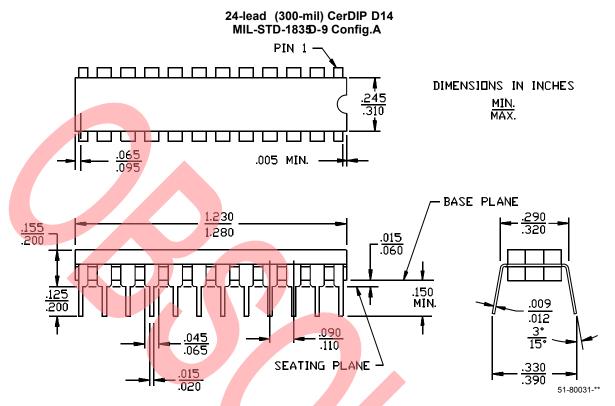


28-lead Plastic Leaded Chip Carrier J64

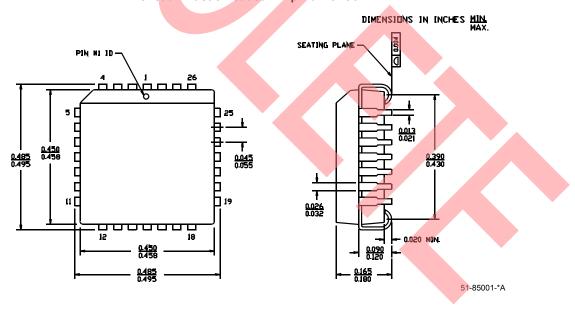


### Package Diagrams (continued)

# **24-Lead Rectangular Cerpack K73** MIL-STD-1835 F-6 Config. A

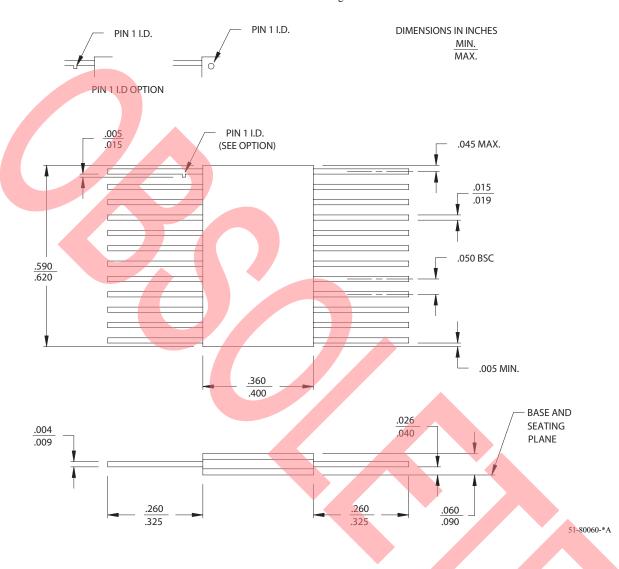

### Package Diagrams (continued)

### 28-Square Leadless Chip Carrier L64 MIL-STD-1835 C-4

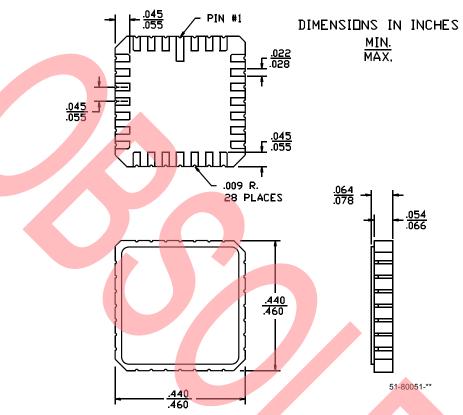

Ultra37000 is a trademark of Cypress Semiconductor Corporation. PAL is a registered trademark of Advanced Micro Devices. All product and company names mentioned in this document are the trademarks of their respective holders.

### **Document History Page**

Document Title: PALCE22V10 Flash-erasable Reprogrammable CMOS PAL® Device Document Number: 38-03027					
REV.	ECN NO.	Issue Date	Orig. of Change	Description of Change	
**	106372	07/11/01	SZV	Change from Spec Number: 38-00447 to 38-03027	
*A	114640	06/25/02	OOR	Added a note on the title page referring all new designs to this device Added Military Part Numbers	
*B	213375	See ECN	FSG	Added note to title page: "Use Ultra37000 For All New Designs"	
*C	2675372	See ECN	AMV	Sunset Review: Obsolete product	

