SmartStart

INTELLIGENT 4G LTE ROUTER & GATEWAY

B+B SMARTWORX

AD\ANTEC

Powered by



- + For industrial IoT and consumer focused high speed data applications
- + Ethernet, serial RS-232 and I/O for connecting a wide array of field assets with DIN rail or wall mounting
- + Low power consumption for solar and battery power applications
- + Exceptionally resilient wireless and wired connection
- + Enhanced memory to host custom software applications and a wide variety of protocols
- + Easy deployment, mass maintenance and troubleshooting with B+B SmartWorx remote management and monitoring tools
- + Loaded with advanced features to secure your data

The SmartStart[™] LTE family of cellular routers and gateways are the perfect way to connect RS-232 and Ethernet devices to a cellular network. Industrial M2M and IoT applications include Ethernet lottery machines, ATM stations, kiosks, gaming terminals along with RS-232 traffic controllers, meters, UPS systems, PLCs and much more.

The processor is powerful enough to handle the full range of LTE communications capabilities, including video streams. The internal memory provides ample storage for custom scripts, software applications and a wide variety of protocols. In addition to its Ethernet and RS-232 ports, SmartStart[™] has built-in digital I/O connectivity. Competing routers in the same price range generally provide only Ethernet or RS-232. StartSmart[™] provides all three.

SmartStart[™] combines best-in-class power consumption with LTE performance and is optimized for solar and battery powered applications. Low Power Mode extends battery life by dropping power consumption to 40 mW, and can be triggered by timers, low voltage detection or I/0. SmartStart[™] is the industry's only cellular gateway with power

consumption equivalent to 2G devices. It is DIN rail and panel mountable. The router supports VPN tunnel creation using various protocols to ensure safe communications. The router provides diagnostic functions which include automatic monitoring of the wireless and wired connections, automatic restart in case of connection losses, and a hardware watchdog that monitors the router status.

SmartStart[™] is an excellent fit for applications that are migrating to LTE technology. SmartStart[™] provides fallback to 3G/2G technologies to ensure that connectivity is reliable in areas where LTE is still under development. This futureproofs your existing installations and protects your investment. You can upgrade your systems according to your own schedule, as SmartStart[™] will continue to connect your legacy devices, even after the cellular providers sunset their 2G and 3G cellular networks.

SmartStart[™] is easy to install using SmartWorx HUB[™], a full featured configuration and monitoring tool. Our VPN configuration tool, SmartCluster[™], makes it easy to configure multiple routers via the same VPN tunnel.

ORDERING INFORMATION - Antennas & Power Supplies Sold Separately

MODEL NO.	- ORDER CODES	NAM* Lte cat.1	EMEA & LATAM LTE CAT.4	1X Ethernet	RS232	I/O	2X SIM	WI-FI	SMARTWORX Hub
	SL30200110	\checkmark		\checkmark	\checkmark	\checkmark	\checkmark		
	SL30210110	\checkmark		\checkmark	\checkmark	\checkmark	\checkmark	\checkmark	
	SL30200110-SWH	\checkmark		\checkmark	\checkmark	\checkmark	\checkmark		\checkmark
	SL30210110-SWH	\checkmark		~	\checkmark	\checkmark	\checkmark	\checkmark	\checkmark
	SL30400110		\checkmark	~	\checkmark	\checkmark	\checkmark		
	SL30410110		\checkmark	\checkmark	\checkmark	\checkmark	\checkmark	\checkmark	
	SL30400110-SWH		\checkmark	~	\checkmark	\checkmark	\checkmark		\checkmark
	SL30410110-SWH		\checkmark	\checkmark	\checkmark	\checkmark	\checkmark	\checkmark	\checkmark

* North America

SmartStart INTELLIGENT 4G LTE ROUTER & GATEWAY



ACCESSORIES · INCLUDED

ORDER CODE	DESCRIPTION
BB-KN-M04-1.5	SmartStart PS cable 4-wire, 1,5m,
SBD25	SmartStart DIN Clip
	Quick Start Guide

ACCESSORIES - SOLD SEPARATELY

ORDER CODE	DESCRIPTION
GA110	Antenna LTE, Magnet Mount
TG30	Antenna LTE, Terminal
AW-A2458G	Antenna Wi-Fi 2.4 & 5.8 GHz
RPS-M04-M	PS, SmartStart, 12V/1A
BB-KN-M04-1.5	PS cable 4-wire, 1,5m, SmartStart
SBD25	DIN Clip - SmartStart

SPECIFICATIONS

NETWORKING	
Network and Routing	DHCP Server, NAT/PAT, VRRP, Dynamic DNS client, DNS proxy, VLAN, QoS, DMVPN, NTP Client/ Server, IGMP, BGP, OSPF, RIP, SMTP, SMTPS, SNMP v1/ v2c/ v3, Backup Routers, PPP, PPPoE, SSL, Port Forwarding, Host Port Routing, Ethernet Bridging
Security	HTTPS, SSH, VPN tunnels, SFTP, DMZ, Firewall (IP Filtering, MAC address filtering, Inbound and outbound Port filtering)
VPN Tunnelling	Open VPN client and server and P2P, L2TP, PPTP, GRE, EasyVPN, IPSec with IKEv1 and IKEv2
Configuration	Web server, SSH, Four configuration switchable profiles, Automatic configuration update from server, Backup configuration, Restore configuration
Firmware Management	Automatic firmware update from server, Locally via LAN or remotely OTA (HTTP, HTTPS), Over-the-Air software updates, Over-the-Air cellular module update from FW
Diagnostic	One CLICK report - current configuration / factory identification / system log / kernel log / reboot log / routing table, Remote diagnostics possible via SSH
Status	Network Status, DHCP Status, IPSec Status, Statistics history for last 60days
Log	System Log, Reboot Log, Kernel Log
Controlling and Diagnostic	SMS, SNMP v1/v2c/v3, Statuses
Event Engine	StartUp script & Up/Down script (Bash, Python), Digital Input, Network Parameters, Data Usage, Timer, Power, Device Temperature. Report Types: RAP, SMS, email, SNMP Trap, TCP (csv, xml, binary)
Other	Support of IPv6

PORTS, LED, ANTENNAS	
Ethernet	RJ45, 10/100 Mbps, 1.5kV RMS
SIM NAM/EMEA	1/2 Mini SIMs (2FF)
LED ndicators	PWR, DAT, WAN, ETH
2x ANT	SMA connectors
WiFi antenna - *optional	R-SMA connector
RS232	DB9 Female
Ι/Ο	1x Digital Input On Voltage: 2.7V to 36VDC (4-Way Molex moni-fit connector)

MECHANICAL	
Plastic case with metal DIN rail	Plastic
Enclosure Dimensions	87x30x127mm (150mm including wall month sides)
Weight	187 g

SUPPORT AND WARRANTY

Limited lifetime warranty, Free device software upgrades.

CELLULAR MODULE PARAMETERS		
	SL304 Cat. 4 - EMEA & LATAM	SL302 Cat. 1 - NAM - AT&T (Verizon Coming Soon)
LTE parameters	Bit rate 150 Mbps (DL) / 50 Mbps (UL) LTE FDD Cat.4, 3GPP release 9 compliant Supported frequencies: 800 / 900 / 1800 / 2100 / 2600 MHz	Bit rate 10 Mbps (DL) / 5 Mbps (UL) LTE FDD Cat.1, 3GPP release 9 compliant Supported bandwidths: 5 Mhz, 10 Mhz, 20 MHz Supported frequencies: 700 / 850 / 1700(AWS) / 1900 MHz
WCDMA Bit rate 42.0 Mbps (DL) / 5.76 Mbps (UL) Supported frequencies: 900 / 2100 MHz		Bit rate 384 kbit/s (DL) / 384 kbit/s (UL) Supported frequencies: 850 / 1900 MHz
GPRS/EDGE parameters	Bit rate 236 kbps (DL) / 236 kbps (UL) Supported frequencies: 900 / 1800 MHz	-

B-B SMARTWORX

Powered by ADVANTECH Downloaded from Arrow.com.

orders@advantech-bb.com / Corporate Headquarters: 707 Dayton Road, PO Box 1040 Ottawa, IL 61350 USA 815-433-5100 Fax 433-5104 support@advantech-bb.com / European Office: Westlink Commercial Park, Oranmore Co. Galway Ireland +353 91 792444 Fax +353 91 792445

SmartStart INTELLIGENT 4G LTE ROUTER & GATEWAY



SPECIFICATIONS - CONTINUED

POWER, CONSUMPTION, ENVIRONMENTAL, IP COVER		
Power Supply	9–36VDC (4-Way Molex moni- fit connector)	
Power Consumptionwith WiFi - Average/Peak/Sleep Mode	2,7 / 5.5 W / 40 mW	
Power Consumption without WiFi - Idle/Average/Peak/Sleep Mode	2,1 / 4.8 W / 40 mW	
Current with WiFi	0.65 A Max	
Current without WiFi	0.55 A Max	
Temperature Range with WiFi – Operating / Storage Temperature Range without WiFi – Operating / Storage	-25 to +55 °C / -40 to +85 °C -40 to +75 °C / -40 to +85 °C	
Humidity – Operating / Storage (noncondensing)	0 to 95 % / 0 to 95 %	
Cold Start	-40 °C	
Operating Altitude	2000 m / 70 kPa	
Enclosure Rating	IP30	

WI-FI				
Antenna Connector	R-SMA – 50 Ohms			
Supported WiFi Band	2.4 GHz - Number of clients: 55			
Standards	802.11b, 802.11g, 802.11n			
Encryption	None, WEP, TKIP, AES			
Authentication	Open, Shared, WPA–PSK, WPA2–PSK, WPA2-Enterprise, 802.1 - RADIUS			
2.4 GHz Supported Channels	1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11			
Type of Device	Access point, Client			


WHIT				
WiFi 802.11 b/g/n, AP or Client operating, Supported WiFi band - 2.4 GHz, Number of clients: 55				
WiFi - Authentication/Cipher	Channel Width [MHz]	Throughput of TCP [Mbps]		
WPA2-PSK/AES, WPA-PSK/AES, none/none	20	40		
	40	60		

INDUSTRY CERTIFICATIONS & APPROVALS	
Emissions/ Immunity	EN 55022, EN 61000-6-2, ETSI EN 301 489-1 V1.9.2, FCC part 15 class B (all pending)
Safety	Hazardous Locations: EN 60950 Power: EN 61131-2 Vehicle Usage: E-Mark Environmental: RoHS, REACH, WEEE

STANDARDS AND REGULATIONS FOR NAM ROUTERS - SL302XXXXX		STANDARDS AN	STANDARDS AND REGULATIONS FOR EMEA ROUTERS - SL304XXXXX	
Industrial	FCC 15.107 Class B, FCC 15.109 Class B, PTCRB, ETSI EN 301 489-1 v1.9.2, IEC 61000-6-2:2005, IEC 61000-6-3:2006	EMC	ETSI EN 301 489-1 v1.9.2, IEC 61000-6-2:2005, IEC 61000-6-3:2006	
		Safetv	EN 60950-1:2006 + A11:2009 + A1:2010 + A12:2011 + A2:2013, EN 62311:2008	
Safety	EN 60950-1:2006 + A11:2009 + A1:2010 + A12:2011 + A2:2013, EN 62311:2008	E8 – EMC for device in transportation		
Carrier Approvals	AT&T		E8 homologation number: 10R – 04 8634	

REACH and RoHS compliant

REACH and RoHS compliant

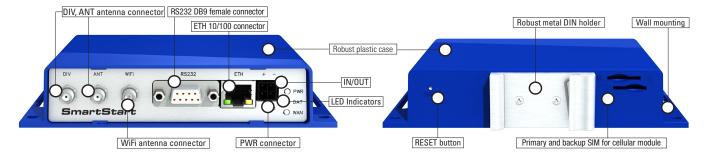

B-B SMARTWORX Powered by AD\ANTECH Downloaded from Arrow.com.

orders@advantech-bb.com

Corporate Headquarters: 707 Dayton Road, PO Box 1040 Ottawa, IL 61350 USA 815-433-5100 Fax 433-5104 support@advantech-bb.com / European Office: Westlink Commercial Park, Oranmore Co. Galway Ireland +353 91 792444 Fax +353 91 792445