



#### BC846AW-BC848CW

#### NPN SMALL SIGNAL TRANSISTOR IN SOT323

#### **Features**

- Ideally Suited for Automatic Insertion
- Complementary PNP Types: BC856W–BC858W
- For Switching and AF Amplifier Applications
- Totally Lead-Free & Fully RoHS Compliant (Notes 1 & 2)
- Halogen and Antimony Free. "Green" Device (Note 3)
- The BC846BWQ–BC847CWQ are suitable for automotive applications requiring specific change control; these parts are AEC-Q101 qualified, PPAP capable, and manufactured in IATF16949 certified facilities.

https://www.diodes.com/quality/product-definitions/


## **Mechanical Data**

- Package: SOT323
- Package Material: Molded Plastic, "Green" Molding Compound UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020
- Terminals: Finish—Matte Tin Plated Leads, Solderable per MIL-STD-202, Method 208 @3
- Weight: 0.006 grams (Approximate)




**SOT323** 

Top View



**Device Symbol** 



Top View Pin-Out

### Ordering Information (Note 4)

Part Number	Compliance	Bookaga	Marking	Bool Size (inches)	Packing		
Part Number	Compliance	Package	Marking	Reel Size (inches)	Qty.	Carrier	
BC846AW-7-F	Standard	SOT323	K1Q	7	3,000	Reel	
BC846BW-7-F	Standard	SOT323	K1R	7	3,000	Reel	
BC846BWQ-7-F	Automotive	SOT323	K1R	7	3,000	Reel	
BC846BW-13-F	Standard	SOT323	K1R	13	10,000	Reel	
BC847AW-7-F	Standard	SOT323	K1Q	7	3,000	Reel	
BC847BW-7-F	Standard	SOT323	K1R	7	3,000	Reel	
BC847BW-13-F	Standard	SOT323	K1R	13	10,000	Reel	
BC847BWQ-13-F	Automotive	SOT323	K1R	13	10,000	Reel	
BC847CW-7-F	Standard	SOT323	K1M	7	3,000	Reel	
BC847CW-13-F	Standard	SOT323	K1M	13	10,000	Reel	
BC847CWQ-7-F	Automotive	SOT323	K1M	7	3,000	Reel	
BC848AW-7-F	Standard	SOT323	K1Q	7	3,000	Reel	
BC848BW-7-F	Standard	SOT323	K1R	7	3,000	Reel	
BC848CW-7-F	Standard	SOT323	K1M	7	3,000	Reel	

Notes: 1. No purposely added lead. Fully EU Directive 2002/95/EC (RoHS), 2011/65/EU (RoHS 2) & 2015/863/EU (RoHS 3) compliant.


2. See https://www.diodes.com/quality/lead-free/ for more information about Diodes Incorporated's definitions of Halogen- and Antimony-free, "Green" and Lead-free.

3. Halogen- and Antimony-free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.

4. For packaging details, go to our website at https://www.diodes.com/design/support/packaging/diodes-packaging/.



### **Marking Information**



XXX = Product Type Marking Code (Please See Ordering Information) YM = Date Code Marking Y or  $\overline{Y}$  = Year (ex: J = 2022) M or  $\overline{M}$  = Month (ex: 2 = February)

Date Code Key

Year	2003		2022	2023	2024	2025	2026	2027	2028	2029	2030	2031
Code	Р		J	К	L	М	Ν	0	Р	R	S	Т
Month	Jan	Feb	Mar	Apr	Мау	Jun	Jul	Aug	Sep	Oct	Nov	Dec

Absolute Maximum Ratings (@TA = +25°C, unless otherwise specified.)

Character	istic	Symbol	Value	Unit
	BC846		80	
Collector-Base Voltage	BC847	Vсво	50	V
	BC848		30	
	BC846		65	
Collector-Emitter Voltage	BC847	VCEO	45	V
	BC848		30	
Emitter-Base Voltage	BC846, BC847		6	V
Emilier-Base voltage	BC848	Vebo	5	v
Continuous Collector Current		lc	100	mA
Peak Collector Current		Ісм	200	mA
Peak Base Current		Івм	200	mA

#### Thermal Characteristics (@TA = +25°C, unless otherwise specified.)

Characteristic		Symbol	Value	Unit
Power Dissipation	(Note 5)	PD	200	mW
Thermal Resistance, Junction to Ambient	(Note 5)	R <sub>0JA</sub>	625	°C/W
Thermal Resistance, Junction to Case	(Note 5)	Rejc	115	°C/W
Operating and Storage Temperature Range	TJ, TSTG	-65 to +150	°C	

## ESD Ratings (Note 6)

Characteristic	Symbol	Value	Unit	JEDEC Class
Electrostatic Discharge - Human Body Model	ESD HBM	4,000	V	3A
Electrostatic Discharge - Machine Model	ESD MM	400	V	С

5. For a device mounted on minimum recommended pad layout 1oz weight copper that is on a single-sided FR4 PCB; device is measured under still air Notes: conditions whilst operating in a steady-state. 6. Refer to JEDEC specification JESD22-A114 and JESD22-A115.




# Electrical Characteristics (@T<sub>A</sub> = +25°C, unless otherwise specified.)

Char	acteristic			Symbol	Min	Тур	Max	Unit	Test Condition	
		В	C846	-	80					
Collector-Base Breakdown Voltage BC847 BC848			<b>BV</b> CBO	50	_	—	V	I <sub>C</sub> = 100μA		
			C848		30					
BC846				65						
Collector-Emitter Breakdown Voltage (Note 7)		BC847		BVCEO	45		—	V	$I_C = 10 mA$	
		В	C848		30					
Emitter-Base Breakdown Vol	tana	BC84	6, BC847	ВVево	6		_	V	I <sub>E</sub> = 100μΑ	
		В	C848	<b>D</b> V EBO	5		_		ΤΕ = 100μΑ	
			А		110	180	220			
DC Current Gain (Note 7)	Current Gain Gro	bup	В	h <sub>FE</sub>	200	290	450		$V_{CE} = 5.0V, I_C = 2.0mA$	
			С		420	520	800			
Collector Cutoff Current				Ісво	—	—	20	nA	V <sub>CB</sub> = 30V	
							5	μA	Vcb = 30V, TA = +150°C	
Collector Emitter Seturation )	(altaga (Nata Z)			VCE(sat)	_	90	250	mV	$I_{C} = 10 \text{mA}, I_{B} = 0.5 \text{mA}$	
Collector-Emitter Saturation	vollage (Note 7)					200	600	mv	I <sub>C</sub> = 100mA, I <sub>B</sub> = 5.0mA	
	- (1)			VBE(on)	580	660	700	mV	$I_C = 2mA$ , $V_{CE} = 5V$	
Base-Emitter Turn-on Voltage	e (Note 7)				_	_	770	mv	Ic = 10mA, Vce = 5V	
Page Emitter Seturation Volt	ogo (Noto 7)			\/		700		mV	$I_{C} = 10 \text{mA}, I_{B} = 0.5 \text{mA}$	
Base-Emitter Saturation Voltage (Note 7)			VBE(sat)	_	900	_	IIIV	Ic = 100mA, I <sub>B</sub> = 5mA		
Output Capacitance				Cobo	—	3	4.5	pF	Vсв = 10V, f = 1.0MHz	
Transition Frequency			f⊤	100	300	_	MHz	V <sub>CE</sub> = 5V, I <sub>C</sub> = 10mA f = 100MHz		
Noise Figure			NF	_	_	10	dB	$\label{eq:Vce} \begin{array}{l} V_{CE} = 5V, \ Ic = 200 \mu A \\ R_{S} = 2k \Omega, \ f = 1kHz \\ \Delta f = 200Hz \end{array}$		

Note: 7. Measured under pulsed conditions. Pulse width  $\leq$  300µs. Duty cycle  $\leq$  2%.



# Typical Electrical Characteristics (@T<sub>A</sub> = +25°C, unless otherwise specified.)

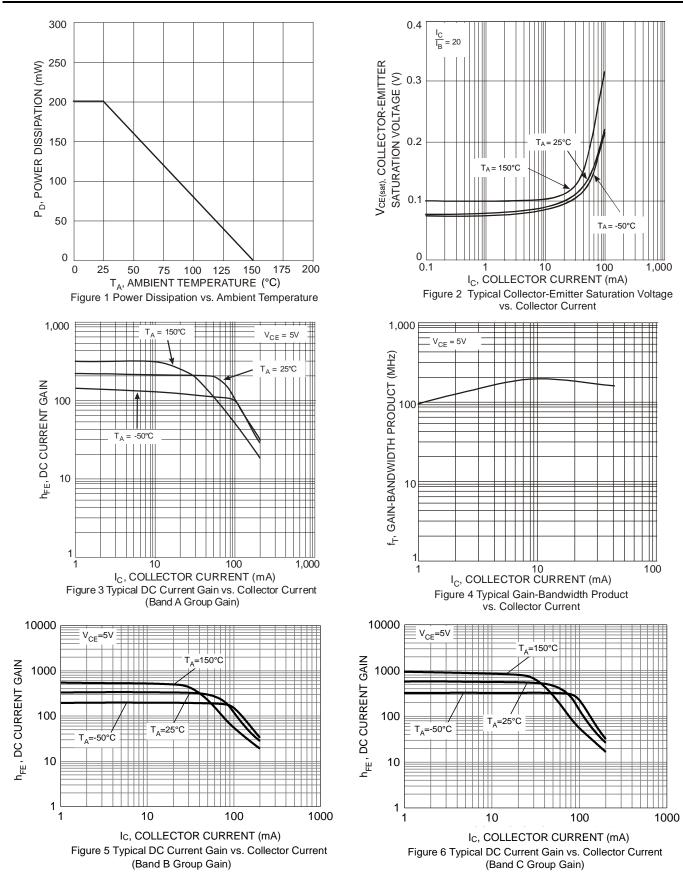


BC846AW-BC848CW Document number: DS30250 Rev. 15 - 2



## **Package Outline Dimensions**

Please see http://www.diodes.com/package-outlines.html for the latest version.


#### SOT323

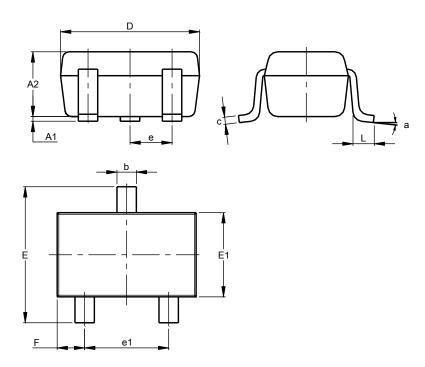

к.									
SOT323									
Dim	Min	Max	Тур						
A1	0.00	0.10	0.05						
A2	0.90	1.00	0.95						
b	0.25	0.40	0.30						
c	0.10	0.18	0.11						
D	1.80	2.20	2.15						
ш	2.00	2.20	2.10						
E1	1.15	1.35	1.30						
е	C	).650 B	SC						
e1	1.20	1.40	1.30						
F	0.375	0.475	0.425						
L	0.25	0.40	0.30						
а	0°	8°							
All	Dimen	sions i	in mm						

# **Suggested Pad Layout**

Please see http://www.diodes.com/package-outlines.html for the latest version.



Dimensions	Value (in mm)
С	0.650
G	1.300
Х	0.470
Y	0.600
Y1	2.500



#### IMPORTANT NOTICE

1. DIODES INCORPORATED AND ITS SUBSIDIARIES ("DIODES") MAKE NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO ANY INFORMATION CONTAINED IN THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).

2. The Information contained herein is for informational purpose only and is provided only to illustrate the operation of Diodes products described herein and application examples. Diodes does not assume any liability arising out of the application or use of this document or any product described herein. This document is intended for skilled and technically trained engineering customers and users who design with Diodes products. Diodes products may be used to facilitate safety-related applications; however, in all instances customers and users are responsible for (a) selecting the appropriate Diodes products for their applications, (b) evaluating the suitability of the Diodes products for their intended applications, (c) ensuring their applications, which incorporate Diodes products, comply the applicable legal and regulatory requirements as well as safety and functional-safety related standards, and (d) ensuring they design with appropriate safeguards (including testing, validation, quality control techniques, redundancy, malfunction prevention, and appropriate treatment for aging degradation) to minimize the risks associated with their applications.

3. Diodes assumes no liability for any application-related information, support, assistance or feedback that may be provided by Diodes from time to time. Any customer or user of this document or products described herein will assume all risks and liabilities associated with such use, and will hold Diodes and all companies whose products are represented herein or on Diodes' websites, harmless against all damages and liabilities.

4. Products described herein may be covered by one or more United States, international or foreign patents and pending patent applications. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks and trademark applications. Diodes does not convey any license under any of its intellectual property rights or the rights of any third parties (including third parties whose products and services may be described in this document or on Diodes' website) under this document.

5 Diodes products are provided subject to Diodes' Standard Terms and Conditions of Sale (https://www.diodes.com/about/company/terms-and-conditions/terms-and-conditions-of-sales/) or other applicable terms. This document does not alter or expand the applicable warranties provided by Diodes. Diodes does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel.

6. Diodes products and technology may not be used for or incorporated into any products or systems whose manufacture, use or sale is prohibited under any applicable laws and regulations. Should customers or users use Diodes products in contravention of any applicable laws or regulations, or for any unintended or unauthorized application, customers and users will (a) be solely responsible for any damages, losses or penalties arising in connection therewith or as a result thereof, and (b) indemnify and hold Diodes and its representatives and agents harmless against any and all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim relating to any noncompliance with the applicable laws and regulations, as well as any unintended or unauthorized application.

7. While efforts have been made to ensure the information contained in this document is accurate, complete and current, it may contain technical inaccuracies, omissions and typographical errors. Diodes does not warrant that information contained in this document is error-free and Diodes is under no obligation to update or otherwise correct this information. Notwithstanding the foregoing, Diodes reserves the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes.

8. Any unauthorized copying, modification, distribution, transmission, display or other use of this document (or any portion hereof) is prohibited. Diodes assumes no responsibility for any losses incurred by the customers or users or any third parties arising from any such unauthorized use.

Copyright © 2022 Diodes Incorporated

www.diodes.com