# Low-Voltage CMOS Hex Inverter

## With 5 V–Tolerant Inputs

The MC74LCX04 is a high performance hex inverter operating from a 2.0 to 5.5 V supply. High impedance TTL compatible inputs significantly reduce current loading to input drivers while TTL compatible outputs offer improved switching noise performance. A V<sub>I</sub> specification of 5.5 V allows MC74LCX04 inputs to be safely driven from 5 V devices if V<sub>CC</sub> is less than 5.0 V.

Current drive capability is 24 mA at the outputs.

## Features

- Designed for 2.0 V to 5.5 V  $V_{CC}$  Operation
- 5 V Tolerant Inputs Interface Capability With 5 V TTL Logic
- LVTTL Compatible
- LVCMOS Compatible
- 24 mA Balanced Output Sink and Source Capability
- Near Zero Static Supply Current (10 µA) Substantially Reduces System Power Requirements
- Latchup Performance Exceeds 500 mA
- ESD Performance: Human Body Model >2000 V; Machine Model >200 V
- NLV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC–Q100 Qualified and PPAP Capable
- These Devices are Pb–Free, Halogen Free/BFR Free and are RoHS Compliant




Figure 1. Logic Diagram




## **ON Semiconductor®**

http://onsemi.com



**PIN ASSIGNMENT** <u>0</u>5 <del>0</del>4 V<sub>CC</sub> A3 <u>0</u>3 A4 A5 14 13 12 11 10 9 8 1 2 3 4 5 6 7 <u>0</u>0 A2 02 GND A0 A1 <u>0</u>1 14-Lead (Top View)

## MARKING DIAGRAMS



## ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 5 of this data sheet.

## MC74LCX04

## PIN NAMES

Pins	Function
An	Data Inputs
Ōn	Outputs

## TRUTH TABLE

An	Ōn
L	H
H	L

## MAXIMUM RATINGS

Symbol	Parameter	Value	Condition	Unit
V <sub>CC</sub>	DC Supply Voltage	-0.5 to +7.0		V
VI	DC Input Voltage	$-0.5 \leq V_l \leq +7.0$		V
Vo	DC Output Voltage	$-0.5 \leq V_O \leq V_{CC} + 0.5$	Output in HIGH or LOW State (Note 1)	V
Ι <sub>ΙΚ</sub>	DC Input Diode Current	-50	V <sub>I</sub> < GND	mA
I <sub>OK</sub>	DC Output Diode Current	-50	V <sub>O</sub> < GND	mA
		+50	V <sub>O</sub> > V <sub>CC</sub>	mA
Ι <sub>Ο</sub>	DC Output Source/Sink Current	±50		mA
I <sub>CC</sub>	DC Supply Current Per Supply Pin	±100		mA
I <sub>GND</sub>	DC Ground Current Per Ground Pin	±100		mA
T <sub>STG</sub>	Storage Temperature Range	-65 to +150		°C
MSL	Moisture Sensitivity		Level 1	

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. I<sub>O</sub> absolute maximum rating must be observed.

## **RECOMMENDED OPERATING CONDITIONS**

Symbol	Pa	rameter	Min	Тур	Max	Unit
V <sub>CC</sub>	Supply Voltage	Operating Data Retention Only	2.0 1.5	2.5, 3.3 2.5, 3.3	5.5 5.5	V
VI	Input Voltage		0		5.5	V
V <sub>O</sub>	Output Voltage	(HIGH or LOW State) (3–State)	0		V <sub>CC</sub>	V
I <sub>OH</sub>	HIGH Level Output Current	$V_{CC} = 3.0 V - 3.6 V$ $V_{CC} = 2.7 V - 3.0 V$ $V_{CC} = 2.3 V - 2.7 V$			-24 -12 -8	mA
I <sub>OL</sub>	LOW Level Output Current	$V_{CC} = 3.0 V - 3.6 V$ $V_{CC} = 2.7 V - 3.0 V$ $V_{CC} = 2.3 V - 2.7 V$			+24 +12 +8	mA
T <sub>A</sub>	Operating Free–Air Temperature		-55		+125	°C
$\Delta t / \Delta V$	Input Transition Rise or Fall Rate	, V <sub>IN</sub> from 0.8 V to 2.0 V, V <sub>CC</sub> = 3.0 V	0		10	ns/V

Functional operation above the stresses listed in the Recommended Operating Ranges is not implied. Extended exposure to stresses beyond the Recommended Operating Ranges limits may affect device reliability.

## MC74LCX04

## DC ELECTRICAL CHARACTERISTICS

			T <sub>A</sub> = −55°C	to +125°C		
Symbol	Characteristic	Condition	Min	Max	Unit	
VIH	HIGH Level Input Voltage (Note 2)	$2.3 \text{ V} \leq \text{V}_{\text{CC}} \leq 2.7 \text{ V}$	1.7		V	
		$2.7 \text{ V} \leq \text{V}_{\text{CC}} \leq 3.6 \text{ V}$	2.0			
VIL	LOW Level Input Voltage (Note 2)	$2.3 \text{ V} \leq \text{V}_{\text{CC}} \leq 2.7 \text{ V}$		0.7	V	
		$2.7 \text{ V} \leq \text{V}_{\text{CC}} \leq 3.6 \text{ V}$		0.8		
V <sub>OH</sub>	HIGH Level Output Voltage	$2.3 \text{ V} \leq \text{V}_{CC} \leq 3.6 \text{ V}; \text{ I}_{OH} = -100 \mu\text{A}$	V <sub>CC</sub> – 0.2		V	
		V <sub>CC</sub> = 2.3 V; I <sub>OH</sub> = -8 mA	1.8			
		$V_{CC} = 2.7 \text{ V}; I_{OH} = -12 \text{ mA}$	2.2			
		$V_{CC} = 3.0 \text{ V}; \text{ I}_{OH} = -18 \text{ mA}$	2.4			
		$V_{CC} = 3.0 \text{ V}; \text{ I}_{OH} = -24 \text{ mA}$	2.2			
V <sub>OL</sub>	LOW Level Output Voltage	$2.3 \text{ V} \leq \text{V}_{CC} \leq 3.6 \text{ V}; \text{ I}_{OL} = 100 \mu\text{A}$		0.2	V	
		V <sub>CC</sub> = 2.3 V; I <sub>OL</sub> = 8 mA		0.6		
		V <sub>CC</sub> = 2.7 V; I <sub>OL</sub> = 12 mA		0.4		
		V <sub>CC</sub> = 3.0 V; I <sub>OL</sub> = 16 mA		0.4		
		$V_{CC} = 3.0 \text{ V}; \text{ I}_{OL} = 24 \text{ mA}$		0.55		
I <sub>OFF</sub>	Power Off Leakage Current	$V_{CC}$ = 0, $V_{IN}$ = 5.5 V or $V_{OUT}$ = 5.5 V		10	μΑ	
I <sub>IN</sub>	Input Leakage Current	$V_{CC}$ = 3.6 V, $V_{IN}$ = 5.5 V or GND		±5	μΑ	
I <sub>CC</sub>	Quiescent Supply Current	$V_{CC}$ = 3.6 V, $V_{IN}$ = 5.5 V or GND		10	μΑ	
$\Delta I_{CC}$	Increase in I <sub>CC</sub> per Input	$2.3 \leq V_{CC} \leq 3.6 \text{ V}; \text{ V}_{IH} = \text{V}_{CC} - 0.6 \text{ V}$		500	μΑ	

2. These values of  $\mathsf{V}_{\mathsf{I}}$  are used to test DC electrical characteristics only.

## AC CHARACTERISTICS (t\_R = t\_F = 2.5 ns; R\_L = 500 $\Omega)$

					Lin	nits			
					T <sub>A</sub> = −55°C	to +125°C			
			V <sub>CC</sub> = 3.3	$V \pm 0.3 V$	V <sub>CC</sub> =	2.7 V	V <sub>CC</sub> = 2.5	$V \pm 0.2 V$	
			C <sub>L</sub> =	50 pF	C <sub>L</sub> =	50 pF	C <sub>L</sub> =	30 pF	
Symbol	Parameter	Waveform	Min	Max	Min	Max	Min	Max	Unit
t <sub>PLH</sub>	Propagation Delay Time	1	1.5	5.2	1.5	6.0	1.5	6.2	ns
t <sub>PHL</sub>	Input to Output		1.5	5.2	1.5	6.0	1.5	6.2	
t <sub>OSHL</sub>	Output-to-Output Skew			1.0					ns
t <sub>OSLH</sub>	(Note 3)			1.0					

 Skew is defined as the absolute value of the difference between the actual propagation delay for any two separate outputs of the same device. The specification applies to any outputs switching in the same direction, either HIGH-to-LOW (t<sub>OSHL</sub>) or LOW-to-HIGH (t<sub>OSLH</sub>); parameter guaranteed by design.

## DYNAMIC SWITCHING CHARACTERISTICS


			T <sub>A</sub> = +25°C			
Symbol	Characteristic	Condition	Min	Тур	Max	Unit
V <sub>OLP</sub>	Dynamic LOW Peak Voltage	$V_{CC}$ = 3.3 V, $C_{L}$ = 50 pF, $V_{IH}$ = 3.3 V, $V_{IL}$ = 0 V		0.8		V
	(Note 4)	$V_{CC}$ = 2.5 V, $C_L$ = 30 pF, $V_{IH}$ = 2.5 V, $V_{IL}$ = 0 V		0.6		V
V <sub>OLV</sub>	Dynamic LOW Valley Voltage	$V_{CC}$ = 3.3 V, $C_{L}$ = 50 pF, $V_{IH}$ = 3.3 V, $V_{IL}$ = 0 V		-0.8		V
	(Note 4)	$V_{CC}$ = 2.5 V, $C_L$ = 30 pF, $V_{IH}$ = 2.5 V, $V_{IL}$ = 0 V		-0.6		V

4. Number of outputs defined as "n". Measured with "n-1" outputs switching from HIGH-to-LOW or LOW-to-HIGH. The remaining output is measured in the LOW state.

## MC74LCX04

## **CAPACITIVE CHARACTERISTICS**


Symbol	Parameter	Condition	Typical	Unit
C <sub>IN</sub>	Input Capacitance	$V_{CC}$ = 3.3 V, $V_{I}$ = 0 V or $V_{CC}$	7	pF
C <sub>OUT</sub>	Output Capacitance	$V_{CC}$ = 3.3 V, $V_{I}$ = 0 V or $V_{CC}$	8	pF
C <sub>PD</sub>	Power Dissipation Capacitance	10 MHz, $V_{CC}$ = 3.3 V, $V_{I}$ = 0 V or $V_{CC}$	25	pF

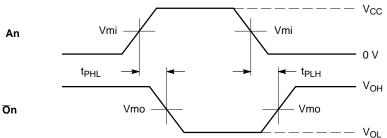

**WAVEFORM 1 – PROPAGATION DELAYS**  $t_R = t_F = 2.5$  ns, 10% to 90%; f = 1 MHz;  $t_W = 500$  ns

	V <sub>CC</sub>				
Symbol	$3.3 \text{ V} \pm 0.3 \text{ V}$	2.7 V	$2.5 \text{ V} \pm 0.2 \text{ V}$		
Vmi	1.5 V	1.5 V	V <sub>CC</sub> /2		
Vmo	1.5 V	1.5 V	V <sub>CC</sub> /2		

Figure 2. AC Waveforms

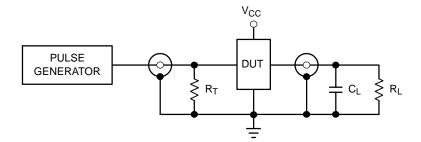

 $\begin{array}{l} C_L = 50 \ \text{pF} \ \text{at} \ V_{CC} = \ 3.3 \pm 0.3 \ \text{V} \ \text{or equivalent (includes jig and probe capacitance)} \\ C_L = \ 30 \ \text{pF} \ \text{at} \ V_{CC} = \ 2.5 \pm 0.2 \ \text{V} \ \text{or equivalent (includes jig and probe capacitance)} \\ R_L = \ R_1 = 500 \ \Omega \ \text{or equivalent} \\ R_T = \ Z_{OUT} \ \text{of pulse generator (typically 50 } \Omega) \end{array}$ 

Figure 3. Test Circuit

## **ORDERING INFORMATION**

Device	Package	Shipping <sup>†</sup>
MC74LCX04DG	SOIC-14 NB (Pb-Free)	55 Units / Rail
MC74LCX04DR2G	SOIC-14 NB (Pb-Free)	2500 Tape & Reel
MC74LCX04DTG	TSSOP-14 (Pb-Free)	96 Units / Rail
MC74LCX04DTR2G	TSSOP-14 (Pb-Free)	2500 Tape & Reel
NLV74LCX04DTR2G*	TSSOP-14 (Pb-Free)	2500 Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.
\*NLV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC–Q100 Qualified and PPAP Capable





\*For additional information on our Pb–Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

## **STYLES ON PAGE 2**

DOCUMENT NUMBER:	98ASB42565B	Electronic versions are uncontrolled except when accessed directly from Printed versions are uncontrolled except when stamped "CONTROLLED 0			
DESCRIPTION:	SOIC-14 NB		PAGE 1 OF 2		
ON Semiconductor and ()) are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.					

#### SOIC-14 CASE 751A-03 ISSUE L

## DATE 03 FEB 2016

STYLE 1: PIN 1. COMMON CATHODE 2. ANODE/CATHODE 3. ANODE/CATHODE 4. NO CONNECTION 5. ANODE/CATHODE 6. NO CONNECTION 7. ANODE/CATHODE 8. ANODE/CATHODE 9. ANODE/CATHODE 10. NO CONNECTION 11. ANODE/CATHODE 12. ANODE/CATHODE 13. NO CONNECTION 14. COMMON ANODE	STYLE 2: CANCELLED	STYLE 3: PIN 1. NO CONNECTION 2. ANODE 3. ANODE 4. NO CONNECTION 5. ANODE 6. NO CONNECTION 7. ANODE 8. ANODE 9. ANODE 10. NO CONNECTION 11. ANODE 12. ANODE 13. NO CONNECTION 14. COMMON CATHODE	STYLE 4: PIN 1. NO CONNECTION 2. CATHODE 3. CATHODE 4. NO CONNECTION 5. CATHODE 6. NO CONNECTION 7. CATHODE 8. CATHODE 10. NO CONNECTION 11. CATHODE 12. CATHODE 13. NO CONNECTION 14. COMMON ANODE
STYLE 5: PIN 1. COMMON CATHODE 2. ANODE/CATHODE 3. ANODE/CATHODE 4. ANODE/CATHODE 5. ANODE/CATHODE 6. NO CONNECTION 7. COMMON ANODE 8. COMMON CATHODE 10. ANODE/CATHODE 11. ANODE/CATHODE 12. ANODE/CATHODE 13. NO CONNECTION 14. COMMON ANODE	STYLE 6: PIN 1. CATHODE 2. CATHODE 3. CATHODE 4. CATHODE 5. CATHODE 6. CATHODE 7. CATHODE 8. ANODE 9. ANODE 10. ANODE 11. ANODE 12. ANODE 13. ANODE 14. ANODE	STYLE 7: PIN 1. ANODE/CATHODE 2. COMMON ANODE 3. COMMON CATHODE 4. ANODE/CATHODE 5. ANODE/CATHODE 6. ANODE/CATHODE 8. ANODE/CATHODE 9. ANODE/CATHODE 10. ANODE/CATHODE 11. COMMON CATHODE 12. COMMON ANODE 13. ANODE/CATHODE 14. ANODE/CATHODE	STYLE 8: PIN 1. COMMON CATHODE 2. ANODE/CATHODE 3. ANODE/CATHODE 4. NO CONNECTION 5. ANODE/CATHODE 6. ANODE/CATHODE 7. COMMON ANODE 9. ANODE/CATHODE 10. ANODE/CATHODE 11. NO CONNECTION 12. ANODE/CATHODE 13. ANODE/CATHODE 14. COMMON CATHODE

DOCUMENT NUMBER:	98ASB42565B	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.			
DESCRIPTION:	SOIC-14 NB		PAGE 2 OF 2		
ON Semiconductor and M are trademarks of Semiconductor Components Industries 11 C dba ON Semiconductor or its subsidiaries in the United States and/or other countries					

ON Semiconductor and united states and/or other countries. LC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.





may or may not be present.

DOCUMENT NUMBER:	98ASH70246A	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.		
DESCRIPTION:	TSSOP-14 WB		PAGE 1 OF 1	
ON Semiconductor and ()) are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the				

DIMENSIONS: MILLIMETERS

© Semiconductor Components Industries, LLC, 2019

onsemi, ONSEMI, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and calcular performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

#### PUBLICATION ORDERING INFORMATION

#### LITERATURE FULFILLMENT:

#### TECHNICAL SUPPORT

onsemi Website: www.onsemi.com

Email Requests to: orderlit@onsemi.com

North American Technical Support: Voice Mail: 1 800-282-9855 Toll Free USA/Canada Phone: 011 421 33 790 2910

Europe, Middle East and Africa Technical Support: Phone: 00421 33 790 2910 For additional information, please contact your local Sales Representative