
# TinyLogic ULP-A Triple Buffer

# NC7NP34

The NC7NP34 is a triple buffer in tiny footprint packages. The device is designed to operate for  $V_{CC}$  = 0.9 V to 3.6 V.

#### **Features**

- $\bullet\,$  Designed for 0.9 V to 3.6 V  $V_{CC}$  Operation
- 2.7 ns t<sub>PD</sub> at 3.3 V (Typ)
- Inputs/Outputs Over-Voltage Tolerant up to 3.6 V
- I<sub>OFF</sub> Supports Partial Power Down Protection
- Source/Sink 2.6 mA at 3.3 V
- Available in US8 and MicroPak™ Packages
- These Devices are Pb–Free, Halogen Free/BFR Free and are RoHS Compliant






Figure 1. Pinout Diagrams (Top Views)




Figure 2. Logic Symbol

# ON

# ON Semiconductor®

www.onsemi.com

#### MARKING DIAGRAMS



UQFN8 1.6X1.6, 0.5P CASE 523AY





US8 CASE 846AN



CC,XXX = Specific Device Code

KK = 2-Digit Date Code Traceability Code

XY = 2-Digit Date Code Format
Z = Assembly Plant Code
A = Assembly Site
L = Wafer Lot Number
YW = Assembly Start Week

#### **ORDERING INFORMATION**

See detailed ordering, marking and shipping information on page 6 of this data sheet.

#### **PIN ASSIGNMENT**

Pin	US8	UQFN8
1	A1	Y1
2	Y3	А3
3	A2	Y2
4	GND	GND
5	Y2	A2
6	А3	Y3
7	Y1	A1
8	$V_{CC}$	$V_{CC}$

#### **FUNCTION TABLE**

A Input	Y Output
L	L
Н	Н

1

#### **MAXIMUM RATINGS**

Symbol	Cha	racteristics	Value	Unit
V <sub>CC</sub>	DC Supply Voltage		-0.5 to +4.3	V
V <sub>IN</sub>	DC Input Voltage		-0.5 to +4.3	V
V <sub>OUT</sub>	DC Output Voltage	Active-Mode (High or Low State) Tri-State Mode (Note 1) Power-Down Mode (V <sub>CC</sub> = 0 V)	-0.5 to V <sub>CC</sub> + 0.5 -0.5 to +4.3 -0.5 to +4.3	V
I <sub>IK</sub>	DC Input Diode Current	V <sub>IN</sub> < GND	-50	mA
I <sub>OK</sub>	DC Output Diode Current	V <sub>OUT</sub> < GND	-50	mA
I <sub>OUT</sub>	DC Output Source/Sink Current		±50	mA
I <sub>CC</sub> or I <sub>GND</sub>	DC Supply Current per Supply Pin or	Ground Pin	±50	mA
T <sub>STG</sub>	Storage Temperature Range		-65 to +150	°C
TL	Lead Temperature, 1 mm from Case	for 10 Seconds	260	°C
TJ	Junction Temperature Under Bias		+150	°C
$\theta_{\sf JA}$	Thermal Resistance (Note 2)	US8 MicroPak	250 210	°C/W
P <sub>D</sub>	Power Dissipation in Still Air	US8 MicroPak	500 595	mW
MSL	Moisture Sensitivity		Level 1	-
F <sub>R</sub>	Flammability Rating	Oxygen Index: 28 to 34	UL 94 V-0 @ 0.125 in	-
V <sub>ESD</sub>	ESD Withstand Voltage (Note 3)	Human Body Model Charged Device Model	2000 1000	V
I <sub>Latchup</sub>	Latchup Performance (Note 4)		±100	mA

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

- Applicable to devices with outputs that may be tri-stated.
   Measured with minimum pad spacing on an FR4 board, using 10 mm-by-1 inch, 2 ounce copper trace no air flow per JESD51-7.
   HBM tested to EIA / JESD22-A114-A. CDM tested to JESD22-C101-A. JEDEC recommends that ESD qualification to EIA/JESD22-A115A (Machine Model) be discontinued.
- 4. Tested to EIA/JESD78 Class II.

### RECOMMENDED OPERATING CONDITIONS

Symbol	Paran	Min	Max	Unit	
V <sub>CC</sub>	Positive DC Supply Voltage		0.9	3.6	V
V <sub>IN</sub>	DC Input Voltage		0	3.6	V
V <sub>OUT</sub>	DC Output Voltage	Active–Mode (High or Low State) Tri–State Mode (Note 1) Power–Down Mode ( $V_{CC} = 0 \text{ V}$ )	0 0 0	V <sub>CC</sub> 3.6 3.6	
T <sub>A</sub>	Operating Temperature Range		-40	+85	°C
t <sub>r</sub> , t <sub>f</sub>	Input Transition Rise and Fall Time	$V_{CC} = 3.3 \text{ V} \pm 0.3 \text{ V}$	0	10	ns/V

Functional operation above the stresses listed in the Recommended Operating Ranges is not implied. Extended exposure to stresses beyond the Recommended Operating Ranges limits may affect device reliability.

# DC ELECTRICAL CHARACTERISTICS

				т	A = 25°	С	T <sub>A</sub> = -40°0	C to +85°C	
Symbol	Parameter	Condition	V <sub>CC</sub> (V)	Min	Тур	Max	Min	Max	Uni
$V_{IH}$	High-Level Input		0.9	_	0.5	_	-	-	V
	Voltage		1.1 to 1.3	0.65 x V <sub>CC</sub>	-	-	0.65 x V <sub>CC</sub>	-	
			1.4 to 1.6	0.65 x V <sub>CC</sub>	-	-	0.65 x V <sub>CC</sub>	-	
			1.65 to 1.95	0.65 x V <sub>CC</sub>	-	-	0.65 x V <sub>CC</sub>	-	
			2.3 to 2.7	1.6	-	-	1.6	-	
			3.0 to 3.6	2.1	-	-	2.1	-	
$V_{IL}$	Low-Level Input		0.9	-	0.5	-	-	-	٧
	Voltage		1.1 to 1.3	_	-	0.35 x V <sub>CC</sub>	-	0.35 x V <sub>CC</sub>	
			1.4 to 1.6	-	-	0.35 x V <sub>CC</sub>	-	0.35 x V <sub>CC</sub>	
			1.65 to 1.95	_	-	0.35 x V <sub>CC</sub>	-	0.35 x V <sub>CC</sub>	
			2.3 to 2.7	-	-	0.7	-	0.7	
			3.0 to 3.6	_	-	0.9	-	0.9	
V <sub>OH</sub>	High-Level Output	$V_{IN} = V_{IH}$ or $V_{IL}$							٧
	Voltage	I <sub>OH</sub> = -20 μA	0.9	-	V <sub>CC</sub> - 0.1	-	-	-	
			1.1 to 1.3	V <sub>CC</sub> - 0.1	_	_	V <sub>CC</sub> - 0.1	-	
			1.4 to 1.6	V <sub>CC</sub> - 0.1	-	-	V <sub>CC</sub> - 0.1	-	
			1.65 to 1.95	V <sub>CC</sub> - 0.1	-	-	V <sub>CC</sub> - 0.1	-	
			2.3 to 2.7	V <sub>CC</sub> - 0.1	_	-	V <sub>CC</sub> - 0.1	-	
			3.0 to 3.6	V <sub>CC</sub> - 0.1	-	-	V <sub>CC</sub> - 0.1	-	
		$I_{OH} = -0.5 \text{ mA}$	1.1 to 1.3	0.75 x V <sub>CC</sub>	-	-	0.70 x V <sub>CC</sub>	-	
		I <sub>OH</sub> = -1 mA	1.4 to 1.6	1.07	-	-	0.99	-	
		$I_{OH} = -1.5 \text{ mA}$	1.65 to 1.95	1.24	_	-	1.22	-	
		$I_{OH} = -2.1 \text{ mA}$	2.3 to 2.7	1.95	-	-	1.87	-	
		$I_{OH} = -2.6 \text{ mA}$	3.0 to 3.6	2.61	_	_	2.55	-	
$V_{OL}$	Low-Level Output	$V_{IN} = V_{IH}$ or $V_{IL}$							\
	Voltage	I <sub>OL</sub> = 20 μA	0.9	-	0.1	-	-	-	
			1.1 to 1.3	-	_	0.1	-	0.1	
			1.4 to 1.6	-	-	0.1	-	0.1	
			1.65 to 1.95	-	_	0.1	_	0.1	
			2.3 to 2.7	-	-	0.1	-	0.1	
			3.0 to 3.6	-	_	0.1	_	0.1	
		$I_{OL} = 0.5 \text{ mA}$	1.1 to 1.3	_	-	0.3 x V <sub>CC</sub>	-	0.3 x V <sub>CC</sub>	
		I <sub>OL</sub> = 1 mA	1.4 to 1.6	-	-	0.31	-	0.37	
		I <sub>OL</sub> = 1.5 mA	1.65 to 1.95	-	-	0.31	-	0.35	
		I <sub>OL</sub> = 2.1 mA	2.3 to 2.7	_	_	0.31	-	0.33	
		I <sub>OL</sub> = 2.6 mA	3.0 to 3.6	-	-	0.31	-	0.33	
I <sub>IN</sub>	Input Leakage Current	V <sub>IN</sub> = 0 V to 3.6 V	0.9 to 3.6	-	-	±0.1	-	±0.5	μ/
I <sub>OFF</sub>	Power Off Leakage Current	V <sub>IN</sub> = 0 V to 3.6 V or V <sub>OUT</sub> = 0 V to 3.6 V	0	_	-	0.5	-	0.5	μ
I <sub>CC</sub>	Quiescent Supply Current	V <sub>IN</sub> = V <sub>CC</sub> or GND	0.9 to 3.6	_	-	0.9	-	0.9	μ

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.


#### **AC ELECTRICAL CHARACTERISTICS**

				7	Γ <sub>A</sub> = 25°(	)	T <sub>A</sub> = -40°C	C to +85°C	
Symbol	Parameter	Condition	V <sub>CC</sub> (V)	Min	Тур	Max	Min	Max	Unit
t <sub>PLH</sub> , t <sub>PHL</sub>	Propagation Delay,	$R_L = 1 \text{ M}\Omega$ , $C_L = 10 \text{ pF}$	0.9	-	45.0	-	-	-	ns
	A to Y (Figures 3 and 4)		1.10 to 1.30	-	11.9	25.9	-	34.3	
	,		1.40 to 1.60	-	6.2	14.8	_	15.0	
			1.65 to 1.95	-	4.4	12.0	_	12.2	
			2.3 to 2.7	-	3.3	9.4	-	9.9	
			3.0 to 3.6	-	2.7	8.3	-	9.0	
t <sub>PLH</sub> , t <sub>PHL</sub>	Propagation Delay,	$R_L = 1 M\Omega$ , $C_L = 15 pF$	0.9	-	46.6	-	-	-	ns
	A to Y (Figures 3 and 4)		1.10 to 1.30	-	12.5	27.3	-	37.3	
	,		1.40 to 1.60	-	6.7	15.5	_	16.5	
			1.65 to 1.95	-	4.8	12.6	-	13.6	
			2.3 to 2.7	-	3.5	9.9	_	10.8	
			3.0 to 3.6	-	2.9	8.7	-	9.5	
t <sub>PLH</sub> , t <sub>PHL</sub>	Propagation Delay,	$R_L = 1 \text{ M}\Omega$ , $C_L = 30 \text{ pF}$	0.9	-	51.3	-	_	-	ns
	A to Y (Figures 3 and 4)		1.10 to 1.30	-	14.5	31.6	-	46.3	
	,		1.40 to 1.60	-	8.2	17.8	-	18.2	
			1.65 to 1.95	-	5.9	14.4	-	15.9	
			2.3 to 2.7	-	4.2	11.3	-	12.8	
			3.0 to 3.6	-	3.4	9.2	-	10.7	

#### **CAPACITIVE CHARACTERISTICS**

Symbol	Parameter	Test Condition	Typical (T <sub>A</sub> = 25°C)	Unit
C <sub>IN</sub>	Input Capacitance	V <sub>CC</sub> = 0 V	2.0	pF
C <sub>OUT</sub>	Output Capacitance	V <sub>CC</sub> = 0 V	4.0	pF
C <sub>PD</sub>	Power Dissipation Capacitance (Note 5)	$f = 10 \text{ MHz}, V_{CC} = 0.9 \text{ to } 3.6 \text{ V}, V_{IN} = 0 \text{ V or } V_{CC}$	6.0	pF

<sup>5.</sup> C<sub>PD</sub> is defined as the value of the internal equivalent capacitance which is calculated from the operating current consumption without load. Average operating current can be obtained by the equation I<sub>CC(OPR)</sub> = C<sub>PD</sub> • V<sub>CC</sub> • f<sub>in</sub> + I<sub>CC</sub>. C<sub>PD</sub> is used to determine the no–load dynamic power consumption: P<sub>D</sub> = C<sub>PD</sub> • V<sub>CC</sub><sup>2</sup> • f<sub>in</sub> + I<sub>CC</sub> • V<sub>CC</sub>.




Test	Switch Position
t <sub>PLH</sub> / t <sub>PHL</sub>	Open
t <sub>PLZ</sub> / t <sub>PZL</sub>	2 x V <sub>CC</sub>
t <sub>PHZ</sub> / t <sub>PZH</sub>	GND

C<sub>L</sub> includes probe and jig capacitance

 $R_T$  is  $Z_{OUT}$  of pulse generator (typically 50  $\Omega$ ) f=1 MHz

Figure 3. Test Circuit

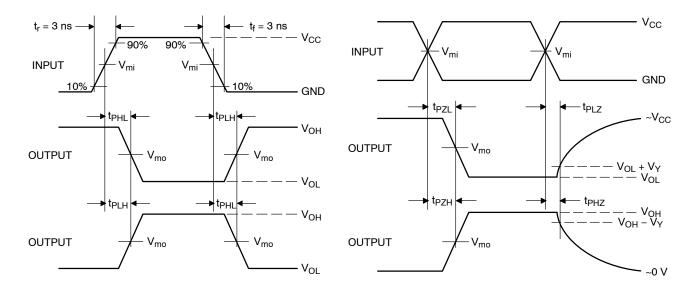

V <sub>CC</sub> , V	V <sub>mi</sub> , V	V <sub>mo</sub> , V	V <sub>Y</sub> , V
0.9	V <sub>CC</sub> /2	V <sub>CC</sub> /2	0.1
1.1 to 1.3	V <sub>CC</sub> /2	V <sub>CC</sub> /2	0.1
1.4 to 1.6	V <sub>CC</sub> / 2	V <sub>CC</sub> / 2	0.1
1.65 to 1.95	V <sub>CC</sub> / 2	V <sub>CC</sub> / 2	0.15
2.3 to 2.7	V <sub>CC</sub> / 2	V <sub>CC</sub> / 2	0.15
3.0 to 3.6	1.5	1.5	0.3

Figure 4. Switching Waveforms

#### **ORDERING INFORMATION**


Device	Package	Marking	Pin 1 Orientation (See below)	Shipping <sup>†</sup>
NC7NP34K8X	US8	NP34	Q4	3000 / Tape & Reel
NC7NP34L8X	MicroPak, UQFN8	X7	Q4	5000 / Tape & Reel

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

# Pin 1 Orientation in Tape and Reel

# Direction of Feed








MicroPak is trademark of Semiconductor Components Industries, LLC (SCILLC) or its subsidiaries in the United States and/or other countries.


UQFN8 1.6X1.6, 0.5P CASE 523AY ISSUE O

**DATE 31 AUG 2016** 

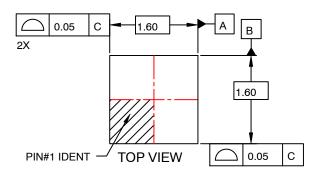

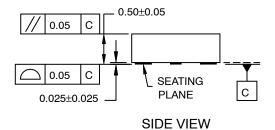

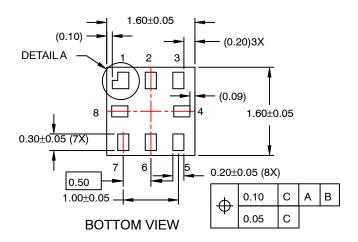




RECOMMENDED LAND PATTERN

#### NOTES:

- A. PACKAGE CONFORMS TO JEDEC MO-255 VARIATION UAAD.
- B. DIMENSIONS ARE IN MILLIMETERS.
- C. DIMENSIONS AND TOLERANCES PER ASME Y14.5M, 2009.
- D. LAND PATTERN RECOMMENDATION IS EXISTING INDUSTRY LAND PATTERN.





DOCUMENT NUMBER:	DOCUMENT NUMBER: 98AON13591G Electronic versions are uncontrolled except when accessed directly from the Document of the Docum				
DESCRIPTION:	UQFN8 1.6X1.6, 0.5P		PAGE 1 OF 1		

ON Semiconductor and a re trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.


US8 CASE 846AN ISSUE O

**DATE 31 DEC 2016** 

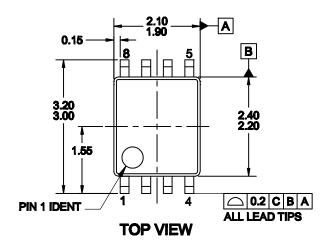




# **RECOMMENDED LAND PATTERN**

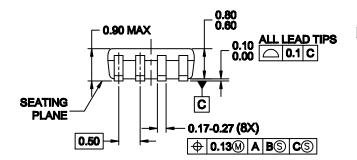


# **NOTES:**

- A. CONFORMS TO JEDEC REGISTRATION MO-187
- **B. DIMENSIONS ARE IN MILLIMETERS.**
- C. DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH, AND TIE BAR EXTRUSIONS.
- D. DIMENSIONS AND TOLERANCES PER ANSI Y14.5M, 1994.

# **SIDE VIEW**

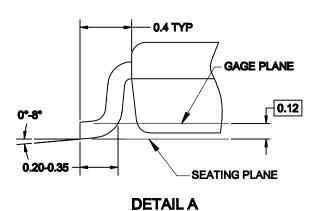

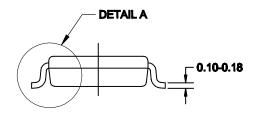

DOCUMENT NUMBER:	98AON13778G	Electronic versions are uncontrolled except when accessed directly from Printed versions are uncontrolled except when stamped "CONTROLLED (	
DESCRIPTION:	US8		PAGE 1 OF 1

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.

onsemi, ONSEMi., and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at <a href="www.onsemi.com/site/pdf/Patent-Marking.pdf">www.onsemi.com/site/pdf/Patent-Marking.pdf</a>. Onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any EDA class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer p

#### **PUBLICATION ORDERING INFORMATION**

LITERATURE FULFILLMENT: Email Requests to: orderlit@onsemi.com

onsemi Website: www.onsemi.com

TECHNICAL SUPPORT North American Technical Support: Voice Mail: 1 800-282-9855 Toll Free USA/Canada Phone: 011 421 33 790 2910

Europe, Middle East and Africa Technical Support:

Phone: 00421 33 790 2910

For additional information, please contact your local Sales Representative