

# 24AA01/24LC01B/24FC01

# 1K I<sup>2</sup>C Serial EEPROM

#### **Device Selection Table**

Part Number	Vcc Range	Max. Clock Frequency	Temp. Ranges	Available Packages
24AA01	1.7V-5.5V	400 kHz <sup>(1)</sup>	I	MC, MS, P, LT, SN, OT, MNY, ST
24LC01B	2.5V-5.5V	400 kHz	I, E	MC, MS, P, LT, SN, OT, MNY, ST
24FC01	1.7V-5.5V	1 MHz	I, E	MS, P, SN, OT, ST, Q4B, Q6B

**Note 1:** 100 kHz for Vcc < 2.5V

#### Features

- Single Supply with Operation down to 1.7V for 24AA01 and 24FC01 Devices, 2.5V for 24LC01B Devices
- Low-Power CMOS Technology:
  - Read current 1 mA, maximum
- Standby current 1 μA, maximum (I-temp.)
- Two-Wire Serial Interface, I<sup>2</sup>C Compatible
- Schmitt Trigger Inputs for Noise Suppression
- Output Slope Control to Eliminate Ground Bounce
- 100 kHz, 400 kHz and 1 MHz Compatibility
- Page Write Time: 5 ms, Maximum
- Self-Timed Erase/Write Cycle
- 8-Byte Page Write Buffer
- Hardware Write-Protect
- ESD Protection >4,000V
- More than 1 Million Erase/Write Cycles
- Data Retention >200 Years
- Factory Programming Available
- RoHS Compliant
- Temperature Ranges:
  - Industrial (I): -40°C to +85°C
  - Extended (E): -40°C to +125°C
- Automotive AEC-Q100 Qualified

# Packages:


 8-Lead DFN, 8-Lead MSOP, 8-Lead PDIP, 5-Lead SC-70, 8-Lead SOIC, 5-Lead SOT-23, 8-Lead TDFN, 8-Lead TSSOP, 8-Lead UDFN and 8-Lead Wettable Flanks UDFN

#### Description


The Microchip Technology Inc.  $24XX01^{(1)}$  is a 1-Kbit Electrically Erasable PROM (EEPROM). The device is organized as one block of 128 x 8-bit memory with a two-wire serial interface. Its low-voltage design permits operation down to 1.7V with standby and active currents of only 1  $\mu$ A and 1 mA, respectively. The 24XX01 also has a page write capability for up to 8 bytes of data.

**Note 1:** 24XX01 is used in this document as a generic part number for the 24AA01/24LC01B/24FC01 devices.

#### **Package Types**



# **Block Diagram**



# 1.0 ELECTRICAL CHARACTERISTICS

# Absolute Maximum Ratings (†)

Vcc	6.5V
All inputs and outputs w.r.t. Vss	-0.3V to Vcc +1.0V
Storage temperature	65°C to +150°C
Ambient temperature with power applied	-40°C to +125°C
ESD protection on all pins	≥4 kV

**† NOTICE:** Stresses above those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at those or any other conditions above those indicated in the operational listings of this specification is not implied. Exposure to maximum rating conditions for extended periods may affect device reliability.

DC CHA		STICS	Industrial (I): $TA = -40^{\circ}C$ to $+85^{\circ}C$ , $Vcc = +1.7V$ to $+5.5V$ Extended (E): $TA = -40^{\circ}C$ to $+125^{\circ}C$ , $Vcc = +2.5V$ to $+5.5V$ (24LC01B) Extended (E): $TA = -40^{\circ}C$ to $+125^{\circ}C$ , $Vcc = +1.7V$ to $+5.5V$ (24FC01)							
Param. No.	Symbol	Characteristic	Min.	Тур.	Max.	Units	Conditions			
D1	Vін	High-Level Input Voltage	0.7 Vcc	_	—	V				
D2	VIL	Low-Level Input Voltage	—	_	0.3 Vcc	V				
D3	VHYS	Hysteresis of Schmitt Trigger Inputs	0.05 Vcc	_	—	V	Note 1			
D4	Vol	Low-Level Output Voltage	—	_	0.40	V	IOL = 3.0 mA, VCC = 2.5V			
D5	ΙLI	Input Leakage Current	—		±1	μA	VIN = Vss or Vcc			
D6	Ilo	Output Leakage Current	—		±1	μA	Vout = Vss or Vcc			
D7	Cin, Cout	Pin Capacitance (all inputs/outputs)	—		10	pF	Vcc = 5.0V ( <b>Note 1</b> ) TA = +25°C, FcLK = 1 MHz			
D8	ICCWRITE	Operating Current	—		3	mA	Vcc = 5.5V, SCL = 400 kHz			
D9	ICCREAD		—	_	1	mA	Vcc = 5.5V, SCL = 400 kHz			
			—	—	1	μA	SDA = SCL = Vcc WP = V <sub>SS</sub> , I-Temp.			
D10	lccs	ccs Standby Current	_	_	3	μA	SDA = SCL = Vcc WP = V <sub>SS</sub> , E-Temp. ( <b>24FC01</b> )			
					5	μA	SDA = SCL = Vcc WP = V <sub>SS</sub> , E-Temp. ( <b>24LC01B</b> )			

#### TABLE 1-1: DC CHARACTERISTICS

**Note 1:** This parameter is periodically sampled and not 100% tested.

#### TABLE 1-2: AC CHARACTERISTICS

AC CHA	ARACTER	ISTICS	Industrial (I): TA = -40°C to +85°C, Vcc = +1.7V to +5.5V Extended (E): TA = -40°C to +125°C, Vcc = +2.5V to +5.5V (24LC01B) Extended (E): TA = -40°C to +125°C, Vcc = +1.7V to +5.5V (24FC01)							
Param. No.	Symbol	Characteristic	Min.	Тур.	Max.	Units	Conditions			
				—	400	kHz	2.5V ≤ Vcc ≤ 5.5V			
1	FCLK	Clock Frequency	—	_	100	kHz	1.7V ≤ Vcc < 2.5V ( <b>24AA01</b> )			
			—	—	1000	kHz	1.7V ≤ Vcc ≤ 5.5V ( <b>24FC01</b> )			
			600	—	—	ns	$2.5V \le Vcc \le 5.5V$			
2	Thigh	Clock High Time	4000	—	—	ns	1.7V ≤ Vcc < 2.5V ( <b>24AA01</b> )			
			260	—	_	ns	1.7V ≤ Vcc ≤ 5.5V ( <b>24FC01</b> )			
			1300	—	—	ns	$2.5V \le Vcc \le 5.5V$			
3	TLOW	Clock Low Time	4700	—	—	ns	1.7V ≤ Vcc < 2.5V ( <b>24AA01</b> )			
			500	—	_	ns	1.7V ≤ VCC ≤ 5.5V ( <b>24FC01</b> )			
				—	300	ns	2.5V ≤ Vcc ≤ 5.5V ( <b>Note 1</b> )			
4	Tr	SDA and SCL Rise Time	—	_	1000	ns	1.7V ≤ Vcc < 2.5V ( <b>24AA01</b> ) (Note 1)			
			_	—	1000	ns	1.7V ≤ Vcc ≤ 5.5V ( <b>24FC01</b> ) (Note 1)			
5	TF	SDA and SCL Fall Time	_	—	300	ns	Note 1			
			600	—	—	ns	2.5V ≤ Vcc ≤ 5.5V			
6	THD:STA	Start Condition Hold Time	4000	_	_	ns	1.7V ≤ Vcc < 2.5V ( <b>24AA01</b> )			
			250	—	—	ns	1.7V ≤ Vcc ≤ 5.5V ( <b>24FC01</b> )			
			600	—	_	ns	2.5V ≤ Vcc ≤ 5.5V			
7	TSU:STA	Start Condition Setup Time	4700	—	-	ns	1.7V ≤ Vcc < 2.5V ( <b>24AA01</b> )			
			250	_	_	ns	1.7V ≤ Vcc ≤ 5.5V ( <b>24FC01</b> )			
8	THD:DAT	Data Input Hold Time	0	_	-	ns	Note 2			
			100	—	—	ns	$2.5V \le Vcc \le 5.5V$			
9	TSU:DAT	Data Input Setup Time	250	—	_	ns	1.7V ≤ Vcc < 2.5V ( <b>24AA01</b> )			
			50	—	—	ns	1.7V ≤ Vcc ≤ 5.5V ( <b>24FC01</b> )			
			600	—	—	ns	$2.5V \le Vcc \le 5.5V$			
10	Tsu:sto	Stop Condition Setup Time	4000	—	_	ns	1.7V ≤ Vcc < 2.5V ( <b>24AA01</b> )			
			250		_	ns	1.7V ≤ VCC ≤ 5.5V ( <b>24FC01</b> )			
11	TSU:WP	WP Setup Time	0	_	_	ns	1.7V ≤ Vcc ≤ 5.5V ( <b>24FC01</b> )			
12	THD:WP	WP Hold Time	1000	—	_	ns	1.7V ≤ Vcc ≤ 5.5V ( <b>24FC01</b> )			
				—	900	ns	2.5V ≤ VCC ≤ 5.5V ( <b>Note 2</b> )			
13	ΤΑΑ	Output Valid from Clock		_	3500	ns	1.7V ≤ Vcc < 2.5V ( <b>24AA01</b> ) (Note 2)			
			_	_	450	ns	1.7V ≤ Vcc ≤ 5.5V ( <b>24FC01</b> ) (Note 2)			

Note 1: Characterized but not 100% tested.

**2:** As a transmitter, the device must provide an internal minimum delay time to bridge the undefined region (minimum 300 ns) of the falling edge of SCL to avoid unintended generation of Start or Stop conditions.

**3:** CB = total capacitance of one bus line in pF.

4: This parameter is not tested but ensured by characterization.


AC CHARACTERISTICS (Continued)			Industrial (I): TA = -40°C to +85°C, Vcc = +1.7V to +5.5V Extended (E): TA = -40°C to +125°C, Vcc = +2.5V to +5.5V (24LC01B) Extended (E): TA = -40°C to +125°C, Vcc = +1.7V to +5.5V (24FC01)						
Param. No.	Symbol	Characteristic	Min.	Тур.	Max.	Units	Conditions		
		Bus Free Time: The time	1300			ns	2.5V ≤ Vcc ≤ 5.5V		
14	TBUF	the bus must be free before a new transmission can start	4700			ns	1.7V ≤ Vcc < 2.5V ( <b>24AA01</b> )		
			500	—	—	ns	1.7V ≤ Vcc ≤ 5.5V ( <b>24FC01</b> )		
15	Tof	Output Fall Time from Viн Minimum to Vi∟ Maximum	20+0.1Св	_	250	ns	2.5V ≤ Vcc ≤ 5.5V ( <b>24LC01B</b> ) (Note 1 and Note 3)		
15	TOF		_	_	250	ns	1.7V ≤ Vcc < 2.5V ( <b>24AA01</b> ) (Note 4)		
16	TSP	Input Filter Spike Suppression (SDA and SCL pins)	_	_	50	ns	Note 1		
17	Twc	Write Cycle Time (byte or page)	—	_	5	ms			
18		Endurance	1,000,000	_	_	cycles	+25°C, 5.5V, Page Mode (Note 4)		

#### TABLE 1-2: AC CHARACTERISTICS (CONTINUED)

Note 1: Characterized but not 100% tested.

**2:** As a transmitter, the device must provide an internal minimum delay time to bridge the undefined region (minimum 300 ns) of the falling edge of SCL to avoid unintended generation of Start or Stop conditions.

- 3: CB = total capacitance of one bus line in pF.
- 4: This parameter is not tested but ensured by characterization.

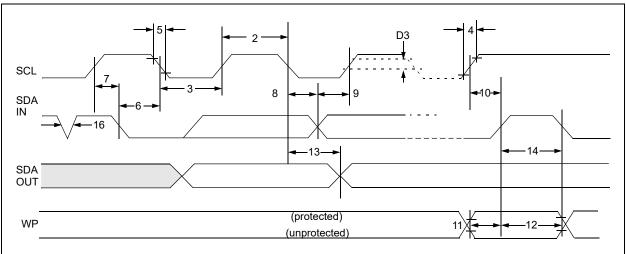

#### FIGURE 1-1: BUS TIMING DATA

# 2.0 PIN DESCRIPTIONS

The descriptions of the pins are listed in Table 2-1.

Name	DFN	MSOP	PDIP	SC-70	SOIC	SOT-23	TDFN <sup>(1)</sup>	TSSOP	UDFN <sup>(1)</sup>	Description			
A0	1	1	1	_	1	—	1	1	1	Not Connected			
A1	2	2	2	—	2	—	2	2	2	Not Connected			
A2	3	3	3	_	3	_	3	3	3	Not Connected			
Vss	4	4	4	2	4	2	4	4	4	Ground			
SDA	5	5	5	3	5	3	5	5	5	Serial Address/Data I/O			
SCL	6	6	6	1	6	1	6	6	6	Serial Clock			
WP	7	7	7	5	7	5	7	7	7	Write-Protect Input			
Vcc	8	8	8	4	8	4	8	8	8	Power Supply			

#### TABLE 2-1: PIN FUNCTION TABLE

Note 1: The exposed pad on the TDFN/UDFN package can be connected to Vss or left floating.

#### 2.1 A0, A1, A2

The A0, A1 and A2 pins are not used by the 24XX01. They may be left floating or tied to either Vss or Vcc.

# 2.2 Serial Address/Data Input/Output (SDA)

The SDA input is a bidirectional pin used to transfer addresses and data into and out of the device. Since it is an open-drain terminal, the SDA bus requires a pull-up resistor to Vcc (typical 10 k $\Omega$  for 100 kHz, 2 k $\Omega$  for 400 kHz and 1 MHz).

For normal data transfer, SDA is allowed to change only during SCL low. Changes during SCL high are reserved for indicating Start and Stop conditions.

# 2.3 Serial Clock (SCL)

The SCL input is used to synchronize the data transfer to and from the device.

# 2.4 Write-Protect (WP)

This pin must be connected to either Vss or Vcc.

If tied to Vss, normal memory operation is enabled (read/write the entire memory 00-7F).

If tied to Vcc, write operations are inhibited. The entire memory will be write-protected. Read operations are not affected.

# 3.0 FUNCTIONAL DESCRIPTION

The 24XX01 supports a bidirectional, two-wire bus and data transmission protocol. A device that sends data onto the bus is defined as transmitter, while defining a device receiving data as a receiver. The bus has to be controlled by a host device which generates the Serial Clock (SCL), controls the bus access and generates the Start and Stop conditions, while the 24XX01 works as client. Both host and client can operate as transmitter or receiver, but the host device determines which mode is activated.

# 4.0 BUS CHARACTERISTICS

The following **bus protocol** has been defined:

- Data transfer may be initiated only when the bus is not busy.
- During data transfer, the data line must remain stable whenever the clock line is high. Changes in the data line while the clock line is high will be interpreted as a Start or Stop condition.

Accordingly, the following bus conditions have been defined (Figure 4-1).

### 4.1 Bus Not Busy (A)

Both data and clock lines remain high.

#### 4.2 Start Data Transfer (B)

A high-to-low transition of the SDA line while the clock (SCL) is high determines a Start condition. All commands must be preceded by a Start condition.

#### 4.3 Stop Data Transfer (C)

A low-to-high transition of the SDA line while the clock (SCL) is high determines a Stop condition. All operations must be ended with a Stop condition.

### 4.4 Data Valid (D)

The state of the data line represents valid data when, after a Start condition, the data line is stable for the duration of the high period of the clock signal.

The data on the line must be changed during the low period of the clock signal. There is one clock pulse per bit of data.


Each data transfer is initiated with a Start condition and terminated with a Stop condition. The number of data bytes transferred between the Start and Stop conditions is determined by the host device and is, theoretically, unlimited (although only the last eight will be stored when doing a write operation). When an overwrite does occur, it will replace data based on the First-In First-Out (FIFO) principle.

#### 4.5 Acknowledge

Each receiving device, when addressed, is obliged to generate an Acknowledge after the reception of each byte. The host device must generate an extra clock pulse which is associated with this Acknowledge bit.

Note:	The 24XX01	does	not	gene	rate	any
	Acknowledge	bits	if	an	inte	ernal
	programming of	cycle is	in pr	ogress	s.	

The device that acknowledges has to pull down the SDA line during the Acknowledge clock pulse in such a way that the SDA line is stable-low during the high period of the Acknowledge-related clock pulse. Moreover, setup and hold times must be taken into account. During reads, a host must signal an end of data to the client by not generating an Acknowledge bit on the last byte that has been clocked out of the client. In this case, the client (24XX01) will leave the data line high to enable the host to generate the Stop condition.

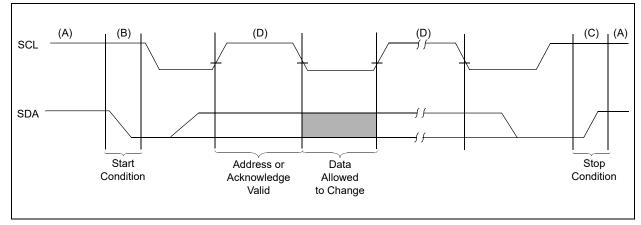

#### FIGURE 4-1: DATA TRANSFER SEQUENCE ON THE SERIAL BUS

# 5.0 DEVICE ADDRESSING


A control byte is the first byte received following the Start condition from the host device. The control byte consists of a four-bit control code. For the 24XX01, this is set as '1010' binary for read and write operations. The next three bits of the control byte are "don't cares" for the 24XX01. The combination of the 4-bit control code and the next three bits are called the client address.

The last bit of the control byte is the Read/Write (R/W) bit and it defines the operation to be performed. When set to '1', a read operation is selected. When set to '0', a write operation is selected. Following the Start condition, the 24XX01 monitors the SDA bus, checking the device type identifier being transmitted. Upon receiving a valid client address and the R/W bit, the client device outputs an Acknowledge signal on the SDA line. Depending on the state of the R/W bit, the 24XX01 will select a read or write operation.


The next byte received defines the address of the first data byte within the selected block (Figure 5-2). Because only A6...A0 are used, the upper address bit is a "don't care".

Operation	Control Code	Block Select	R/W
Read	1010	Block Address	1
Write	1010	Block Address	0

# FIGURE 5-1: CONTROL BYTE ALLOCATION



# FIGURE 5-2: ADDRESS SEQUENCE BIT ASSIGNMENTS

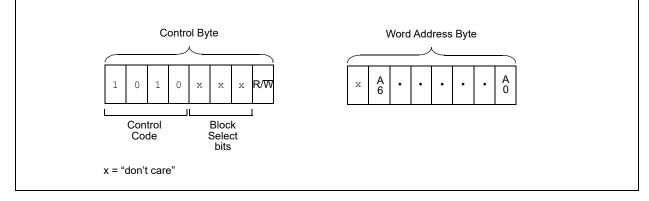

## 6.0 WRITE OPERATION

#### 6.1 Byte Write

Following the Start condition from the host, the device code (4 bits), the block address (3 bits, "don't cares") and the R/W bit, which is a logic-low, is placed onto the bus by the host transmitter. This indicates to the addressed client receiver that a byte with a word address will follow after it has generated an Acknowledge bit during the ninth clock cycle. Therefore, the next byte transmitted by the host is the word address and will be written into the Address Pointer of the 24XX01. After receiving another Acknowledge signal from the 24XX01, the host device will transmit the data word to be written into the memory addressed location. The 24XX01 acknowledges again and the host generates a Stop condition. This initiates the internal write cycle and during this time, the 24XX01 will not generate Acknowledge signals (Figure 6-1).


#### 6.2 Page Write

The write control byte, word address and first data byte are transmitted to the 24XX01 in the same way as in a byte write. However, instead of generating a Stop condition, the host transmits up to 8 data bytes to the 24XX01, which are temporarily stored in the on-chip page buffer and will be written into the memory once the host has transmitted a Stop condition. Upon receipt of each word, the three lower-order Address Pointer bits, which form the byte counter, are internally incremented by one. The higher-order five bits of the word address remain constant. If the host should transmit more than eight words prior to generating the Stop condition, the Address Pointer will roll over and the previously received data will be overwritten. As with the byte write operation, once the Stop condition is received, an internal write cycle will begin (Figure 6-2).

Note: Page write operations are limited to writing bytes within a single physical page regardless of the number of bytes actually being written. Physical page boundaries start at addresses that are integer multiples of the page buffer size (or 'page size') and end at addresses that are integer multiples of page size - 1. If a page write command attempts to write across a physical page boundary, the result is that the data wrap around to the beginning of the current page (overwriting data previously stored there), instead of being written to the next page, as might be expected. It is therefore necessary for the application software to prevent page write operations that would attempt to cross a page boundary.


#### 6.3 Write Protection

The WP pin allows the user to write-protect the entire array (00-7F) when the pin is tied to Vcc. If tied to Vss, the write protection is disabled.

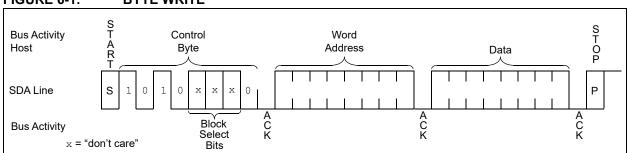


#### FIGURE 6-1: BYTE WRITE

# 24AA01/24LC01B/24FC01

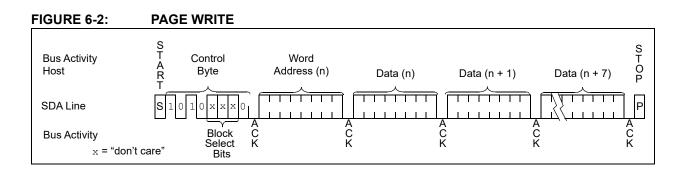

# 7.0 ACKNOWLEDGE POLLING

Since the device will not acknowledge during a write cycle, this can be used to determine when the cycle is complete (this feature can be used to maximize bus throughput). Once the Stop condition for a write command has been issued from the host, the device initiates the internally-timed write cycle. ACK polling can then be initiated immediately. This involves the host sending a Start condition followed by the control byte for a write cycle, no ACK will be returned. If the cycle is complete, the device will return the ACK and the host can then proceed with the next read or write operation.

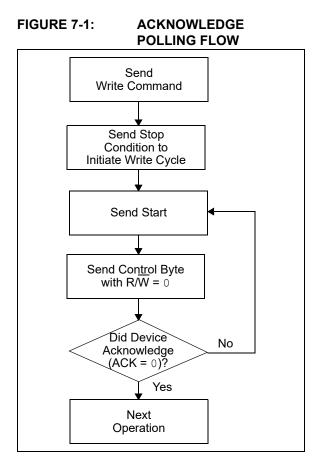

# 8.0 READ OPERATION

Read operations are initiated in the same way as write operations, with the exception that the R/W bit of the client address is set to '1'. There are three basic types of read operations: current address read, random read and sequential read.

#### 8.1 Current Address Read

The 24XX01 contains an Address Pointer that maintains the address of the last word accessed, internally incremented by one. Therefore, if the previous access (either a read or write operation) was to address n, the next current address read operation would access data from address n + 1. Upon receipt of the client address with R/W bit set to '1', the 24XX01 issues an Acknowledge and transmits the 8-bit data word. The host will not acknowledge the transfer, but does generate a Stop condition and the 24XX01 discontinues transmission (Figure 8-1).

### 8.2 Random Read

Random read operations allow the host to access any memory location in a random manner. To perform this type of read operation, the word address must first be set. This is accomplished by sending the word address to the 24XX01 as part of a write operation. Once the word address is sent, the host generates a Start condition following the Acknowledge. This terminates the write operation, but not before the internal Address Pointer is set. The host then issues the control byte again, but with the R/W bit set to a '1'. The 24XX01 will then issue an Acknowledge and transmits the 8-bit data word. The host will not acknowledge the transfer, but does generate a Stop condition and the 24XX01 discontinues transmission (Figure 8-2).

#### FIGURE 8-1: CURRENT ADDRESS READ

#### S T A R **Bus Activity** Control STOP Host Byte Data (n) T SDA Line Ρ 0 S 0 х 1 1 Х х 1 Ν A C K **Bus Activity** o Block Select A C K x = "don't care" Bits

#### 8.3 Sequential Read


Sequential reads are initiated in the same way as a random read, except that once the 24XX01 transmits the first data byte, the host issues an Acknowledge (as opposed to a Stop condition in a random read). This directs the 24XX01 to transmit the next sequentially addressed 8-bit word (Figure 8-3).

To provide sequential reads the 24XX01 contains an internal Address Pointer which is incremented by one at the completion of each operation. This Address Pointer allows the entire memory contents to be serially read during one operation.


#### 8.4 Noise Protection

The SCL and SDA inputs have Schmitt Trigger and filter circuits which suppress noise spikes to assure proper device operation even on a noisy bus.

# 24AA01/24LC01B/24FC01

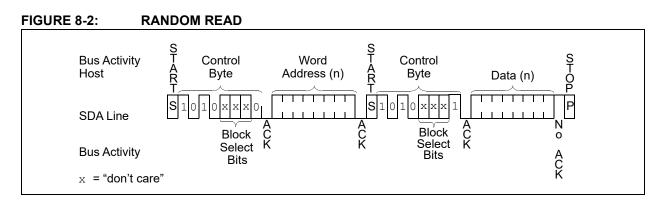




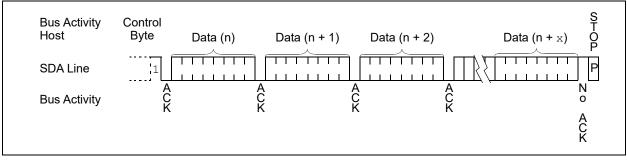


#### 9.0 **PACKAGING INFORMATION**


#### 9.1 **Package Marking Information\***

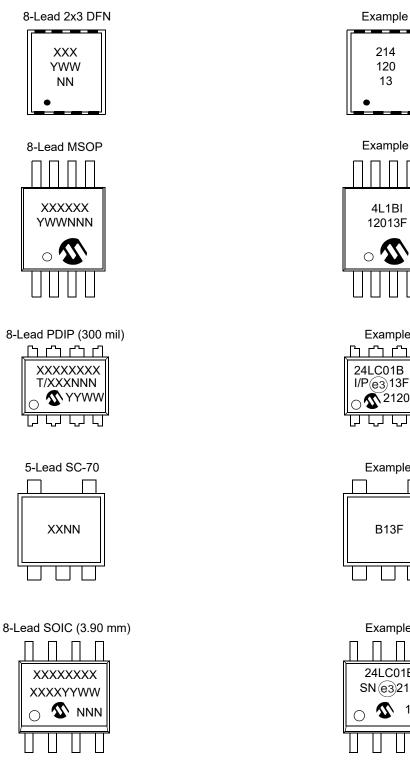













DS20001711N-page 14





#### 5-Lead SOT-23 (2-Line Marking)

		1
>	XXXYY	
٥ ٧	VWNNN	
		Γ









8-Lead 2x3 UDFN (Q4B)

Γ	
	XXX
	YWW
	NN
	•
L	

8-Lead 2x3 UDFN (Q6B)

	1
XXX	
YWW	
NN	
•	
	YWW











Example







lber		1 <sup>st</sup> Line Marking Codes											
Numbe	10000		UDFN	UDFN	SO	SOT-23		DFN		TDFN		SC-70	
Part	TSSOP MSOF	MSOP	(Q4B)		I-Temp	E-Temp	I-Temp	E-Temp	I-Temp	E-Temp	I-Temp	E-Temp	
24AA01	4A01	4A01T <sup>(1)</sup>	—	—	B1NN <sup>(2,3)</sup>	—	211	_	A11	—	B2NN <sup>(2)</sup>	_	
24LC01B	4L1B	4L1BT <sup>(1)</sup>	_	_	M1NN <sup>(2,3)</sup>	N1NN <sup>(2,3)</sup>	214	215	A14	A15	B1NN <sup>(2)</sup>	B3NN <sup>(2)</sup>	
24FC01	AADP	24FC01	ADM	AAJ	AAEUYY <sup>(4)</sup>	AAEUYY <sup>(4)</sup>	_	_	_	—	_	_	

**Note 1:** T = Temperature grade (I, E)


2: NN = Alphanumeric traceability code

3: These parts use the 1-line SOT-23 marking format

4: These parts use the 2-line SOT-23 marking format

Legend:	XXX T YY YY WW NNN (e3)	Part number or part number code Temperature (I, E) Year code (last digit of calendar year) Year code (last 2 digits of calendar year) Week code (week of January 1 is week '01') Alphanumeric traceability code (2 characters for small packages) JEDEC <sup>®</sup> designator for Matte Tin (Sn)				
	rd OTP i aceability	marking consists of Microchip part number, year code, week code, code.				
Note:	<b>Note:</b> For very small packages with no room for the JEDEC <sup>®</sup> designator $(e3)$ , the marking will only appear on the outer carton or reel label.					
Note:						


#### 8-Lead Plastic Dual Flat, No Lead Package (MC) - 2x3x1 mm Body [DFN]

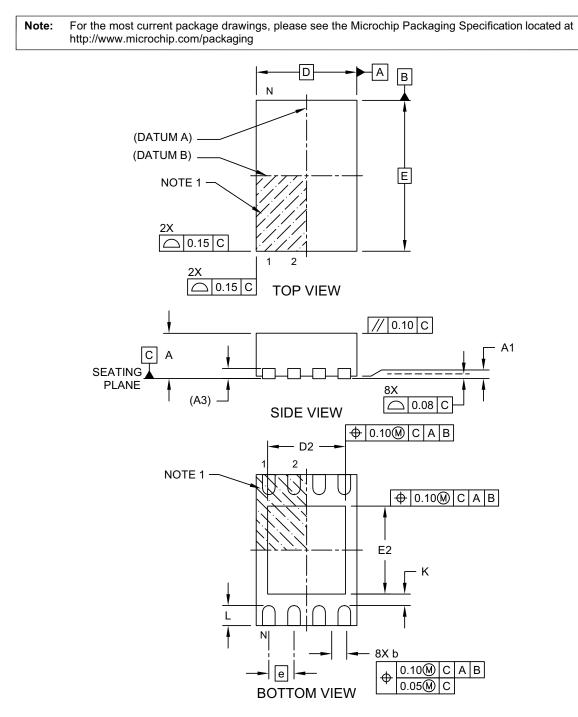

Microchip Technology Drawing C04-123 Rev E Sheet 1 of 2

### 8-Lead Plastic Dual Flat, No Lead Package (MC) - 2x3x1 mm Body [DFN]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

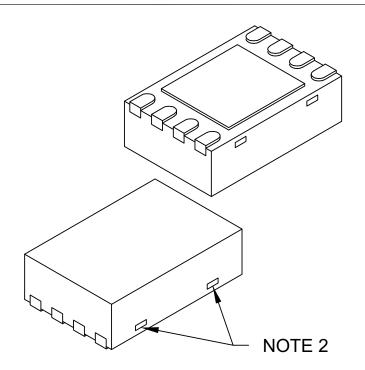

	Units			S
Dimension	Limits	MIN	NOM	MAX
Number of Terminals	N		8	
Pitch	е		0.50 BSC	
Overall Height	Α	0.80	0.90	1.00
Standoff	A1	0.00	0.02	0.05
Terminal Thickness		0.20 REF		
Overall Length	D	2.00 BSC		
Exposed Pad Length	D2	1.30	-	1.55
Overall Width	E	3.00 BSC		
Exposed Pad Width	E2	1.50	-	1.75
Terminal Width	b	0.20	0.25	0.30
Terminal Length	Ĺ	0.30	0.40	0.50
Terminal-to-Exposed-Pad	K	0.20	-	-

Notes:

1. Pin 1 visual index feature may vary, but must be located within the hatched area.

- 2. Package may have one or more exposed tie bars at ends.
- 3. Package is saw singulated


4. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances. REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing C04-123 Rev E Sheet 2 of 2

### 8-Lead Plastic Dual Flat, No Lead Package (MC) - 2x3x1 mm Body [DFN]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

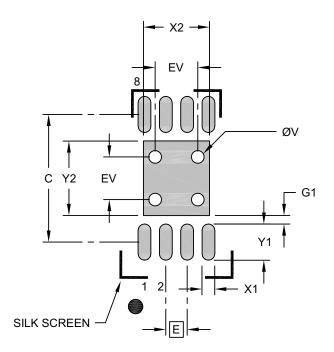

#### RECOMMENDED LAND PATTERN

Units		Ν	<b>IILLIMETER</b>	S
Dimension Limits		MIN	NOM	MAX
Contact Pitch	Е		0.50 BSC	
Optional Center Pad Width	X2			1.55
Optional Center Pad Length	Y2			1.75
Contact Pad Spacing	С		3.00	
Contact Pad Width (X8)	X1			0.30
Contact Pad Length (X8)	Y1			0.85
Contact Pad to Center Pad (X8)	G1	0.20		
Thermal Via Diameter	V		0.30	
Thermal Via Pitch	EV		1.00	


#### Notes:

- 1. Dimensioning and tolerancing per ASME Y14.5M
  - BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- 2. For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-2123 Rev E

#### 8-Lead Plastic Micro Small Outline Package (MS) [MSOP]


**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

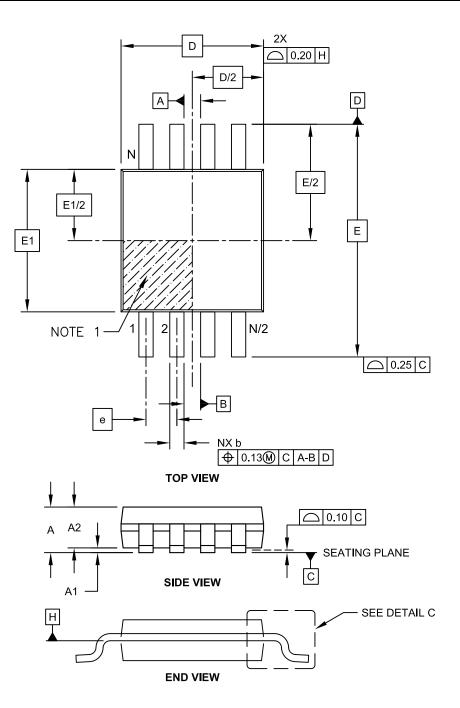

Microchip Technology Drawing C04-111C Sheet 1 of 2

#### 8-Lead Plastic Micro Small Outline Package (MS) [MSOP]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

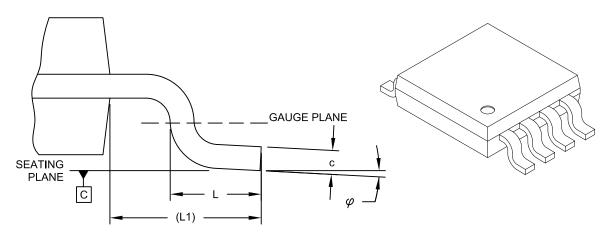

DETAIL C

	MILLIMETERS			
Dimensior	n Limits	MIN	NOM	MAX
Number of Pins	Ν		8	
Pitch	e		0.65 BSC	
Overall Height	A	-	-	1.10
Molded Package Thickness	A2	0.75	0.85	0.95
Standoff	A1	0.00	-	0.15
Overall Width	E	4.90 BSC		
Molded Package Width	E1	3.00 BSC		
Overall Length	D		3.00 BSC	
Foot Length	L	0.40	0.60	0.80
Footprint	L1	0.95 REF		
Foot Angle	φ	0°	-	8°
Lead Thickness	С	0.08	-	0.23
Lead Width	b	0.22	-	0.40

Notes:

1. Pin 1 visual index feature may vary, but must be located within the hatched area.

2. Dimensions D and E1 do not include mold flash or protrusions. Mold flash or

protrusions shall not exceed 0.15mm per side.


3. Dimensioning and tolerancing per ASME Y14.5M. BSC: Basic Dimension. Theoretically exact value shown without tolerances.

REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing C04-111C Sheet 2 of 2

#### 8-Lead Plastic Micro Small Outline Package (MS) [MSOP]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

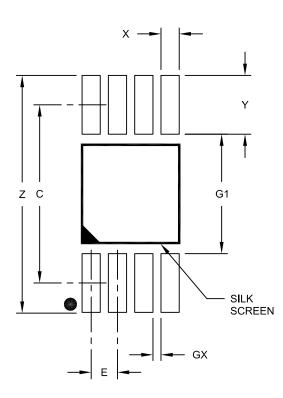

#### RECOMMENDED LAND PATTERN

	Units		MILLIMETERS		
Dimensio	Dimension Limits		NOM	MAX	
Contact Pitch	E		0.65 BSC		
Contact Pad Spacing	С		4.40		
Overall Width	Z			5.85	
Contact Pad Width (X8)	X1			0.45	
Contact Pad Length (X8)	Y1			1.45	
Distance Between Pads	G1	2.95			
Distance Between Pads	GX	0.20			

#### Notes:


1. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.


Microchip Technology Drawing No. C04-2111A


# 8-Lead Plastic Dual In-Line (P) - 300 mil Body [PDIP]


**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging







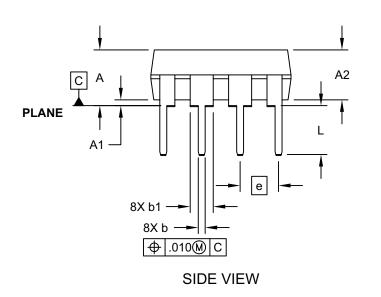





**END VIEW** 

Microchip Technology Drawing No. C04-018-P Rev E Sheet 1 of 2

# 8-Lead Plastic Dual In-Line (P) - 300 mil Body [PDIP]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging





Units		INCHES			
Dimension	Limits	MIN	NOM	MAX	
Number of Pins	Number of Pins N		8		
Pitch	е		.100 BSC		
Top to Seating Plane	Α	-	-	.210	
Molded Package Thickness	A2	.115	.130	.195	
Base to Seating Plane	A1	.015	-	-	
Shoulder to Shoulder Width	E	.290	.310	.325	
Molded Package Width	E1	.240	.250	.280	
Overall Length	D	.348	.365	.400	
Tip to Seating Plane	L	.115	.130	.150	
Lead Thickness	С	.008	.010	.015	
Upper Lead Width	b1	.040	.060	.070	
Lower Lead Width	b	.014	.018	.022	
Overall Row Spacing §	eВ	-	-	.430	


Notes:

- 1. Pin 1 visual index feature may vary, but must be located within the hatched area.
- 2. § Significant Characteristic
- 3. Dimensions D and E1 do not include mold flash or protrusions. Mold flash or protrusions shall not exceed .010" per side.
- Dimensioning and tolerancing per ASME Y14.5M BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- 5. Lead design above seating plane may vary, based on assembly vendor.

Microchip Technology Drawing No. C04-018-P Rev E Sheet 2 of 2

# 5-Lead Plastic Small Outline Transistor (LT) [SC70]


**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

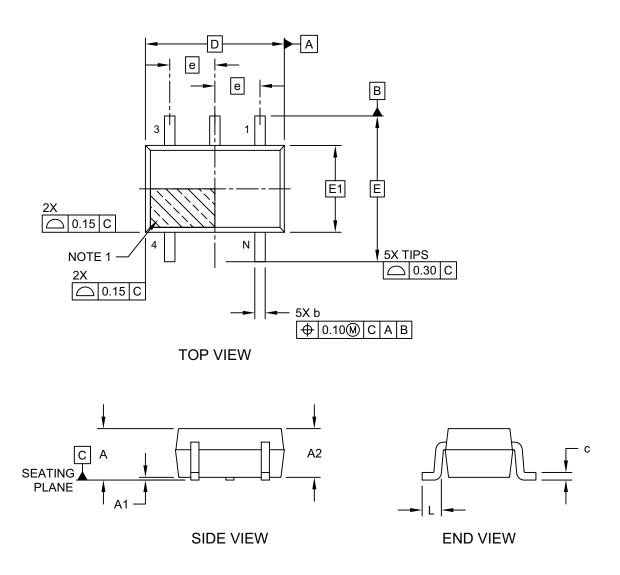

Microchip Technology Drawing C04-061-LT Rev E Sheet 1 of 2

# 5-Lead Plastic Small Outline Transistor (LT) [SC70]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging



	MILLIMETERS				
Dimension Limits		MIN	NOM	MAX	
Number of Pins	Ν		5		
Pitch	е		0.65 BSC		
Overall Height	А	0.80 - 1.10			
Standoff	A1	0.00	-	0.10	
Molded Package Thickness	A2	0.80	-	1.00	
Overall Length	D		2.00 BSC		
Overall Width	E		2.10 BSC		
Molded Package Width	E1		1.25 BSC		
Terminal Width	b	0.15	-	0.40	
Terminal Length	L	0.10	0.20	0.46	
Lead Thickness	С	0.08	-	0.26	


#### Notes:

- 1. Pin 1 visual index feature may vary, but must be located within the hatched area.
- 2. Dimensions D and E1 do not include mold flash or protrusions. Mold flash or
- protrusions shall not exceed 0.15mm per side.
- Dimensioning and tolerancing per ASME Y14.5M
   BSC: Basic Dimension. Theoretically exact value shown without tolerances.
   REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing C04-061-LT Rev E Sheet 2 of 2

# 5-Lead Plastic Small Outline Transistor (LT) [SC70]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

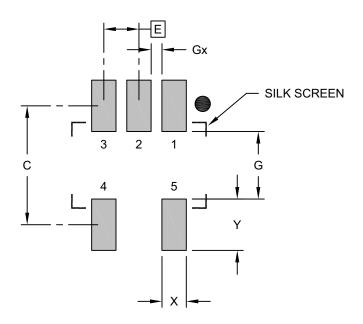

#### RECOMMENDED LAND PATTERN

	Units		MILLIMETERS		
Dimension	Dimension Limits		NOM	MAX	
Contact Pitch	E		0.65 BSC		
Contact Pad Spacing	С		2.20		
Contact Pad Width	Х			0.45	
Contact Pad Length	Y			0.95	
Distance Between Pads	G	1.25			
Distance Between Pads	Gx	0.20			

#### Notes:


1. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing No. C04-2061-LT Rev E

# 8-Lead Plastic Small Outline (SN) - Narrow, 3.90 mm (.150 In.) Body [SOIC]


**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

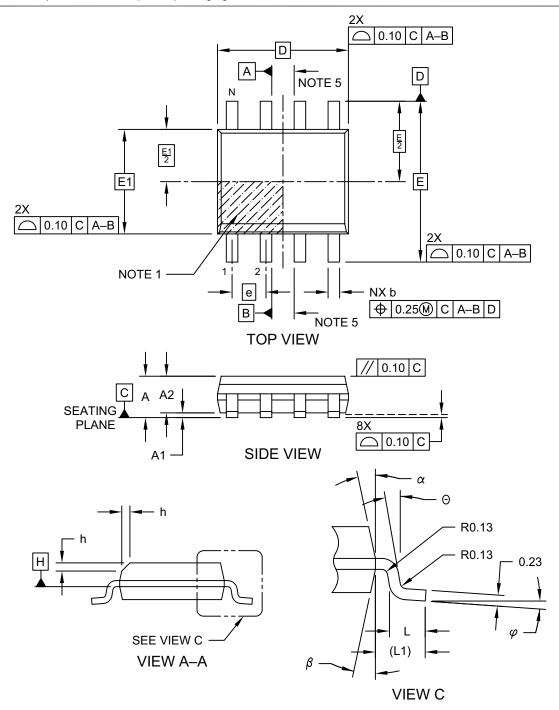

Microchip Technology Drawing No. C04-057-SN Rev F Sheet 1 of 2

#### 8-Lead Plastic Small Outline (SN) - Narrow, 3.90 mm (.150 In.) Body [SOIC]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

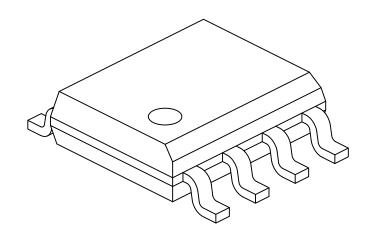

	N	1ILLIMETER	S		
Dimension	Limits	MIN	NOM	MAX	
Number of Pins	Ν		8		
Pitch	е		1.27 BSC		
Overall Height	Α	-	-	1.75	
Molded Package Thickness	A2	1.25	-	-	
Standoff §	A1	0.10	-	0.25	
Overall Width	E	6.00 BSC			
Molded Package Width	E1	3.90 BSC			
Overall Length	D	4.90 BSC			
Chamfer (Optional)	h	0.25	-	0.50	
Foot Length	L	0.40	-	1.27	
Footprint	L1	1.04 REF			
Foot Angle	φ	0°	-	8°	
Lead Thickness	С	0.17	-	0.25	
Lead Width	b	0.31	-	0.51	
Mold Draft Angle Top	α	5°	-	15°	
Mold Draft Angle Bottom	β	5°	-	15°	

Notes:

1. Pin 1 visual index feature may vary, but must be located within the hatched area.

2. § Significant Characteristic

3. Dimensions D and E1 do not include mold flash or protrusions. Mold flash or protrusions shall not exceed 0.15mm per side.

4. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.


REF: Reference Dimension, usually without tolerance, for information purposes only.

5. Datums A & B to be determined at Datum H.

Microchip Technology Drawing No. C04-057-SN Rev F Sheet 2 of 2

# 8-Lead Plastic Small Outline (SN) - Narrow, 3.90 mm (.150 In.) Body [SOIC]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

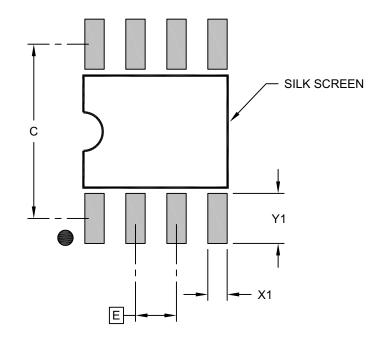

# RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimensior	Dimension Limits		NOM	MAX
Contact Pitch E		1.27 BSC		
Contact Pad Spacing	С		5.40	
Contact Pad Width (X8)	X1			0.60
Contact Pad Length (X8)	Y1			1.55


Notes:


1. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing C04-2057-SN Rev F

# 5-Lead Plastic Small Outline Transistor (OT) [SOT23]

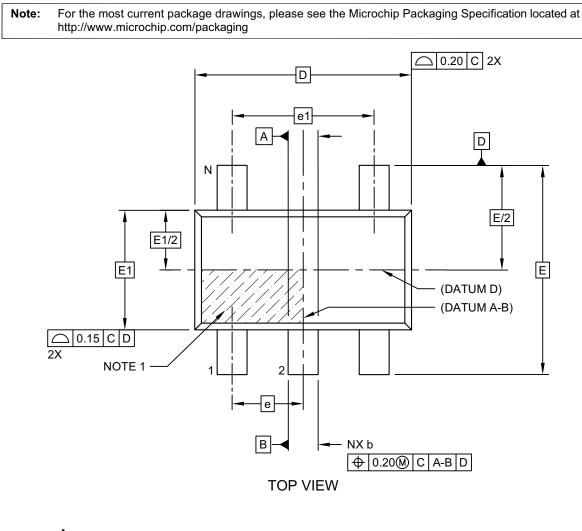


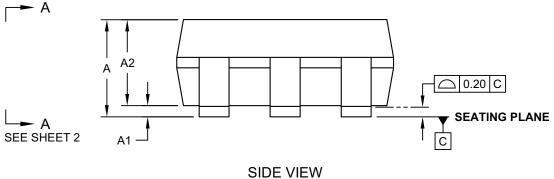

Microchip Technology Drawing C04-091-OT Rev G Sheet 1 of 2

# 5-Lead Plastic Small Outline Transistor (OT) [SOT23]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

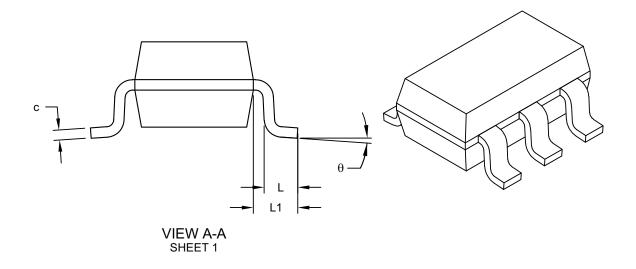

	N	ILLIMETER	S	
Dimension	Limits	MIN	NOM	MAX
Number of Pins	Ν		5	
Pitch	е		0.95 BSC	
Outside lead pitch	e1		1.90 BSC	
Overall Height	Α	0.90	-	1.45
Molded Package Thickness	A2	0.89	-	1.30
Standoff	A1	-	-	0.15
Overall Width	E		2.80 BSC	
Molded Package Width	E1		1.60 BSC	
Overall Length	D		2.90 BSC	
Foot Length	L	0.30	-	0.60
Footprint	L1	0.60 REF		
Foot Angle	¢	0°	-	10°
Lead Thickness	С	0.08	-	0.26
Lead Width	b	0.20	-	0.51

Notes:

1. Dimensions D and E1 do not include mold flash or protrusions. Mold flash or


protrusions shall not exceed 0.25mm per side.

 Dimensioning and tolerancing per ASME Y14.5M BSC: Basic Dimension. Theoretically exact value shown without tolerances. REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing C04-091-OT Rev G Sheet 2 of 2

# 5-Lead Plastic Small Outline Transistor (OT) [SOT23]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

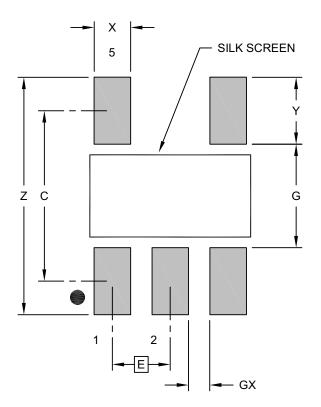

#### RECOMMENDED LAND PATTERN

	MILLIMETERS				
Dimension	Dimension Limits		NOM	MAX	
Contact Pitch	E		0.95 BSC		
Contact Pad Spacing	С		2.80		
Contact Pad Width (X5)	Х			0.60	
Contact Pad Length (X5)	Y			1.10	
Distance Between Pads	G	1.70			
Distance Between Pads	GX	0.35			
Overall Width	Z			3.90	

Notes:


1. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing No. C04-2091-OT Rev G

#### 8-Lead Plastic Dual Flat, No Lead Package (MNY) – 2x3x0.8 mm Body [TDFN] With 1.4x1.3 mm Exposed Pad (JEDEC Package type WDFN)


**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

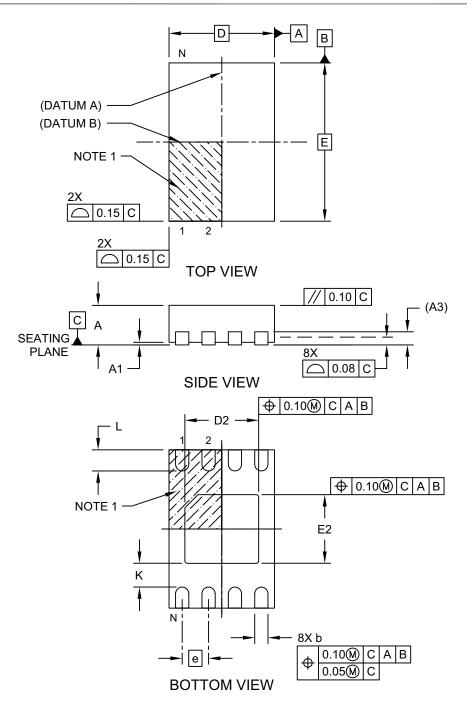

Microchip Technology Drawing No. C04-129-MNY Rev E Sheet 1 of 2

#### 8-Lead Plastic Dual Flat, No Lead Package (MNY) – 2x3x0.8 mm Body [TDFN] With 1.4x1.3 mm Exposed Pad (JEDEC Package type WDFN)

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

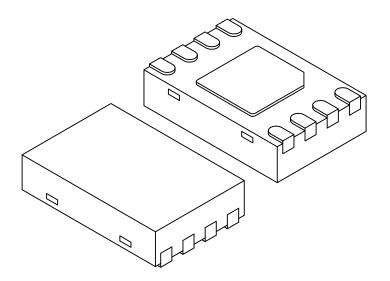

	Units	MILLIMETERS			
Dimension Limits		MIN	NOM	MAX	
Number of Pins	N	8			
Pitch	е	0.50 BSC			
Overall Height	A	0.70	0.75	0.80	
Standoff	A1	0.00	0.02	0.05	
Contact Thickness	A3	0.20 REF			
Overall Length	D	2.00 BSC			
Overall Width	E	3.00 BSC			
Exposed Pad Length	D2	1.35	1.40	1.45	
Exposed Pad Width	E2	1.25	1.30	1.35	
Contact Width	b	0.20	0.25	0.30	
Contact Length	L	0.25	0.30	0.45	
Contact-to-Exposed Pad	K	0.20	-	-	

#### Notes:


1. Pin 1 visual index feature may vary, but must be located within the hatched area.

- 2. Package may have one or more exposed tie bars at ends.
- 3. Package is saw singulated
- 4. Dimensioning and tolerancing per ASME Y14.5M
  - BSC: Basic Dimension. Theoretically exact value shown without tolerances. REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing No. C04-129-MNY Rev E Sheet 2 of 2

#### 8-Lead Plastic Dual Flat, No Lead Package (MNY) – 2x3x0.8 mm Body [TDFN] With 1.4x1.3 mm Exposed Pad (JEDEC Package type WDFN)

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging



#### **RECOMMENDED LAND PATTERN**


Units		MILLIMETERS			
Dimension Limits		MIN	NOM	MAX	
Contact Pitch	E	0.50 BSC			
Optional Center Pad Width	X2			1.60	
Optional Center Pad Length	Y2			1.50	
Contact Pad Spacing	С		2.90		
Contact Pad Width (X8)	X1			0.25	
Contact Pad Length (X8)	Y1			0.85	
Thermal Via Diameter	V		0.30		
Thermal Via Pitch	EV		1.00		

#### Notes:

- 1. Dimensioning and tolerancing per ASME Y14.5M
  - BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- 2. For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing No. C04-129-MNY Rev. B


# 8-Lead Plastic Thin Shrink Small Outline (ST) - 4.4 mm Body [TSSOP]

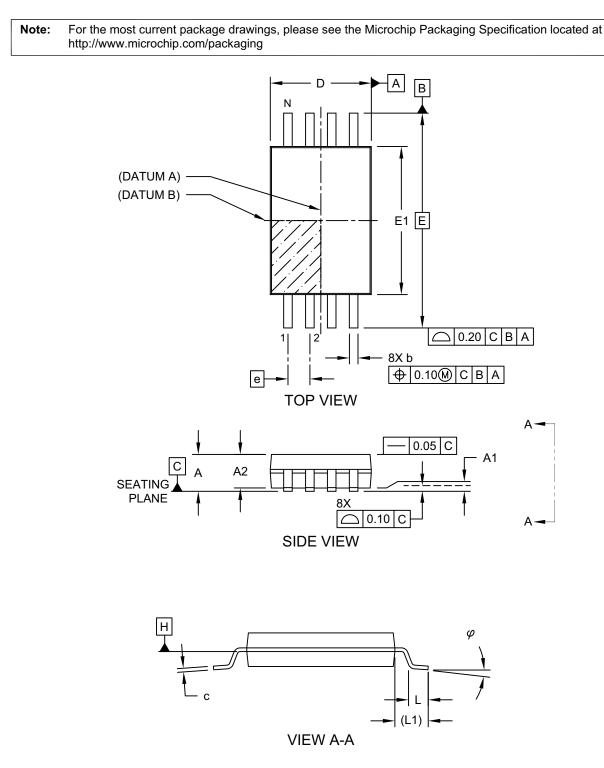

Microchip Technology Drawing C04-086 Rev C Sheet 1 of 2

# 8-Lead Plastic Thin Shrink Small Outline (ST) - 4.4 mm Body [TSSOP]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging



	MILLIMETERS					
Dimension Limits		MIN	NOM	MAX		
Number of Pins	Number of Pins N		8			
Pitch	е		0.65 BSC			
Overall Height	Α	1.20				
Molded Package Thickness	A2	0.80	1.00	1.05		
Standoff	A1	0.05	-	-		
Overall Width	E		6.40 BSC			
Molded Package Width	E1	4.30	4.40	4.50		
Overall Length	D	2.90	3.00	3.10		
Foot Length	L	0.45	0.60	0.75		
Footprint	nt L1					
Lead Thickness	С	0.09	-	0.25		
Foot Angle	φ	0°	4°	8°		
Lead Width	b	0.19	-	0.30		

Notes:


- 1. Pin 1 visual index feature may vary, but must be located within the hatched area.
- 2. Dimensions D and E1 do not include mold flash or protrusions. Mold flash or protrusions shall not exceed 0.20mm per side.
- 3. Dimensioning and tolerancing per ASME Y14.5M BSC: Basic Dimension. Theoretically exact value shown without tolerances.

REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing C04-086 Rev C Sheet 2 of 2

### 8-Lead Plastic Thin Shrink Small Outline (ST) - 4.4 mm Body [TSSOP]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

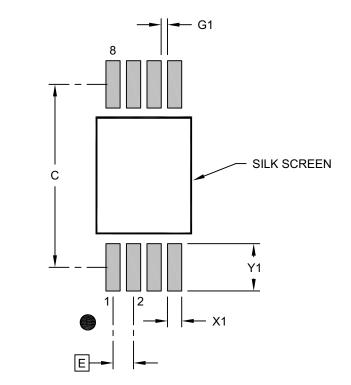

#### RECOMMENDED LAND PATTERN

	MILLIMETERS				
Dimension	Dimension Limits			MAX	
Contact Pitch	E		0.65 BSC		
Contact Pad Spacing	С		5.80		
Contact Pad Width (X8) X1				0.45	
Contact Pad Length (X8) Y1				1.50	
Contact Pad to Center Pad (X6) G1		0.20			

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M


BSC: Basic Dimension. Theoretically exact value shown without tolerances.

2. For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-2086 Rev B

### 8-Lead Ultra Thin Plastic Dual Flat, No Lead Package (Q4B) - 2x3 mm Body [UDFN] Atmel Legacy Global Package Code YNZ


**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

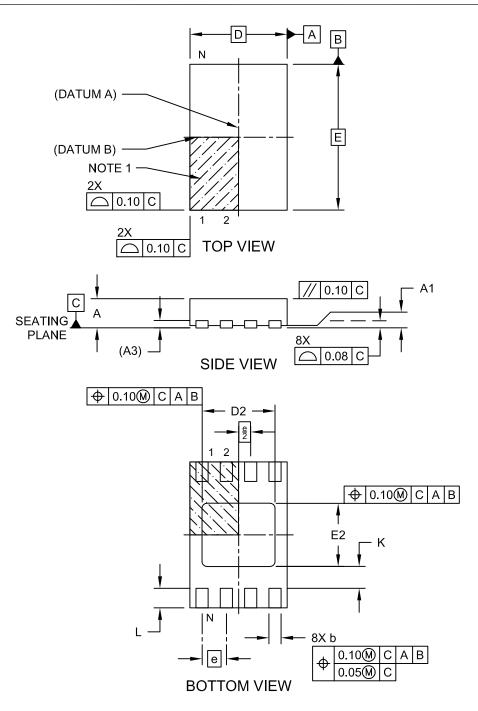

Microchip Technology Drawing C04-21355-Q4B Rev C Sheet 1 of 2

#### 8-Lead Ultra Thin Plastic Dual Flat, No Lead Package (Q4B) - 2x3 mm Body [UDFN] Atmel Legacy Global Package Code YNZ

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

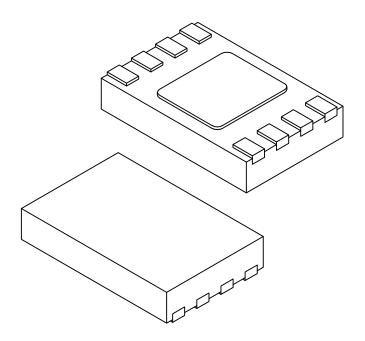

	MILLIMETERS				
Dimensior	n Limits	MIN	NOM	MAX	
Number of Terminals	N		8		
Pitch	е		0.50 BSC		
Overall Height	Α	0.50 0.55 0.60			
Standoff	A1	0.00 0.02 0.0			
Terminal Thickness	A3	0.152 REF			
Overall Length	D	2.00 BSC			
Exposed Pad Length	D2	1.40 1.50 1.60			
Overall Width	Е	3.00 BSC			
Exposed Pad Width	E2	1.20 1.30 1.40			
Terminal Width	b	0.18 0.25 0.3			
Terminal Length	L	0.25 0.35 0.4			
Terminal-to-Exposed-Pad	K	0.20	-	-	

Notes:

1. Pin 1 visual index feature may vary, but must be located within the hatched area.

2. Package is saw singulated


3. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances. REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing C04-21355-Q4B Rev C Sheet 2 of 2

#### 8-Lead Ultra Thin Plastic Dual Flat, No Lead Package (Q4B) - 2x3 mm Body [UDFN] Atmel Legacy Global Package Code YNZ

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

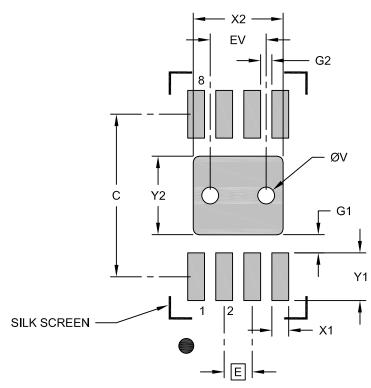

#### RECOMMENDED LAND PATTERN

	MILLIMETERS				
Dimensior	Dimension Limits			MAX	
Contact Pitch	Contact Pitch E		0.50 BSC		
Optional Center Pad Width	X2	1.6			
Optional Center Pad Length			1.40		
Contact Pad Spacing C			2.90		
Contact Pad Width (X8) X1				0.30	
Contact Pad Length (X8) Y1				0.85	
Contact Pad to Center Pad (X8)	G1	0.33			
Contact Pad to Contact Pad (X6)	G2	0.20			
Thermal Via Diameter V			0.30		
Thermal Via Pitch EV			1.00		

Notes:


BSC: Basic Dimension. Theoretically exact value shown without tolerances.


2. For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-23355-Q4B Rev C

<sup>1.</sup> Dimensioning and tolerancing per ASME Y14.5M

#### 8-Lead Ultra Thin Plastic Dual Flat. No Lead Package (Q6B) - 2x3x0.55 mm Body [UDFN] With 1.4x1.3 mm Exposed Pad and Stepped Wettable Flanks




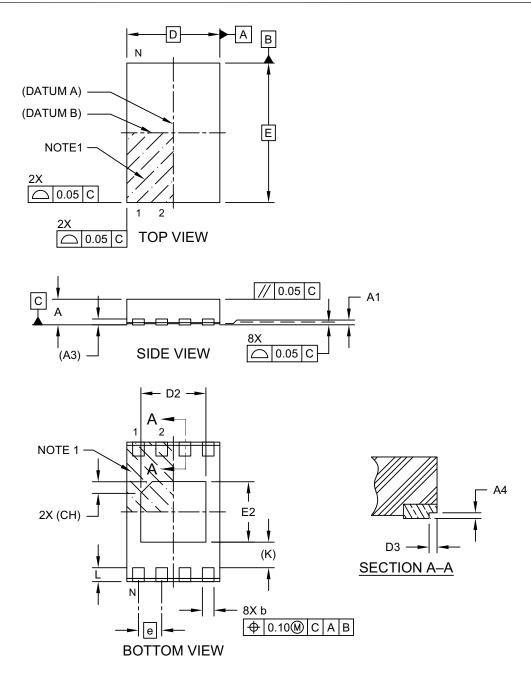

Microchip Technology Drawing C04-21509 Rev A Sheet 1 of 2

# 8-Lead Ultra Thin Plastic Dual Flat. No Lead Package (Q6B) - 2x3x0.55 mm Body [UDFN] With 1.4x1.3 mm Exposed Pad and Stepped Wettable Flanks

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging



	MILLIMETERS				
Dimension Limits		MIN	NOM	MAX	
Number of Terminals		8			
Pitch	е		0.50 BSC		
Overall Height	Α	0.45	0.50	0.55	
Standoff	A1	0.00	0.02	0.05	
Terminal Thickness	A3	0.127 REF			
Overall Length	D	2.00 BSC			
Exposed Pad Length	D2	1.35 1.40 1.45			
Overall Width	Е	3.00 BSC			
Exposed Pad Width	E2	1.25 1.30		1.35	
Exposed Pad Corner Chamfer	СН	0.25 REF			
Terminal Width	b	0.20 0.25 0.30			
Terminal Length	L	0.25	0.30	0.35	
Terminal-to-Exposed-Pad	K	0.55 REF			
Wettable Flank Step Cut Length	D3	0.03	0.07	0.11	
Wettable Flank Step Cut Height	A4	0.05	-	-	

Notes:

1. Pin 1 visual index feature may vary, but must be located within the hatched area.

2. Package is saw singulated

3. Dimensioning and tolerancing per ASME Y14.5M


BSC: Basic Dimension. Theoretically exact value shown without tolerances.

REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing C04-21509 Rev A Sheet 2 of 2

#### 8-Lead Ultra Thin Plastic Dual Flat. No Lead Package (Q6B) - 2x3x0.55 mm Body [UDFN] With 1.4x1.3 mm Exposed Pad and Stepped Wettable Flanks

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

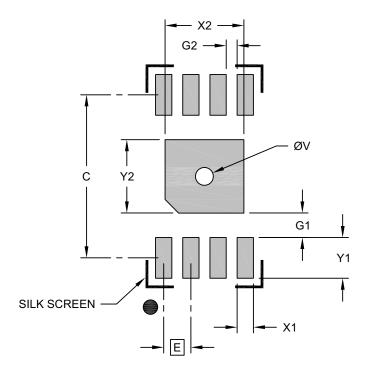

#### **RECOMMENDED LAND PATTERN**

	MILLIMETERS				
Dimension	Limits	MIN	NOM	MAX	
Contact Pitch	Contact Pitch E		0.50 BSC		
Center Pad Width	X2	1.4			
Center Pad Length	Y2			1.35	
Contact Pad Spacing	С		3.00		
Contact Pad Width	X1			0.30	
Contact Pad Length	Y1			0.75	
Contact Pad to Center Pad	G1	0.27			
Contact Pad to Contact Pad	G2	0.20			
Thermal Via Diameter	V		0.33		

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.

2. For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-23509 Rev A

# APPENDIX A: REVISION HISTORY

#### Revision N (08/2021)

Added 24FC01 and Q6B package Automotive product offerings; Updated DFN and SOT-23 package drawings.

#### Revision M (02/2021)

Replaced terminology "Master" and "Slave" with "Host" and "Client" respectively; Changed "MUY" with "Q4B" part number for UDFN package; Updated SC-70, TSSOP and UDFN package drawings; Added Automotive Product Identification System.

#### Revision L (05/2019)

Corrected Part Marking for UDFN package; Added note about exposed pad on the TDFN and UDFN packages.

#### **Revision K (11/2018)**

Added the 24FC01 device.

#### Revision J (01/2009)

Added TDFN Package; Updated Package Drawings.

#### Revision H (08/2008)

Added SC-70 Package; Updated Package Drawings.

#### Revision G (03/2007)

Replaced Package Drawings (Rev. AM).

#### **Revision F (01/2007)**

Revised Device Selection Table; Revised Features Section; Changed 1.8V to 1.7V; Revised Table 1-1, 1-2, 8-1; Replaced Package Drawings; Revised Product ID System.

#### **Revision E**

Revised Figure 3-2 Control Byte Allocation; Figure 4-1 Byte Write; Figure 4-2 Page Write; Section 6.0 Write Protection; Figure 7-1 Current Address Read; Figure 7-2 Random Read; Figure 7-3 Sequential Read.

#### **Revision D**

Added DFN package.

#### **Revision C**

Corrections to Section 1.0, Electrical Characteristics and Section 9.1, 24LC01B standard marking code.

# THE MICROCHIP WEBSITE

Microchip provides online support via our website at www.microchip.com. This website is used as a means to make files and information easily available to customers. Accessible by using your favorite Internet browser, the website contains the following information:

- **Product Support** Data sheets and errata, application notes and sample programs, design resources, user's guides and hardware support documents, latest software releases and archived software
- General Technical Support Frequently Asked Questions (FAQ), technical support requests, online discussion groups, Microchip consultant program member listing
- Business of Microchip Product selector and ordering guides, latest Microchip press releases, listing of seminars and events, listings of Micro-chip sales offices, distributors and factory representatives

# CUSTOMER CHANGE NOTIFICATION SERVICE

Microchip's customer notification service helps keep customers current on Microchip products. Subscribers will receive e-mail notification whenever there are changes, updates, revisions or errata related to a specified product family or development tool of interest.

To register, access the Microchip website at www.microchip.com. Under "Support", click on "Customer Change Notification" and follow the registration instructions.

## **CUSTOMER SUPPORT**

Users of Microchip products can receive assistance through several channels:

- Distributor or Representative
- Local Sales Office
- Field Application Engineer (FAE)
- Technical Support

Customers should contact their distributor, representative or Field Application Engineer (FAE) for support. Local sales offices are also available to help customers. A listing of sales offices and locations is included in the back of this document.

Technical support is available through the website at: http://microchip.com/support

# **PRODUCT IDENTIFICATION SYSTEM (NON-AUTOMOTIVE)**

To order or obtain information, e.g., on pricing or delivery, refer to the factory or the listed sales office.

PART NO.	<u>IXI<sup>(1)</sup></u>	<del>-</del> *	<u>/xx</u>	Examples:
Device	Tape and Reel Option	Temperature Range	Package	<ul> <li>a) 24LC01BT-E/MC: Tape and Reel, Extended Temperature, 2.5V, DFN package.</li> <li>b) 24LC01BT-I/MS: Tape and Reel, Industrial</li> </ul>
Device: Tape and	24LC01B: = 2.5V 24FC01: = 1.7V Blank = Standard p	, High-Speed, 1-I backaging (tube c	l EEPROM Kbit I <sup>2</sup> C Serial EEPROM	<ul> <li>Temperature, 2.5V, MSOP package.</li> <li>c) 24AA01-I/P: Industrial Temperature, 1.7V, PDIP package.</li> <li>d) 24LC01BT-I/LT: Tape and Reel, Industrial Temperature, 2.5V, SC-70 package.</li> </ul>
Reel Option:				<ul> <li>e) 24AA01-I/SN: Industrial Temperature, 1.7V, SOIC package.</li> <li>f) 24AA01T-I/OT: Tape and Reel, Industrial</li> </ul>
Temperature Range:		i°C (Industrial) 25°C (Extended)		<ul> <li>g) 24AA01T-I/MNY: Tape and Reel, Industrial Temperature, 1.7V, SOT-23 package.</li> <li>g) 24AA01T-I/MNY: Tape and Reel, Industrial Temperature, 1.7V, TDFN package.</li> </ul>
Package:	Body, 8-Lea MS = Plastic Mic (MSOP) P = Plastic Dua LT = Plastic Sm (Tape and I SN = Plastic Sm 8-Lead (SC OT = Plastic Sm (Tape and I MNY = Plastic Dua Body, 8-Lea ST = Plastic Thin (TSSOP)	ad (DFN) ro Small Outline al In-Line – 300 n all Outline Transi Reel only) all Outline - Narro DC) all Outline Transi Reel only) al Flat, No Lead F ad (TDFN) n Shrink Small O al Flat, No Lead F	ackage – 2x3x1.0 mm, Package, 8-Lead hil Body, 8-Lead (PDIP) stor, 5-Lead (SC-70) ow, 3.90 mm Body, stor, 5-Lead (SOT-23) Package - 2x3x0.8 mm utline – 4.4 mm, 8-Lead Package - 2x3x0.6 mm	<ul> <li>Temperature, 1.7V, TDFN package.</li> <li>h) 24AA01T-I/ST: Tape and Reel, Industrial Temperature, 1.7V, TSSOP package.</li> <li>i) 24FC01-I/P: Industrial Temperature, 1.7V, PDIP package.</li> <li>j) 24FC01T-I/Q4B: Tape and Reel, Industrial Temperature, 1.7V, UDFN package.</li> <li>Note 1: Tape and Reel identifier only appears in the catalog part number description. This identifier is used for ordering purposes and is not printed on the device package. Check with your Microchip Sales Office for package availability with the Tape and Reel option.</li> </ul>

# **PRODUCT IDENTIFICATION SYSTEM (AUTOMOTIVE)**

To order or obtain information, e.g., on pricing or delivery, refer to the factory or the listed sales office.

PART NO.	<u>[X]</u> <sup>(1)</sup>	¥	<u>/xx</u>	<u>xxx<sup>(2, 3)</sup></u>	Examp	les:
Device	Tape and Reel Option	Temperature Range	Package	Variant	Áuto b) 24A	A01T-I/SN16KVAO: Tape and Reel, omotive Grade 3, 1.7V, SOIC Package. A01T-I/OT16KVAO: Tape and Reel,
Device:	24AA01: = 1.7 24LC01B: = 2.5 24FC01: = 1.7	5V, 1-Kbit I <sup>2</sup> C Sei	ial EEPRON	l	c) 24L0 Auto d) 24L0	omotive Grade 3, 1.7V, SOT-23 Package. C01BT-E/SN16KVAO: Tape and Reel, omotive Grade 1, 2.5V, SOIC Package. C01BT-E/OT16KVAO: Tape and Reel, omotive Grade 1,2.5V SOT-23 Package.
Tape and Reel Option:	Blank = Standa T = Tape a	rd packaging (tul nd Reel <sup>(1)</sup>	be or tray)		e) 2FC Auto f) 24F	01T-E/SN36KVAO: Tape and Reel, pmotive Grade 1, 1.7V SOIC Package. C01T-E/ST36KVAO: Tape and Reel,
Temperature Range:		o +85°C AEC-( o+125°C AEC-(			g) 24F Auto	omotive Grade 1, 1.7V TSSOP Package. C01T-E/OT36KVAO: Tape and Reel, omotive Grade 1, 1.7V SOT-23 Package. C01T-E/Q6B36KVAO: Tape and Reel,
Package:	OT = Plasti (SOT SN = Plasti 8-Lea ST = Plasti 8-Lea Q6B = Plasti	c Śmall Outline 1	Fransistor, 5- - Narrow, 3.9 nall Outline – .ead Wettable	Lead 0 mm Body, 4.4 mm, e Flanks	Note 1	<ul> <li>Tape and Reel identifier only appears in the catalog part number description. This identifier is used for ordering purposes and is not printed on the device package. Check with your Microchip Sales Office for package</li> </ul>
Variant <sup>(2,3)</sup> :	15KVAO = Sta 15KVXX = Cus Pro 16KVAO = Sta 16KVXX = Cus Pro 36KVAO = Sta 36KVXX = Cus	stomer-Specific A cess <sup>(4)</sup> ndard Automotive stomer-Specific A cess <sup>(4)</sup> ndard Automotive	utomotive, 1 e, 16K Proce utomotive, 1 e, 36K Proce	5K <sub>SS</sub> (4) 6K SS		<ul> <li>availability with the Tape and Reel option.</li> <li>2: The VAO/VXX automotive variants have been designed, manufactured, tested and qualified in accordance with AEC-Q100 requirements for automotive applications.</li> </ul>
						<ol> <li>For customers requesting a PPAP, a customer-specific part number will be generated and provided. A PPAP is not provided for VAO part numbers.</li> </ol>
					4	4: Not recommended for new designs.

#### Note the following details of the code protection feature on Microchip devices:

- Microchip products meet the specifications contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is secure when used in the intended manner and under normal conditions.
- There are dishonest and possibly illegal methods being used in attempts to breach the code protection features of the Microchip devices. We believe that these methods require using the Microchip products in a manner outside the operating specifications contained in Microchip's Data Sheets. Attempts to breach these code protection features, most likely, cannot be accomplished without violating Microchip's intellectual property rights.
- Microchip is willing to work with any customer who is concerned about the integrity of its code.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of its code. Code protection does not
  mean that we are guaranteeing the product is "unbreakable." Code protection is constantly evolving. We at Microchip are
  committed to continuously improving the code protection features of our products. Attempts to break Microchip's code protection
  feature may be a violation of the Digital Millennium Copyright Act. If such acts allow unauthorized access to your software or
  other copyrighted work, you may have a right to sue for relief under that Act.

Information contained in this publication is provided for the sole purpose of designing with and using Microchip products. Information regarding device applications and the like is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications.

THIS INFORMATION IS PROVIDED BY MICROCHIP "AS IS". MICROCHIP MAKES NO REPRESENTATIONS OR WAR-RANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY, AND FITNESS FOR A PARTICULAR PURPOSE OR WARRANTIES RELATED TO ITS CONDITION, QUALITY, OR PERFORMANCE.

IN NO EVENT WILL MICROCHIP BE LIABLE FOR ANY INDI-RECT, SPECIAL, PUNITIVE, INCIDENTAL OR CONSEQUEN-TIAL LOSS, DAMAGE, COST OR EXPENSE OF ANY KIND WHATSOEVER RELATED TO THE INFORMATION OR ITS USE, HOWEVER CAUSED, EVEN IF MICROCHIP HAS BEEN ADVISED OF THE POSSIBILITY OR THE DAMAGES ARE FORESEEABLE. TO THE FULLEST EXTENT ALLOWED BY LAW, MICROCHIP'S TOTAL LIABILITY ON ALL CLAIMS IN ANY WAY RELATED TO THE INFORMATION OR ITS USE WILL NOT EXCEED THE AMOUNT OF FEES, IF ANY, THAT YOU HAVE PAID DIRECTLY TO MICROCHIP FOR THE INFORMATION. Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights unless otherwise stated.

#### Trademarks

The Microchip name and logo, the Microchip logo, Adaptec, AnyRate, AVR, AVR logo, AVR Freaks, BesTime, BitCloud, chipKIT, chipKIT logo, CryptoMemory, CryptoRF, dsPIC, FlashFlex, flexPWR, HELDO, IGLOO, JukeBlox, KeeLoq, Kleer, LANCheck, LinkMD, maXStylus, maXTouch, MediaLB, megaAVR, Microsemi, Microsemi logo, MOST, MOST logo, MPLAB, OptoLyzer, PackeTime, PIC, picoPower, PICSTART, PIC32 logo, PolarFire, Prochip Designer, QTouch, SAM-BA, SenGenuity, SpyNIC, SST, SST Logo, SuperFlash, Symmetricom, SyncServer, Tachyon, TimeSource, tinyAVR, UNI/O, Vectron, and XMEGA are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

AgileSwitch, APT, ClockWorks, The Embedded Control Solutions Company, EtherSynch, FlashTec, Hyper Speed Control, HyperLight Load, IntelliMOS, Libero, motorBench, mTouch, Powermite 3, Precision Edge, ProASIC, ProASIC Plus, ProASIC Plus logo, Quiet-Wire, SmartFusion, SyncWorld, Temux, TimeCesium, TimeHub, TimePictra, TimeProvider, WinPath, and ZL are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Adjacent Key Suppression, AKS, Analog-for-the-Digital Age, Any Capacitor, AnyIn, AnyOut, Augmented Switching, BlueSky, BodyCom, CodeGuard, CryptoAuthentication, CryptoAutomotive, CryptoCompanion, CryptoController, dsPICDEM, dsPICDEM.net, Dynamic Average Matching, DAM, ECAN, Espresso T1S, EtherGREEN, IdealBridge, In-Circuit Serial Programming, ICSP, INICnet, Intelligent Paralleling, Inter-Chip Connectivity, JitterBlocker, maxCrypto, maxView, memBrain, Mindi, MiWi, MPASM, MPF, MPLAB Certified logo, MPLIB, MPLINK, MultiTRAK, NetDetach, Omniscient Code Generation, PICDEM, PICDEM.net, PICkit, PICtail, PowerSmart, PureSilicon, QMatrix, REAL ICE, Ripple Blocker, RTAX, RTG4, SAM-ICE, Serial Quad I/O, simpleMAP, SimpliPHY, SmartBuffer, SMART-I.S., storClad, SQI, SuperSwitcher, SuperSwitcher II, Switchtec, SynchroPHY, Total Endurance, TSHARC, USBCheck, VariSense, VectorBlox, VeriPHY, ViewSpan, WiperLock, XpressConnect, and ZENA are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

The Adaptec logo, Frequency on Demand, Silicon Storage Technology, and Symmcom are registered trademarks of Microchip Technology Inc. in other countries.

GestIC is a registered trademark of Microchip Technology Germany II GmbH & Co. KG, a subsidiary of Microchip Technology Inc., in other countries.

All other trademarks mentioned herein are property of their respective companies.

 $\ensuremath{\textcircled{\sc 0}}$  2007-2021, Microchip Technology Incorporated, All Rights Reserved.

ISBN: 978-1-5224-8420-2

For information regarding Microchip's Quality Management Systems, please visit www.microchip.com/quality.



# Worldwide Sales and Service

#### AMERICAS

**Corporate Office** 2355 West Chandler Blvd. Chandler, AZ 85224-6199 Tel: 480-792-7200 Fax: 480-792-7277 Technical Support: http://www.microchip.com/ support

Web Address: www.microchip.com

Atlanta Duluth, GA Tel: 678-957-9614 Fax: 678-957-1455

Austin, TX Tel: 512-257-3370

Boston Westborough, MA Tel: 774-760-0087 Fax: 774-760-0088

Chicago Itasca, IL Tel: 630-285-0071 Fax: 630-285-0075

Dallas Addison, TX Tel: 972-818-7423 Fax: 972-818-2924

Detroit Novi, MI Tel: 248-848-4000

Houston, TX Tel: 281-894-5983

Indianapolis Noblesville, IN Tel: 317-773-8323 Fax: 317-773-5453 Tel: 317-536-2380

Los Angeles Mission Viejo, CA Tel: 949-462-9523 Fax: 949-462-9608 Tel: 951-273-7800

Raleigh, NC Tel: 919-844-7510

New York, NY Tel: 631-435-6000

San Jose, CA Tel: 408-735-9110 Tel: 408-436-4270

Canada - Toronto Tel: 905-695-1980 Fax: 905-695-2078

#### ASIA/PACIFIC

Australia - Sydney Tel: 61-2-9868-6733

China - Beijing Tel: 86-10-8569-7000 China - Chengdu

Tel: 86-28-8665-5511 China - Chongqing Tel: 86-23-8980-9588

China - Dongguan Tel: 86-769-8702-9880

China - Guangzhou Tel: 86-20-8755-8029

China - Hangzhou Tel: 86-571-8792-8115

China - Hong Kong SAR Tel: 852-2943-5100

China - Nanjing Tel: 86-25-8473-2460

China - Qingdao Tel: 86-532-8502-7355

China - Shanghai Tel: 86-21-3326-8000

China - Shenyang Tel: 86-24-2334-2829

China - Shenzhen Tel: 86-755-8864-2200

China - Suzhou Tel: 86-186-6233-1526

China - Wuhan Tel: 86-27-5980-5300

China - Xian Tel: 86-29-8833-7252

China - Xiamen Tel: 86-592-2388138

#### ASIA/PACIFIC

India - Bangalore Tel: 91-80-3090-4444

India - New Delhi Tel: 91-11-4160-8631 India - Pune

Tel: 91-20-4121-0141 Japan - Osaka

Tel: 81-6-6152-7160 Japan - Tokyo

Tel: 81-3-6880- 3770 Korea - Daegu

Tel: 82-53-744-4301 Korea - Seoul

Tel: 82-2-554-7200

Malaysia - Kuala Lumpur Tel: 60-3-7651-7906

Malaysia - Penang Tel: 60-4-227-8870

Philippines - Manila Tel: 63-2-634-9065

Singapore Tel: 65-6334-8870

Taiwan - Hsin Chu Tel: 886-3-577-8366

Taiwan - Kaohsiung Tel: 886-7-213-7830

Taiwan - Taipei Tel: 886-2-2508-8600

Thailand - Bangkok Tel: 66-2-694-1351

Vietnam - Ho Chi Minh Tel: 84-28-5448-2100

Tel: 49-7131-72400 Germany - Karlsruhe Tel: 49-721-625370

EUROPE

Austria - Wels

Tel: 43-7242-2244-39

Tel: 45-4485-5910

Fax: 45-4485-2829

Tel: 358-9-4520-820

Tel: 33-1-69-53-63-20

Fax: 33-1-69-30-90-79

Germany - Garching

Tel: 49-2129-3766400

Germany - Heilbronn

Tel: 49-8931-9700

Germany - Haan

Finland - Espoo

France - Paris

Fax: 43-7242-2244-393

Denmark - Copenhagen

Germany - Munich Tel: 49-89-627-144-0 Fax: 49-89-627-144-44

Germany - Rosenheim Tel: 49-8031-354-560

Israel - Ra'anana Tel: 972-9-744-7705

Italy - Milan Tel: 39-0331-742611 Fax: 39-0331-466781

Italy - Padova Tel: 39-049-7625286

**Netherlands - Drunen** Tel: 31-416-690399 Fax: 31-416-690340

Norway - Trondheim Tel: 47-7288-4388

Poland - Warsaw Tel: 48-22-3325737

Romania - Bucharest Tel: 40-21-407-87-50

Spain - Madrid Tel: 34-91-708-08-90 Fax: 34-91-708-08-91

Sweden - Gothenberg Tel: 46-31-704-60-40

Sweden - Stockholm Tel: 46-8-5090-4654

**UK - Wokingham** Tel: 44-118-921-5800 Fax: 44-118-921-5820

China - Zhuhai Tel: 86-756-3210040

# **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

# Microchip:

24AA01T-I/SNG 24AA014-I/PG 24LC01B/ST 24LC01BT-I/STG 24LC01BT-I/SNG 24LC01BT-I/OTG 24AA014T-I/STG 24AA014T-I/SNG 24AA014-I/MS 24AA014-I/ST 24AA014-I/SN 24LC01B-I/STG 24LC01B-I/SNG 24AA01-I/MS 24AA01-I/PG 24AA01T-I/OT 24AA01T-I/SN 24AA01T-I/ST 24AA014-I/SNG 24AA014-I/STG 24AA014-I/SN 24AA01-I/ST 24AA01T/SN 24AA01-I/MSG 24AA01T-I/STG 24LC01BT/OT 24LC01BT/ST 24LC01BT/SN 24AA01T-I/MSG 24LC01B-I/MSG 24AA01-I/P 24AA014-I/MSG 24LC01B-I/SN 24LC01B-I/ST 24LC01BT/SN 24LC01B-I/SN 24LC01B-I/ST 24LC01BT-E/ST 24LC01BT-E/OT 24LC01B-I/PG 24LC01BT-E/SN 24AA01/P 24LC01BT-I/MSG 24AA01-I/VOTG 24AA014-I/P 24AA014T-I/MS 24AA014T-I/ST 24AA014T-I/SN 24LC01B/SN 24AA01-I/SNG 24AA01-I/STG 24AA014-I/P 24AA014T-I/MS 24AA01/SN 24LC01BP 24LC01B-I/P 24AA014T-I/MSG 24LC01BT-I/OT 24LC01BT-I/MS 24LC01BT-E/P 24AA01/SN 24LC01B/P 24LC01B-I/P 24AA014T-I/MS 24AA014H-I/SN 24LC01BHT-I/ST 24LC01BHT-I/ST 24LC01BT-I/SN 24AA014HT-I/MS 24AA014HT-I/MS 24AA014HT-I/MS 24AA014H-I/P 24AA014H-I/MS 24LC01BH-E/MS 24LC01BH-1/MS 24LC01BHT-E/MS 24AA014HT-I/SN 24LC01BHT-I/ST 24LC01BHT-E/OT 24LC01BH-E/MS 24LC01BHT-I/SN 24AA014HT-I/MS 24AA014HT-I/SN 24LC01BHT-I/ST 24LC01BHT-E/ST 24LC01BH-E/MS 24LC01BHT-I/SN 24LC01BHT-I/OT 24AA014H-I/P 24AA014H-I/MS 24LC01BH-E/P 24LC01BHT-I/SN 24LC01BHT-I/ST 24LC01BHT-I/ST 24AA014H-I/P 24AA014H-I/MS 24LC01BH-E/MS 24LC01BHT-I/SN 24LC01BHT-I/ST 24LC01BHT-I/ST 24LC01BHT-E/SN 24LC01BH-E/ST 24LC01BH-E/MS 24LC01BHT-I/SN 24LC01BHT-I/ST 24LC01BHT-I/ST 24LC01BHT-E/SN 24LC01BH-E/ST 24LC01BHT-I/MS 24LC01BHT-I/SN 24LC01BHT-I/ST 24LC01BHT-E/SN 24LC01BH-E/ST 24LC01BHT-I/MS 24LC01BHT-I/SN 24LC01BHT-I/ST 24LC01BHT-E/SN 24LC01BH-E/ST 24LC01BHT-I/MS 24LC01BHT-I/ST 24LC01BHT-I/SN 24LC01BHT-E/SN 24LC01BH-E/ST 24LC01BHT-I/MS 24LC01BHT-E/MNY 24LC01BHT-I/ST 24AA014+I/MNY 24LC01B-E/MS 24LC01BH-E/LT 24LC01BHT-E/MNY 24LC01BHT-E/MNY 24LC01BT-I/MNY