# High efficiency, three-digit LED Numeric Display

**LB-603 FP Series** Datasheet

The LB-603 FP series were designed to meet the need for multi-digit numeric displays.

These LED numeric displays use GaAsP on GaP(red), GaP(green) for the emitting material and are housed in an epoxy resin package.

They are three-digit displays with a character height of 14.3mm.


#### Features

- 1) Height of character: 14.3mm.
- 2) The package surface is painted black and the segments are colored the display color.
- 3) High efficiency reflectors are used to achieve a bright, clear display.

## ● **Dimensions** (Unit: mm)

# 37.5 12.5 12.5 ]10° 3-φ1.5 8.0 8.0 (2.54)Tolerance are ±0.2 unless otherwise noted:

#### Pin assignments




Pin No.	Function
1	Segment "e1"
2	Segment "d1"
3	Digit 1 Common
4	Segment "c1"
5	D.P1
6	Segment "e2"
7	Segment "d2"
8	Segment "c2"
9	D.P2
10	Segment "e3"
11	Segment "d3"
12	Segment "g3"
13	Segment "c3"
14	D.P3
15	Segment "b3"
16	Segment "a3"
17	Segment "f3"
18	Digit 3 Common
19	Digit 2 Common
20	Segment "b2"
21	Segment "a2"
22	Seament "a2"

## Selection guide

Emitting color Common	Red	Green
Anode	LB-603VF	LB-603MF
Cathode	LB-603VP	LB-603MP

4	Segment "c1"
5	D.P1
6	Segment "e2"
7	Segment "d2"
8	Segment "c2"
9	D.P2
10	Segment "e3"
11	Segment "d3"
12	Segment "g3"
13	Segment "c3"
14	D.P3
15	Segment "b3"
16	Segment "a3"
17	Segment "f3"
18	Digit 3 Common
19	Digit 2 Common
20	Segment "b2"
21	Segment "a2"
22	Segment "g2"
23	Segment "f2"
24	Segment "b1"
25	Segment "a1"
26	Digit 1 Common
27	Segment "f1"
28	Segment "g1"

#### •Internal circuit schematic

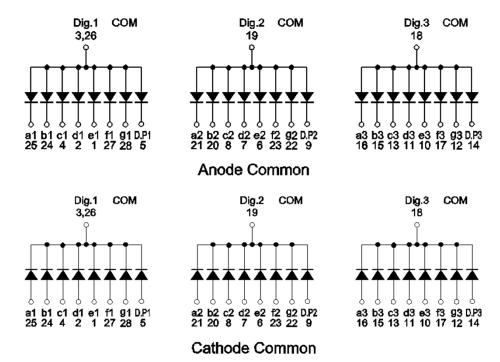

## ●Absolute maximum ratings (T<sub>a</sub> = 25°C)

Parameter	Symbol	Red	Green	Unit
	,	LB-603VF / VP	LB-603MF / MP	
Power dissipation	$P_{D}$	960	1440	mW
Power dissipation	P <sub>D</sub> / seg	40	60	mW
Forward current	I <sub>F</sub>	15	20	mA
Peak forward current	I <sub>FP</sub>	60 *	60 *	mA
Reverse voltage	$V_R$	5 5		V
Operating temperature	$T_{opr}$	-25 to +75		
Storage temperature	T <sub>stg</sub>	-30 to +85		

<sup>\*</sup> Pulse width 1ms, duty 1 / 5

## ●Electrical and optical characteristics (T<sub>a</sub> = 25°C)

Parameter Symbol		Conditions	Red		Green			Unit	
	·		Min.	Тур.	Max.	Min.	Тур.	Max.	
Forward voltage	$V_{F}$	I <sub>F</sub> =10mA	-	2.0	2.8	1	2.1	2.8	V
Reverse current	I <sub>R</sub>	$V_R = 3V$	-	-	100	-	-	100	μΑ
Peak wavelength	$\lambda_{p}$	I <sub>F</sub> =10mA	-	650	-	-	563	1	nm
Spectral line halfwidth	Δλ	I <sub>F</sub> =10mA	-	40	-	-	40	-	nm

O Not designed for radiation resistance.

## Luminous intensity

Parameter	$\lambda_{p}$	Туре	Min.	Тур.	Max.	Unit
Red 650		LB-603VF	LB-603VF 5.6			mad
		LB-603VP	5.0	16	-	mcd
Green 563		LB-603MF	9	25		mod
		LB-603MP	9	25	1	mcd

<sup>©</sup> Condition I<sub>F</sub>=10mA

## ●Iv classification

Parameter	Туре	Item	lv classification	Unit
	LB-603VF LB-603VP	" L "	5.6 to 11	mcd
		" M "	9.0 to 18	mcd
RAG I		" N "	14 to 28	mcd
		"P"	22 to 45	mcd
		" Q "	36 to (71)	mcd
Green	LB-603MF LB-603MP	" M "	9.0 to 18	mcd
		" N "	14 to 28	mcd
		"P"	22 to 45	mcd
		" Q "	36 to 71	mcd
		" R "	56 to (110)	mcd

 $<sup>\</sup>bigcirc$  Condition  $I_F=10mA$ 

### •Electrical and optical characteristics curves

Fig.1 Forward Current vs. Forward Voltage

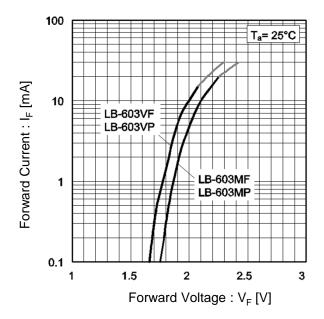


Fig.2 Relative Luminous Intensity vs. Forward Current

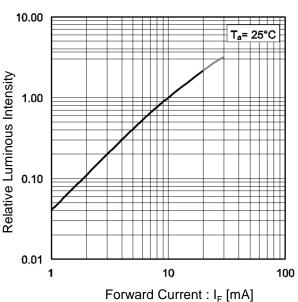


Fig.3 Relative Luminous Intensity vs. Case Temperature


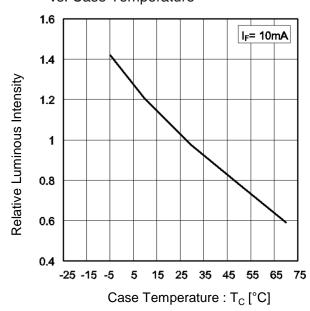


Fig.4 Ratio of Maximum Tolerable Peak Current vs. Pulse Duration (I)

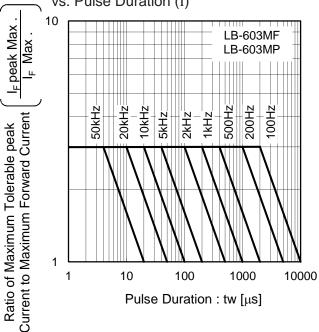

## •Electrical and optical characteristics curves

Fig.5 Ratio of Maximum Tolerable Peak Current vs. Pulse Duration (II)


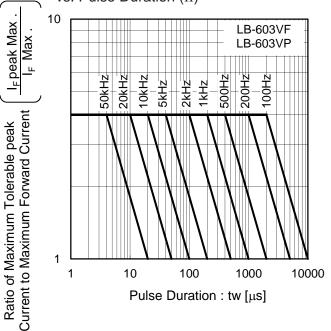


Fig.6 Derating



#### Notes

- 1) The information contained herein is subject to change without notice.
- Before you use our Products, please contact our sales representative and verify the latest specifications.
- 3) Although ROHM is continuously working to improve product reliability and quality, semiconductors can break down and malfunction due to various factors. Therefore, in order to prevent personal injury or fire arising from failure, please take safety measures such as complying with the derating characteristics, implementing redundant and fire prevention designs, and utilizing backups and fail-safe procedures. ROHM shall have no responsibility for any damages arising out of the use of our Poducts beyond the rating specified by ROHM.
- 4) Examples of application circuits, circuit constants and any other information contained herein are provided only to illustrate the standard usage and operations of the Products. The peripheral conditions must be taken into account when designing circuits for mass production.
- 5) The technical information specified herein is intended only to show the typical functions of and examples of application circuits for the Products. ROHM does not grant you, explicitly or implicitly, any license to use or exercise intellectual property or other rights held by ROHM or any other parties. ROHM shall have no responsibility whatsoever for any dispute arising out of the use of such technical information.
- 6) The Products are intended for use in general electronic equipment (i.e. AV/OA devices, communication, consumer systems, gaming/entertainment sets) as well as the applications indicated in this document.
- 7) The Products specified in this document are not designed to be radiation tolerant.
- 8) For use of our Products in applications requiring a high degree of reliability (as exemplified below), please contact and consult with a ROHM representative : transportation equipment (i.e. cars, ships, trains), primary communication equipment, traffic lights, fire/crime prevention, safety equipment, medical systems, servers, solar cells, and power transmission systems.
- Do not use our Products in applications requiring extremely high reliability, such as aerospace equipment, nuclear power control systems, and submarine repeaters.
- 10) ROHM shall have no responsibility for any damages or injury arising from non-compliance with the recommended usage conditions and specifications contained herein.
- 11) ROHM has used reasonable care to ensure the accuracy of the information contained in this document. However, ROHM does not warrants that such information is error-free, and ROHM shall have no responsibility for any damages arising from any inaccuracy or misprint of such information.
- 12) Please use the Products in accordance with any applicable environmental laws and regulations, such as the RoHS Directive. For more details, including RoHS compatibility, please contact a ROHM sales office. ROHM shall have no responsibility for any damages or losses resulting non-compliance with any applicable laws or regulations.
- 13) When providing our Products and technologies contained in this document to other countries, you must abide by the procedures and provisions stipulated in all applicable export laws and regulations, including without limitation the US Export Administration Regulations and the Foreign Exchange and Foreign Trade Act.
- 14) This document, in part or in whole, may not be reprinted or reproduced without prior consent of ROHM.

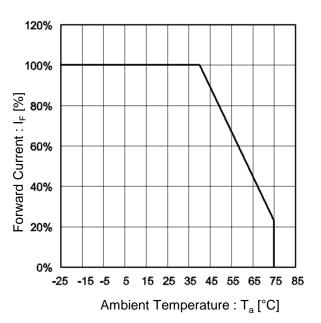

Thank you for your accessing to ROHM product informations. More detail product informations and catalogs are available, please contact us.

## ROHM Customer Support System

http://www.rohm.com/contact/



## lb-603vp - Web Page

**Distribution Inventory** 

Part Number	lb-603vp
Package	LB-603VP
Unit Quantity	200
Minimum Package Quantity	
Packing Type	Filmpack
Constitution Materials List	inquiry
RoHS	Yes