
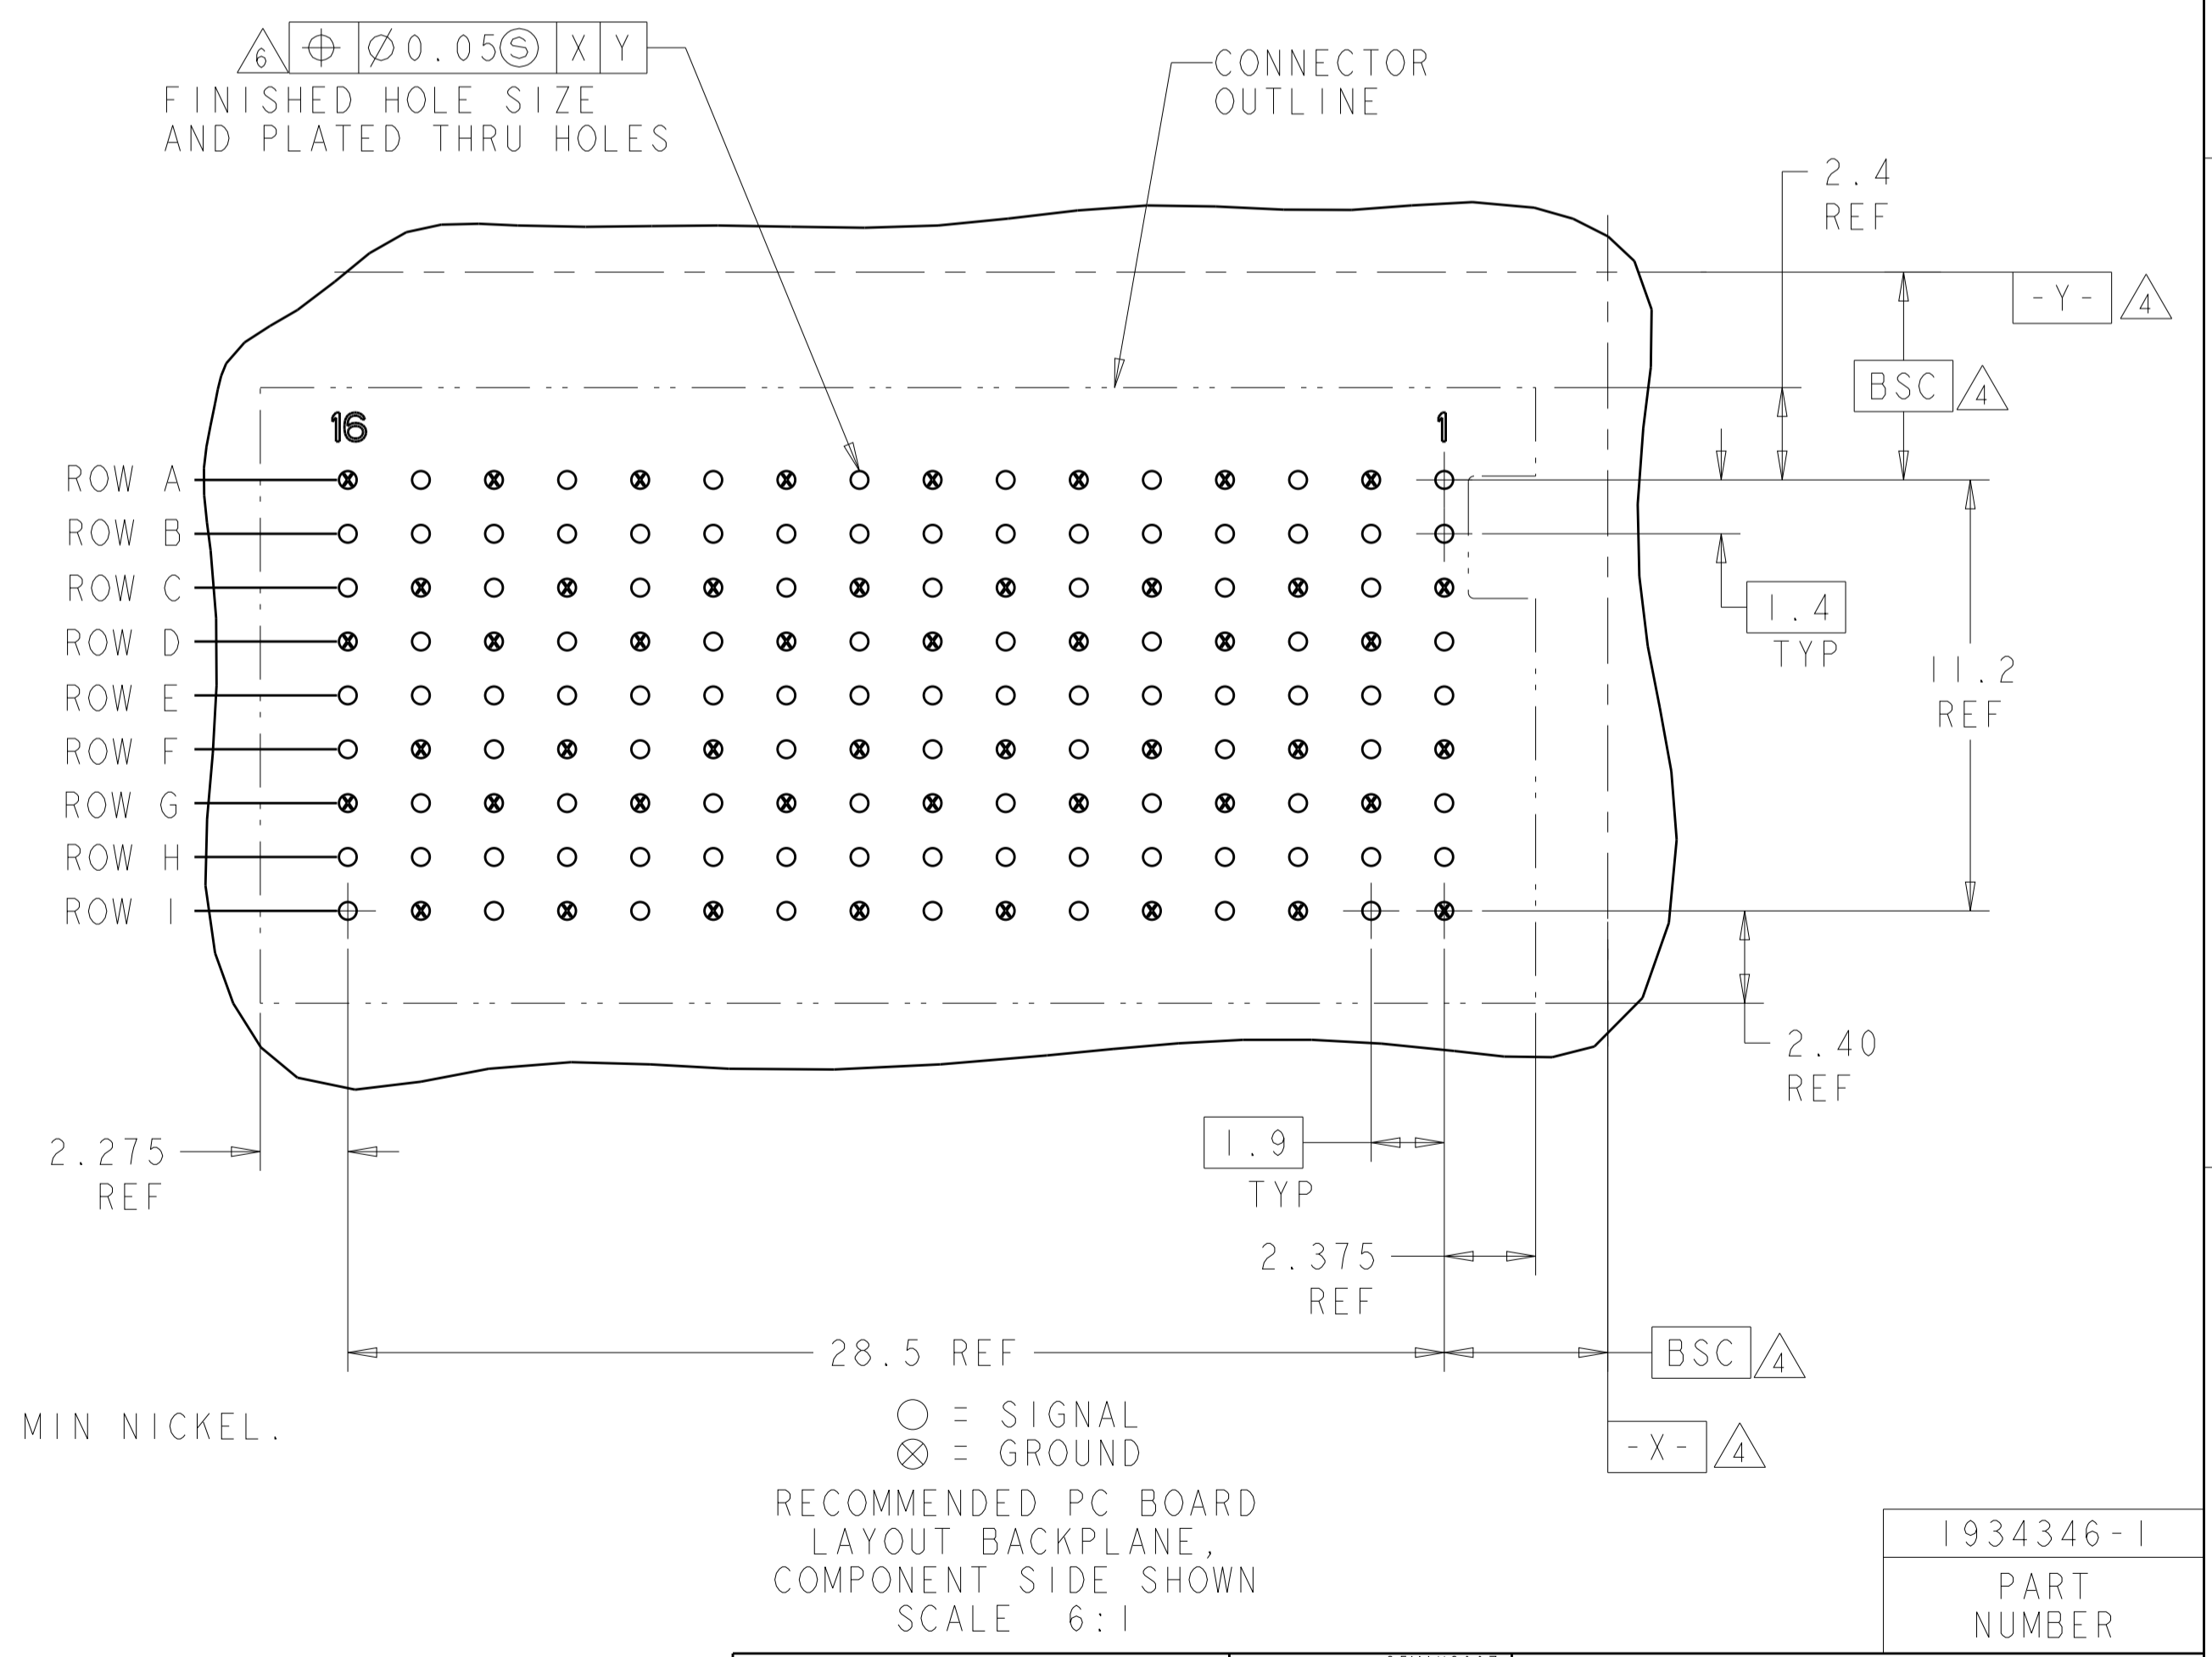
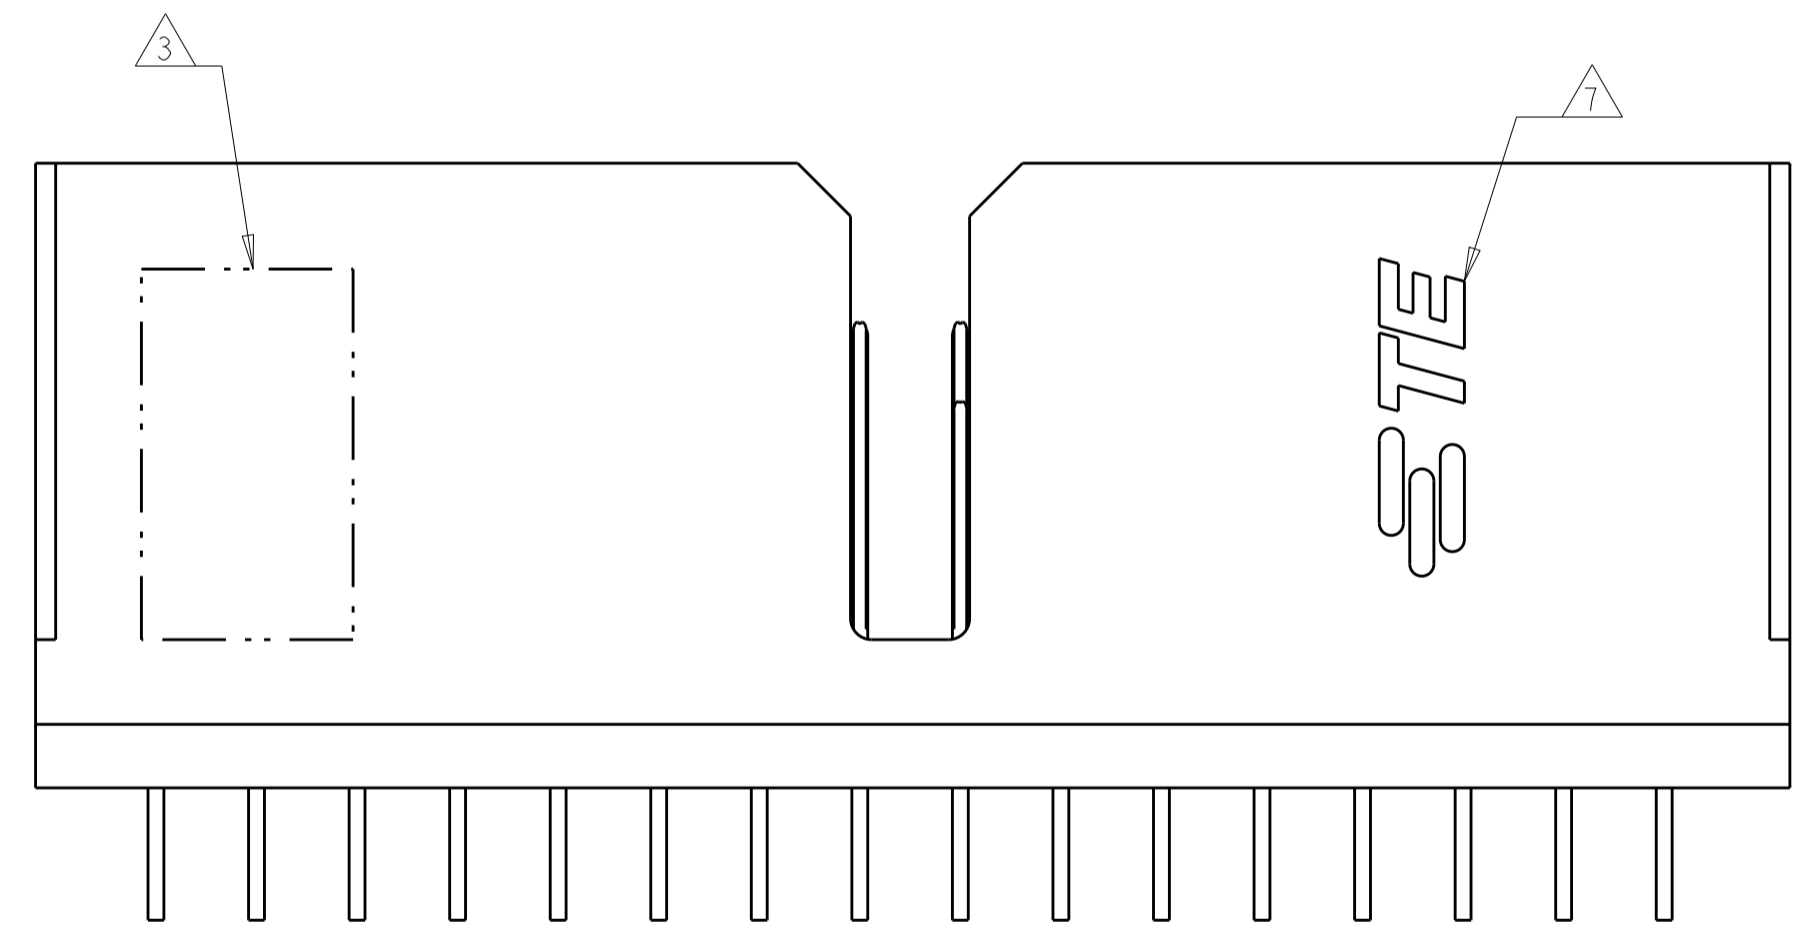
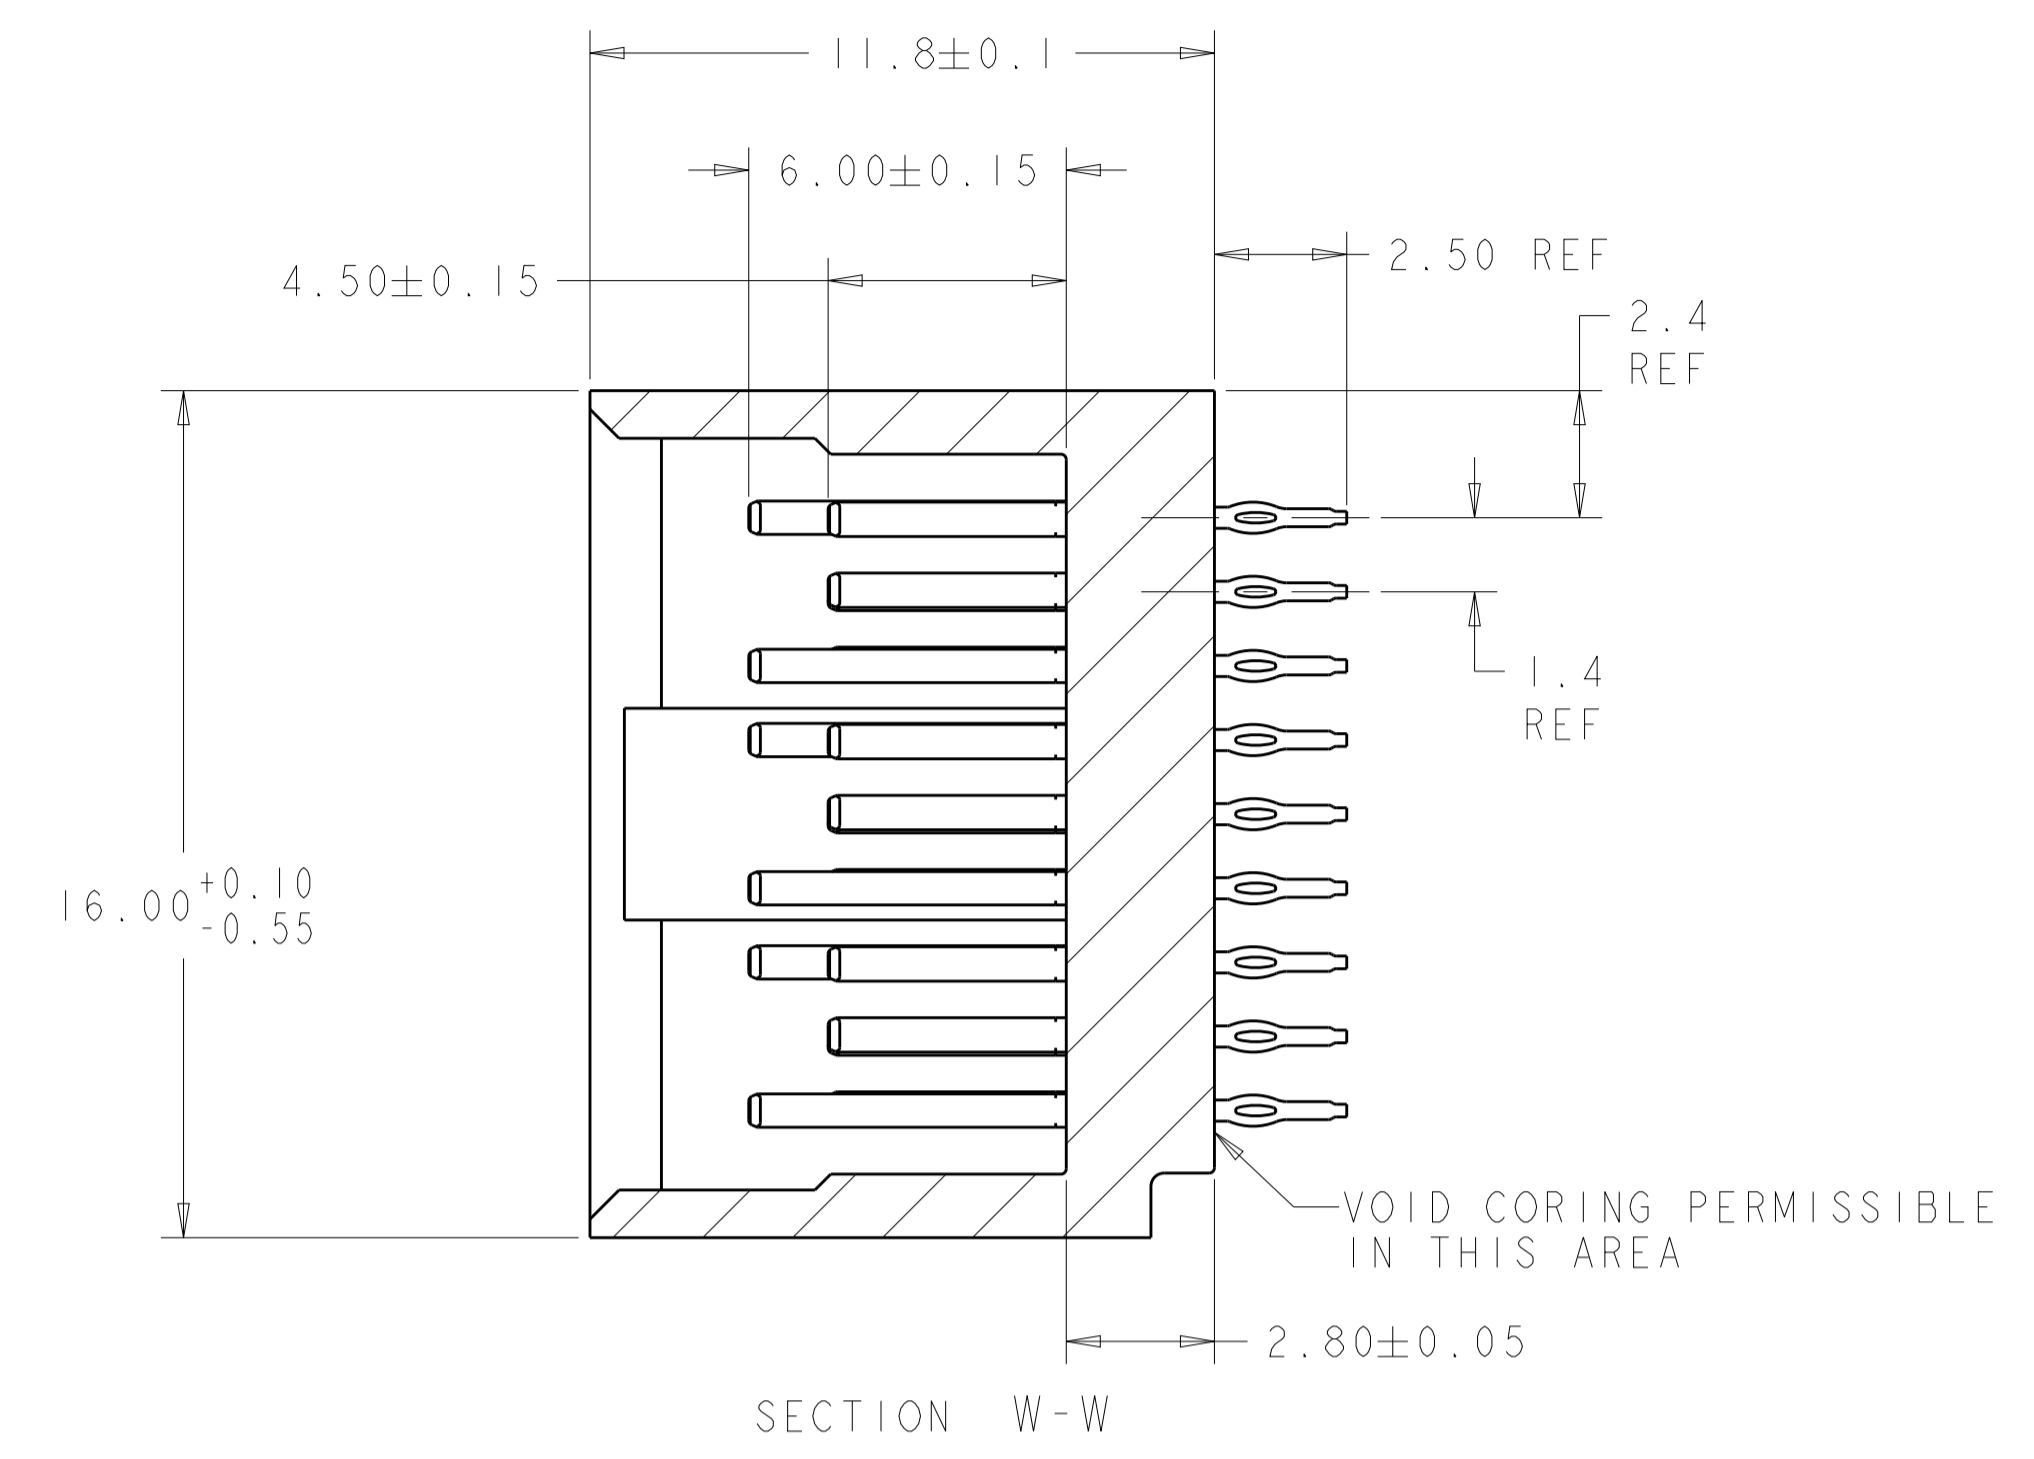
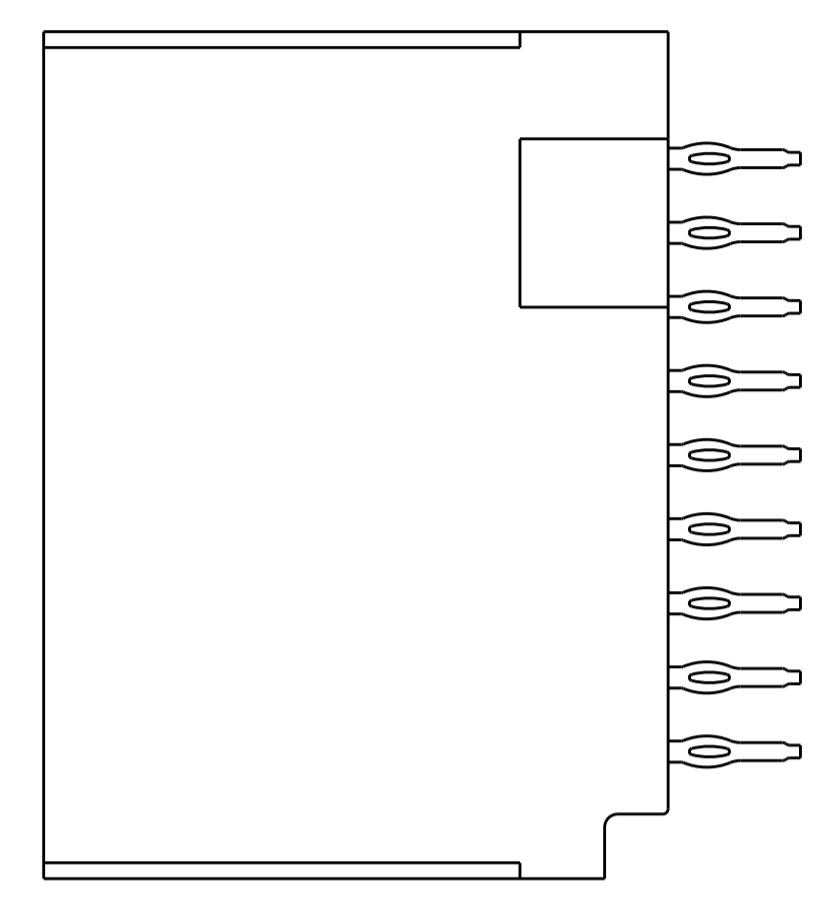


LOC	DIST	REVISIONS			
GP	00	REV	DATE	BY	CHK
		F	07AUG2013	KH	RP
		G	05JUL2019	AP	SY

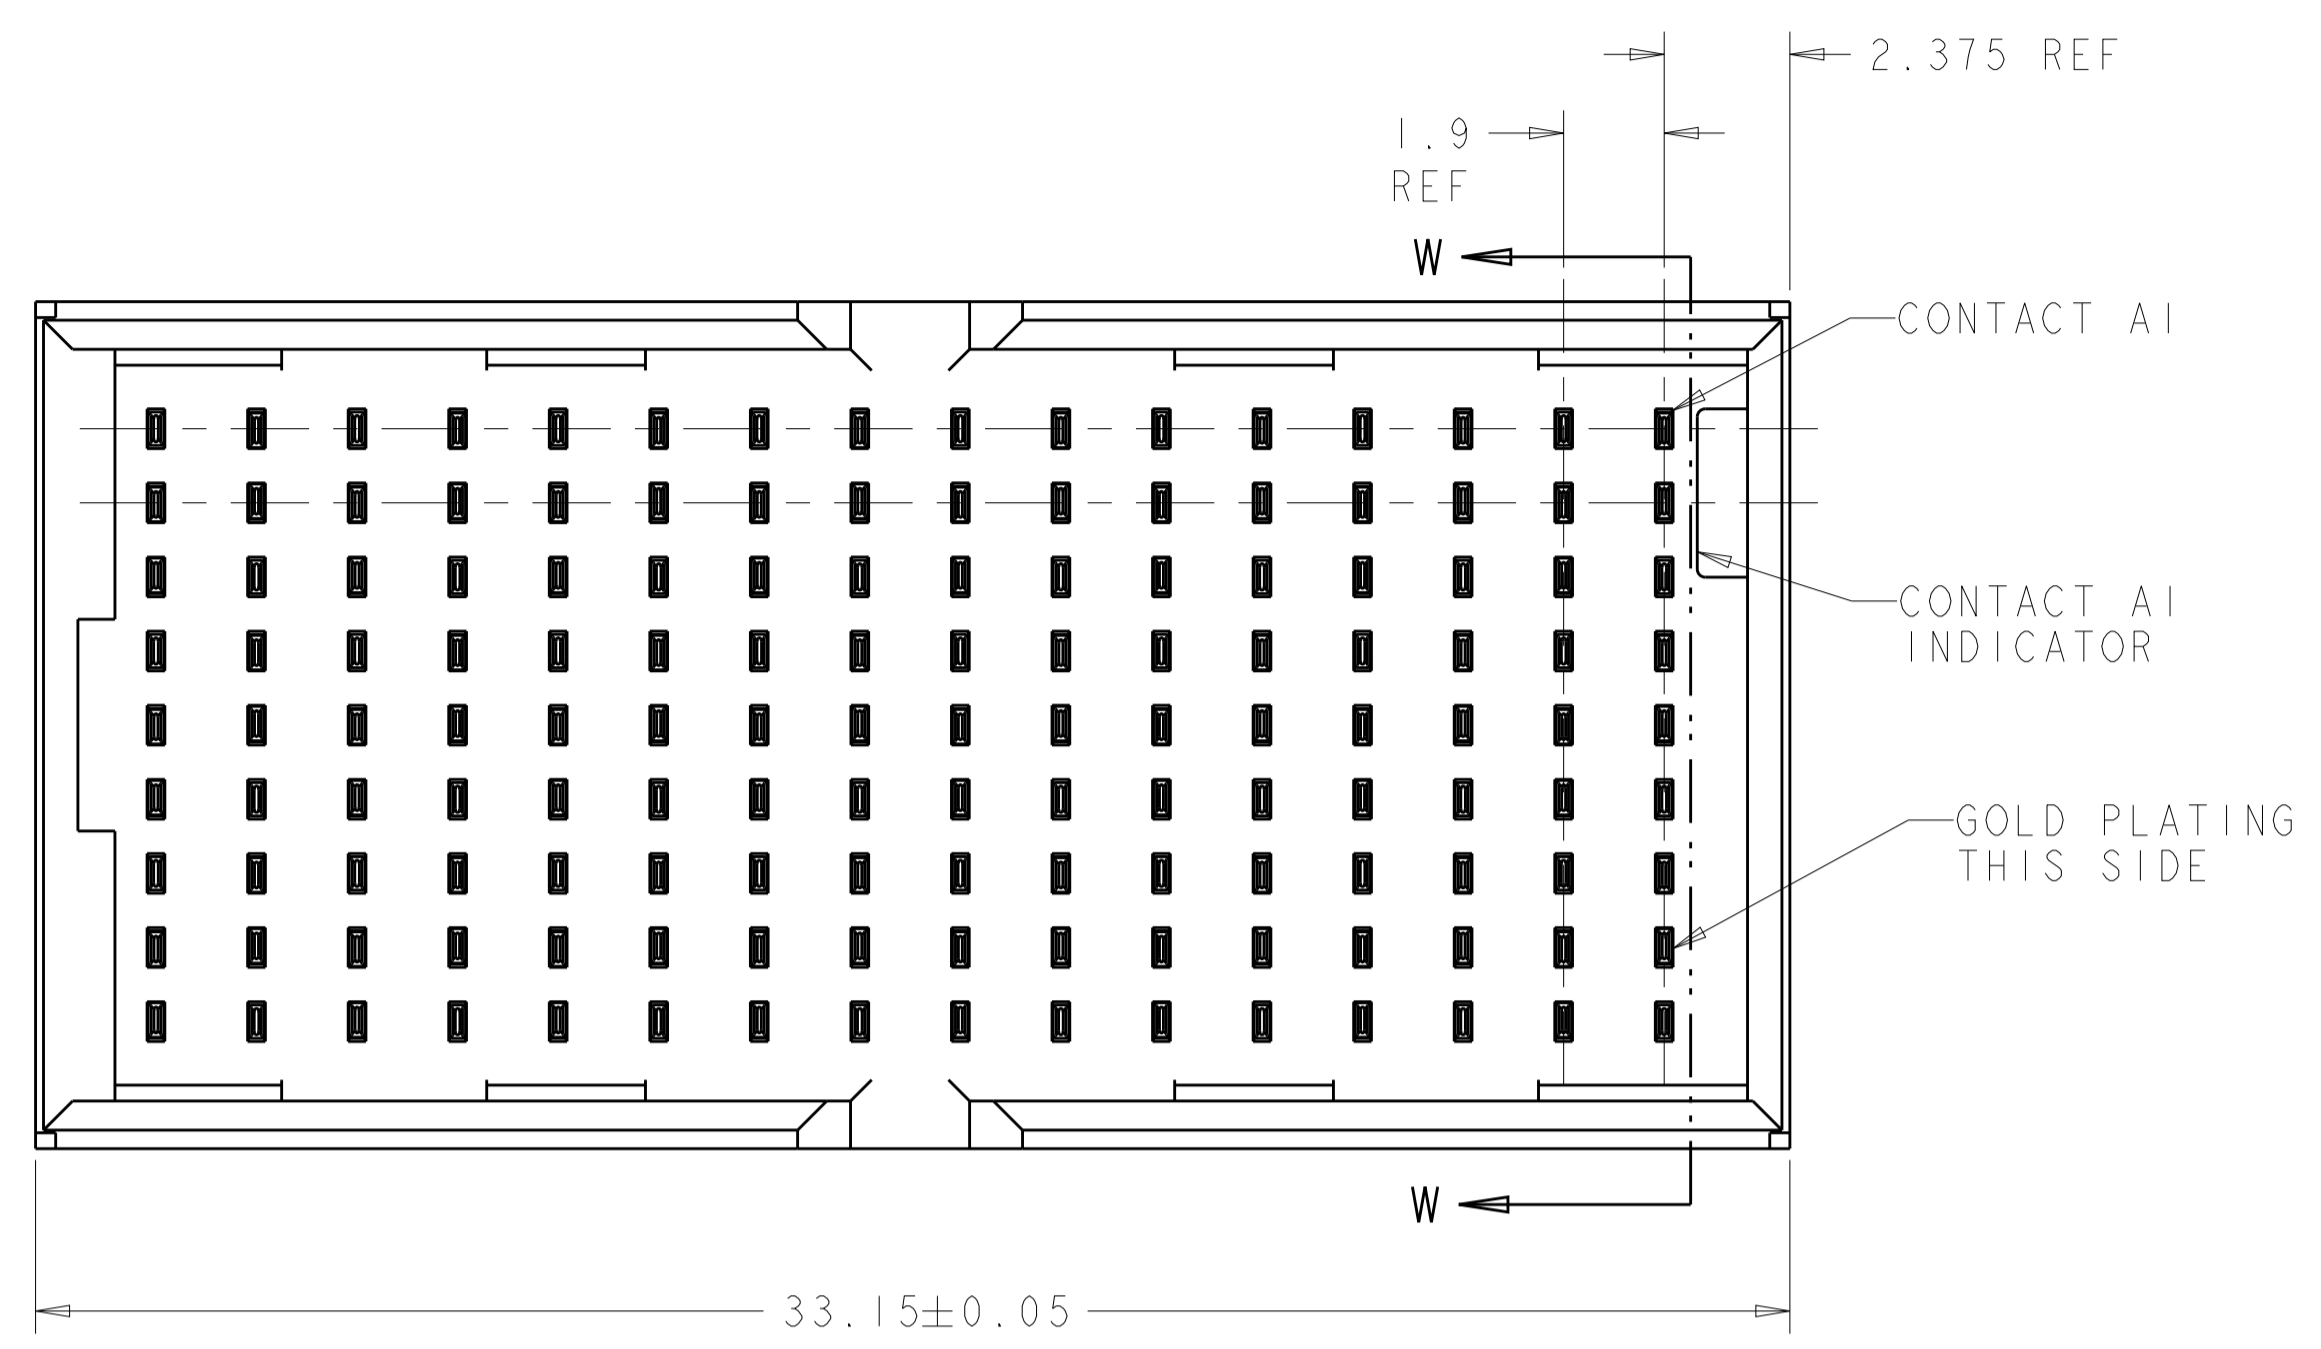

△ SHOWN LOGO OR OTHER TE OWNED LOGOS IN APPROXIMATE AREA.

- △ MATERIAL:  
CONTACT - PHOS BRONZE  
HOUSING - LCP, UL 94V-0, COLOR - BLACK
- △ FINISH:  
CONTACT AREA FINISH CONFORMS TO THE REQUIREMENTS OF TE PRODUCT SPECIFICATION 108-2303; BASED ON TELCORDIA GR-1217-CORE FOR SYSTEM QUALITY LEVEL III, APPLICATIONS IN CONTROLLED ENVIRONMENTS (CENTRAL OFFICE).  
COMPLIANT PIN AREA- 0.5µm MIN MATTE TIN OVER 1.27µm MIN NICKEL.
- △ CONNECTOR MARKED WITH PART NUMBER, DATE CODE AND STANDARD IN APPROXIMATE AREA SHOWN
- △ DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- 5. CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT. TECHNICAL REFERENCE GR-1217-CORE, ISSUE 1, NOVEMBER 1995.
- △ REFERENCE APPLICATION SPEC 114-13202 FOR RECOMMENDED PLATED THRU HOLE DIAMETER AND PLATING THICKNESSES.

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN: B. MCMASTER 25MAY2007	TE Connectivity 1934346-1 PART NUMBER	
DIMENSIONS: mm		CHK: W. DAVIS 25MAY2007		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD: W. DAVIS 25MAY2007	NAME: HEADER ASSEMBLY, DOUBLE ENDED, 3 PAIR, 16 COLUMN TinMan	
0 PLC ±	1 PLC ±	PRODUCT SPEC	SIZE: A1 00779 C=1934346	
2 PLC ±	3 PLC ±	APPLICATION SPEC	RESTRICTED TO	
4 PLC ±	ANGLES ±	WEIGHT	SCALE: 7:1 SHEET 1 OF 1 REV G	
MATERIAL: △	FINISH: △	CUSTOMER DRAWING		

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1934346-1](#)