



528-AG11D-ESL Product Details

 **Live Product Chat** US Only
8:30am - 5pm ET, Mon - Fri

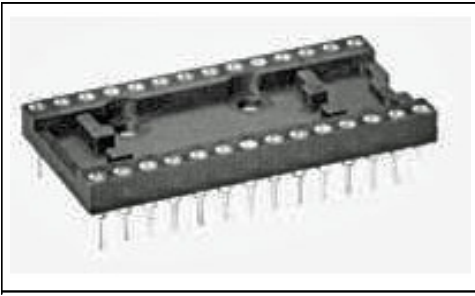

528-AG11D-ESL
(5-1437536-7)
 [Active](#)

DIP Sockets

[5 of 6 EU RoHS/ELV Compliant](#) ([Find RoHS Compliant Alternates/Statement of Compliance](#))

Product Highlights:

- DIP Socket
- Number of Positions = 28
- Row-to-Row Spacing = 15.24 mm
- Thru Hole
- Mount Style = Vertical

[View all Features](#) | [Find Similar Products](#)

Quick Links

[Check Pricing & Availability](#)
[Search for Tooling](#)
[Product Feature Selector](#)
[Contact Us About This Product](#)

Documentation & Additional Information

Product Drawings:

- [500 Series Socket](#) (PDF, English)

Catalog Pages/Data Sheets:

- None Available

Product Specifications:

- None Available

Application Specifications:

- None Available

Instruction Sheets:

- None Available

CAD Files:

- None Available

Additional Information:

- [Product Line Information](#)

Related Products:

- [Tooling](#)

[List all Documents](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- [Product Type](#) = DIP Socket
- [Number of Positions](#) = 28
- Profile = Standard
- [Frame Style](#) = Closed
- [Leg Style](#) = Straight
- Sleeve Material = Brass/Copper
- Product Series = 500 Series

Electrical Characteristics:

- Insulation Resistance (M?) = 5,000
- Contact Resistance (m?) = 10

Termination Related Features:

- [Termination \(Solder\) Post Length \(mm \[in\]\)](#) = 3.18 [0.125]
- Solder Tail Contact Plating = Tin-Lead

Body Related Features:

- [Row-to-Row Spacing \(mm \[in\]\)](#) = 15.24 [0.600]
- [Mount Style](#) = Vertical
- [Centerline \(mm \[in\]\)](#) = 2.54 [0.100]

Contact Related Features:

- [Contact Mount](#) = Thru Hole
- [Contact Material](#) = Beryllium Copper
- [Contact Mating Area Plating Material](#) = Gold (5)
- [Contact Style](#) = Stamped + Formed
- [Mating Contact Type](#) = Four-Fingered

Configuration Related Features:

- [Height Above PC Board \(mm \[in\]\)](#) = 4.57 [0.180]

Industry Standards:

- [RoHS/ELV Compliance](#) = ELV compliant, 5 of 6 Compliant
- [Lead Free Solder Processes](#) = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C

Conditions for Usage:

- Temperature Range (°C) = 125

Packaging Related Features:

- [Packaging Method](#) = Tube

Other:

- Brand = AMP